

Printed Quick Reference Card Sofirn LT1 Lantern



Large Size



OFF
Quick Reference
See manual for full instructions

[Long-Press] ▶ Turns ON Moon mode - [Press & Hold] to ramp up

[1-Click] ▶ Turns ON to previously used brightness
[2-Clicks] ▶ Turns ON maximum brightness
[3-Clicks] ▶ **Battery check** indicated by blinks (i.e.4-blinks, short pause, 1-blink indicates 4.1 volt - "zero" Is indicated with a very quick blink - Exit with [1-Click]
4.2v: 100% charged | 3.7v: 50% charged | 3.1v: 10% charged
[4-Clicks] ▶ **Enable/Disable** electronic Lockout- if enabled, only [Press & Hold] will turn the LEDs ON
[6-Clicks] ▶ Enters **Muggle Mode** - restricted to ON/OFF & ramping
[7-Clicks] ▶ Configures the **Switch LED** indicator (every [7-clicks] cycles through OFF/LOW/HIGH/BLINKING modes)

[2-Clicks] [Long-Press] ▶ Enters **Blinky and Strobes** mode - then [2-Clicks] to cycle through available modes - [1-Click] to exit



ON
Runtime: 5 hours (brightest) ■ Charge time: 8-10 hours

[Press&Hold] ▶ **Ramps** brightness UP/DOWN
[1-Click] ▶ Turns OFF
[2-Clicks] ▶ Maximum brightness-then [2-Clicks] returns to previous
[3-Clicks] ▶ Toggles **Smooth/Stepped** mode
[6-Clicks] ▶ Exits **Muggle Mode**

[2-Clicks & Hold] ▶ Enters **Tint Mode**-ramps from 2,800-5,000K


BLF LT1 Lantern
sofirn
sofirnlight.com

Factory RESET: Loosen battery tube - [Press & Hold] - tighten battery tube then [Hold] for 3 seconds
Sofirn Revision: 10/05/19 - Quick Reference version: 1.01

© 2021 Rob McCormack - Released under: Creative Commons Attribution 4.0 International Public License

Mini-size to fit inside battery tube

Write "If Found Contact: _____" on back of sheet.
Fold sheet in half, then rollup and insert in center of battery tube.

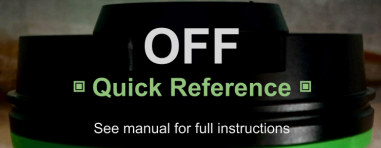

OFF
Quick Reference
See manual for full instructions

[Long-Press] ▶ Turns ON Moon mode - [Press & Hold] to ramp up

[1-Click] ▶ Turns ON to previously used brightness
[2-Clicks] ▶ Turns ON maximum brightness
[3-Clicks] ▶ **Battery check** indicated by blinks (i.e.4-blinks, short pause, 1-blink indicates 4.1 volt - "zero" Is indicated with a very quick blink - Exit with [1-Click]
4.2v: 100% charged | 3.7v: 50% charged | 3.1v: 10% charged
[4-Clicks] ▶ **Enable/Disable** electronic Lockout- if enabled, only [Press & Hold] will turn the LEDs ON
[6-Clicks] ▶ Enters **Muggle Mode** - restricted to ON/OFF & ramping
[7-Clicks] ▶ Configures the **Switch LED** indicator (every [7-clicks] cycles through OFF/LOW/HIGH/BLINKING modes)

[2-Clicks] [Long-Press] ▶ Enters **Blinky and Strobes** mode - then [2-Clicks] to cycle through available modes - [1-Click] to exit



ON
Runtime: 5 hours (brightest) ■ Charge time: 8-10 hours

[Press&Hold] ▶ **Ramps** brightness UP/DOWN
[1-Click] ▶ Turns OFF
[2-Clicks] ▶ Maximum brightness-then [2-Clicks] returns to previous
[3-Clicks] ▶ Toggles **Smooth/Stepped** mode
[6-Clicks] ▶ Exits **Muggle Mode**

[2-Clicks & Hold] ▶ Enters **Tint Mode**-ramps from 2,800-5,000K

BLF LT1 Lantern
sofirn
sofirnlight.com

Factory RESET: Loosen battery tube - [Press & Hold] - tighten battery tube then [Hold] for 3 seconds
Sofirn Revision: 10/05/19 - Quick Reference version: 1.01

© 2021 Rob McCormack - Released under: Creative Commons Attribution 4.0 International Public License