
# Yoosee fast operating guide V1.6

(Suitable for device of 7601WiFi modules)

Version explanation:

20171207:V1.6 Simplify & normalize operating process.

## I. Learn about your camera

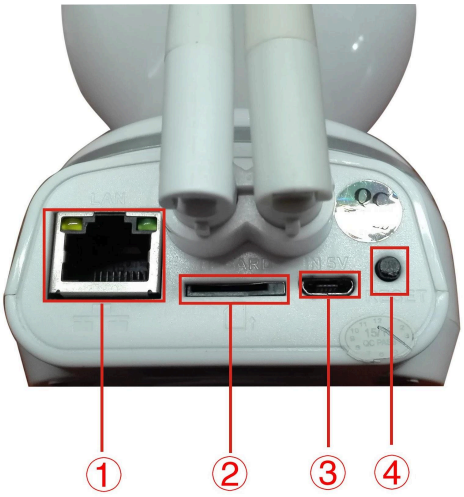


**1. Ethernet port  2.TF card port  3.power port  4.reset button**




**5: deploying alarm light 6: recording light 7: alarm light 8:network light**;

You can check whether camera works properly or not by watching below indicator light:

| indicator light | always on | twinkle | Off |
|---|---|---|---|
| deploying alarm light | deployed alarm | deploying alarm | no deploying alarm |
| recording light | with TF card | recording | no TF card |
| alarm light | alarming | — | no alarm |
| network light | connected properly | connecting | no connection |


## II. Download & install Yoosee APP for phone

Go to Apple APP Store or Android Google Play and search for Yoosee or you can go to www.yoosee.co to download & install Yoosee then finish registration according to the instructions and log in.


## III. Add camera

### 1. Register & log in

App can be registered via phone numbers and e-mail addresses as well as via WeChat.
Note: phone numbers registration is only limited in China currently and also do use true e-mail addresses better for finding forgotten password back in the future.

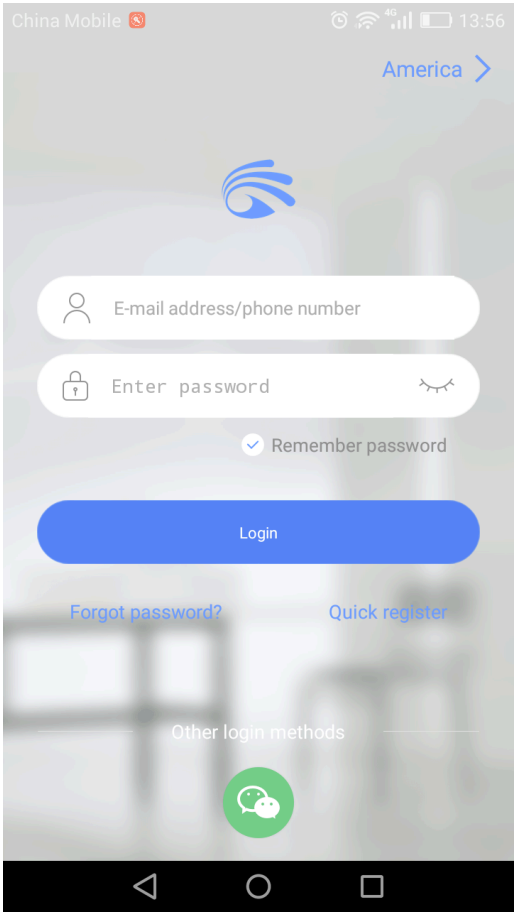



**Process of adding new devices**

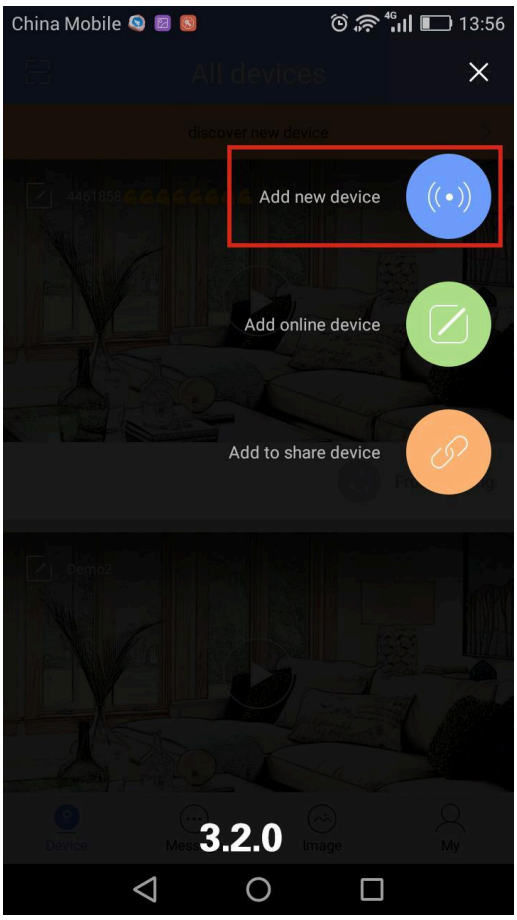



Device needs to be back to initialized status by pressing the “reset” button for 5 seconds when adding new devices.

**Smart link**

Select smart link→select Wi-Fi→connecting →keep phone close to device→connecting Wi-Fi→connecting successfully→input device default password, skip it if no default password→done.

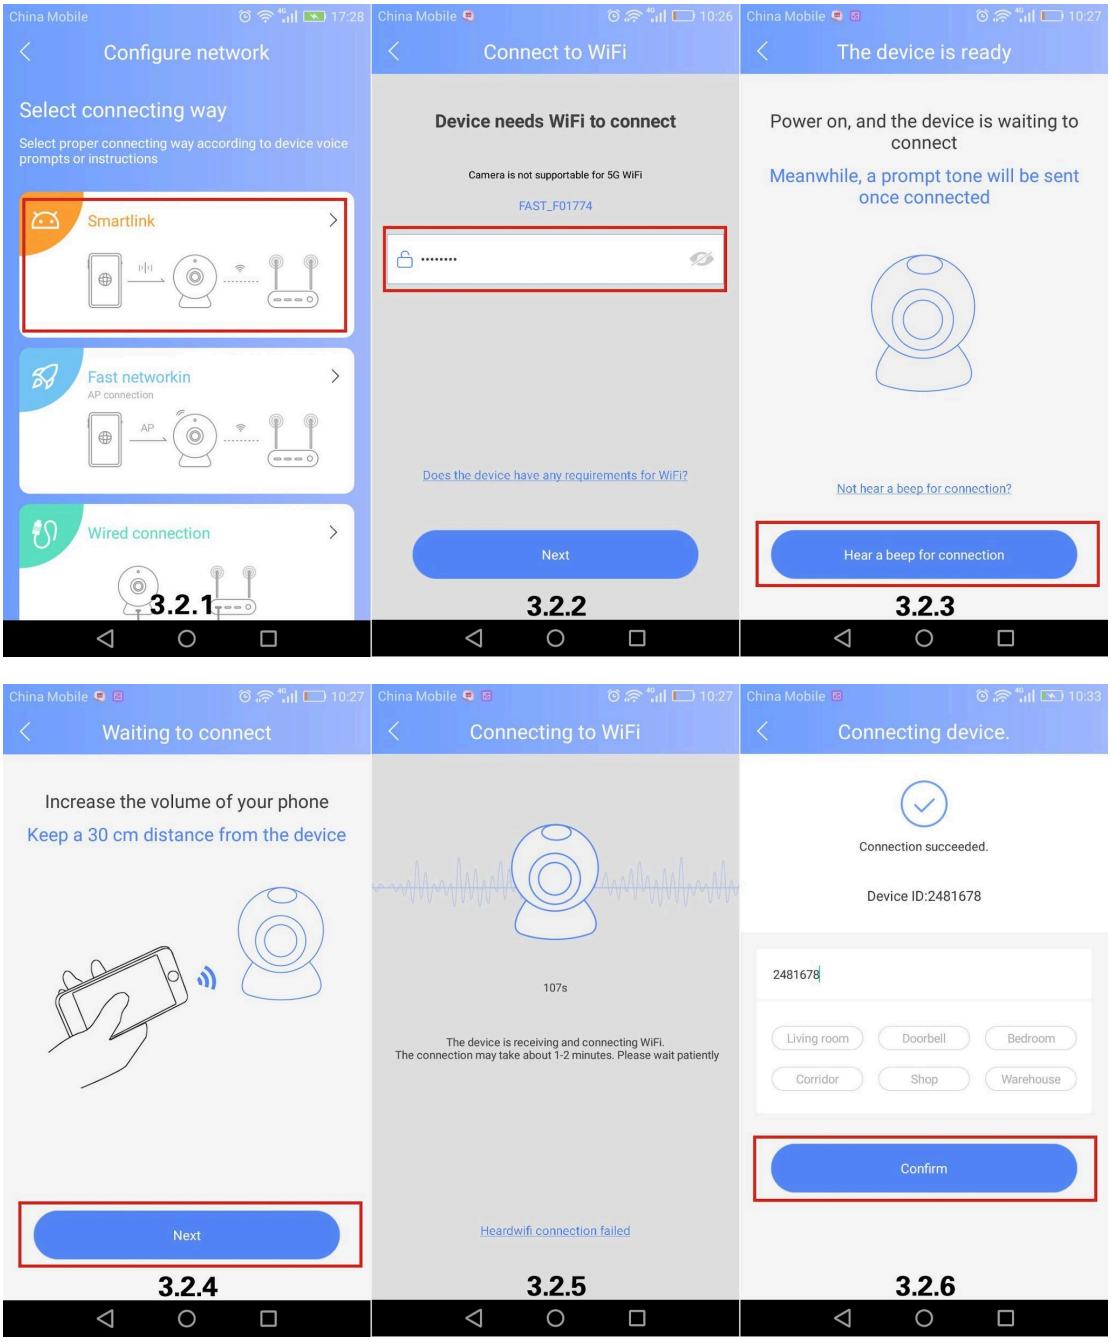


If this is your first time to add this camera, you are the owner of it after adding. You can click on the “share “button on the right upper corner (see pic 3.2.7) and share to your friends.

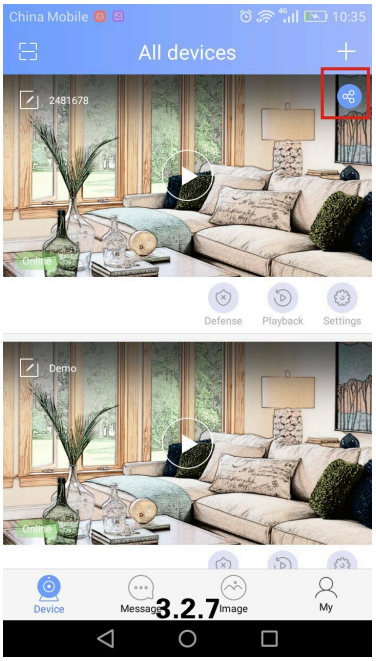



It might fail to connect device when using Smart link due to restrictions of some routers, please try wired connection when it fails.

**Wired adding**

Select wired connection→select wanted device in new device listings→create device name(please input default password manually if device got one) →save

## IV. Sharing to friends

Click on “sharing” button and enter into sharing interface (see pic.4.1.2) then share camera to friends, please see below picture.

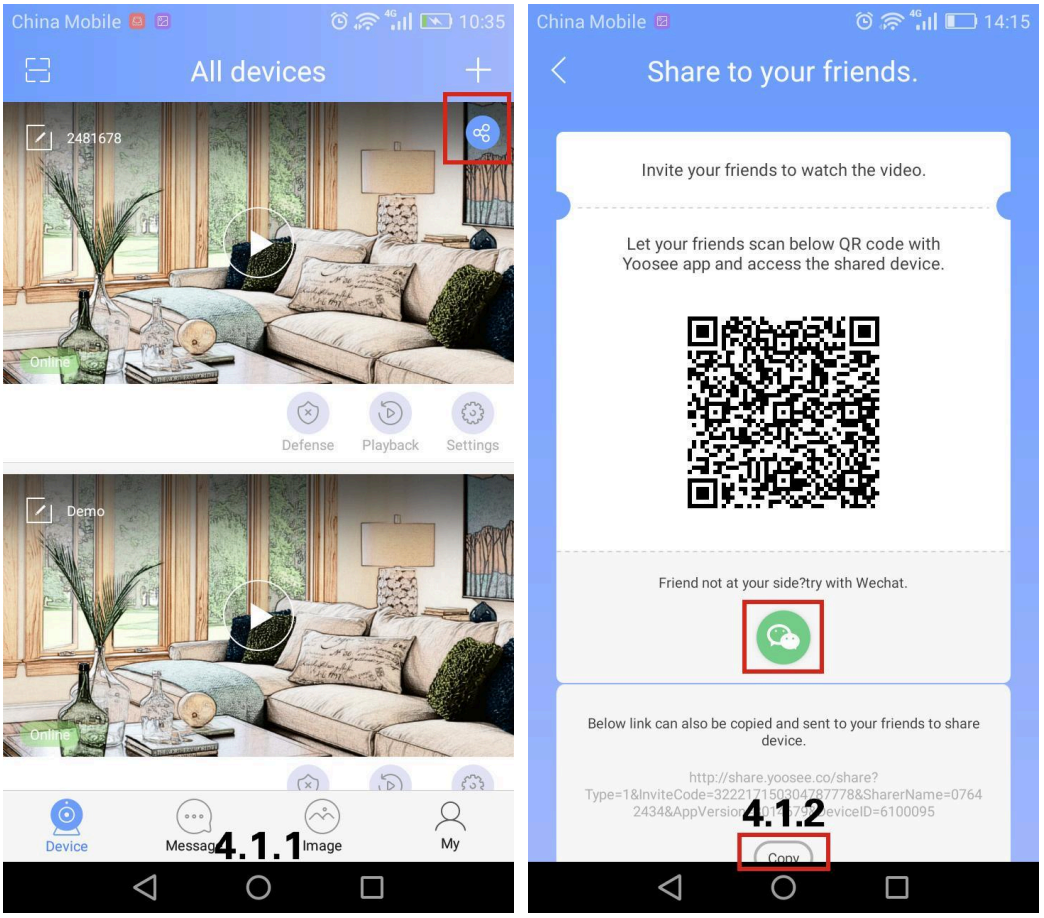



Please ask your friends to install, register and login the latest Yoosee version.

How does your friends add sharing camera?

If friends nearby.


Ask your friends to open APP→click on “scan” →scan the QR code→jump to the interface of adding sharing device(see pic 4.2.3) →done.

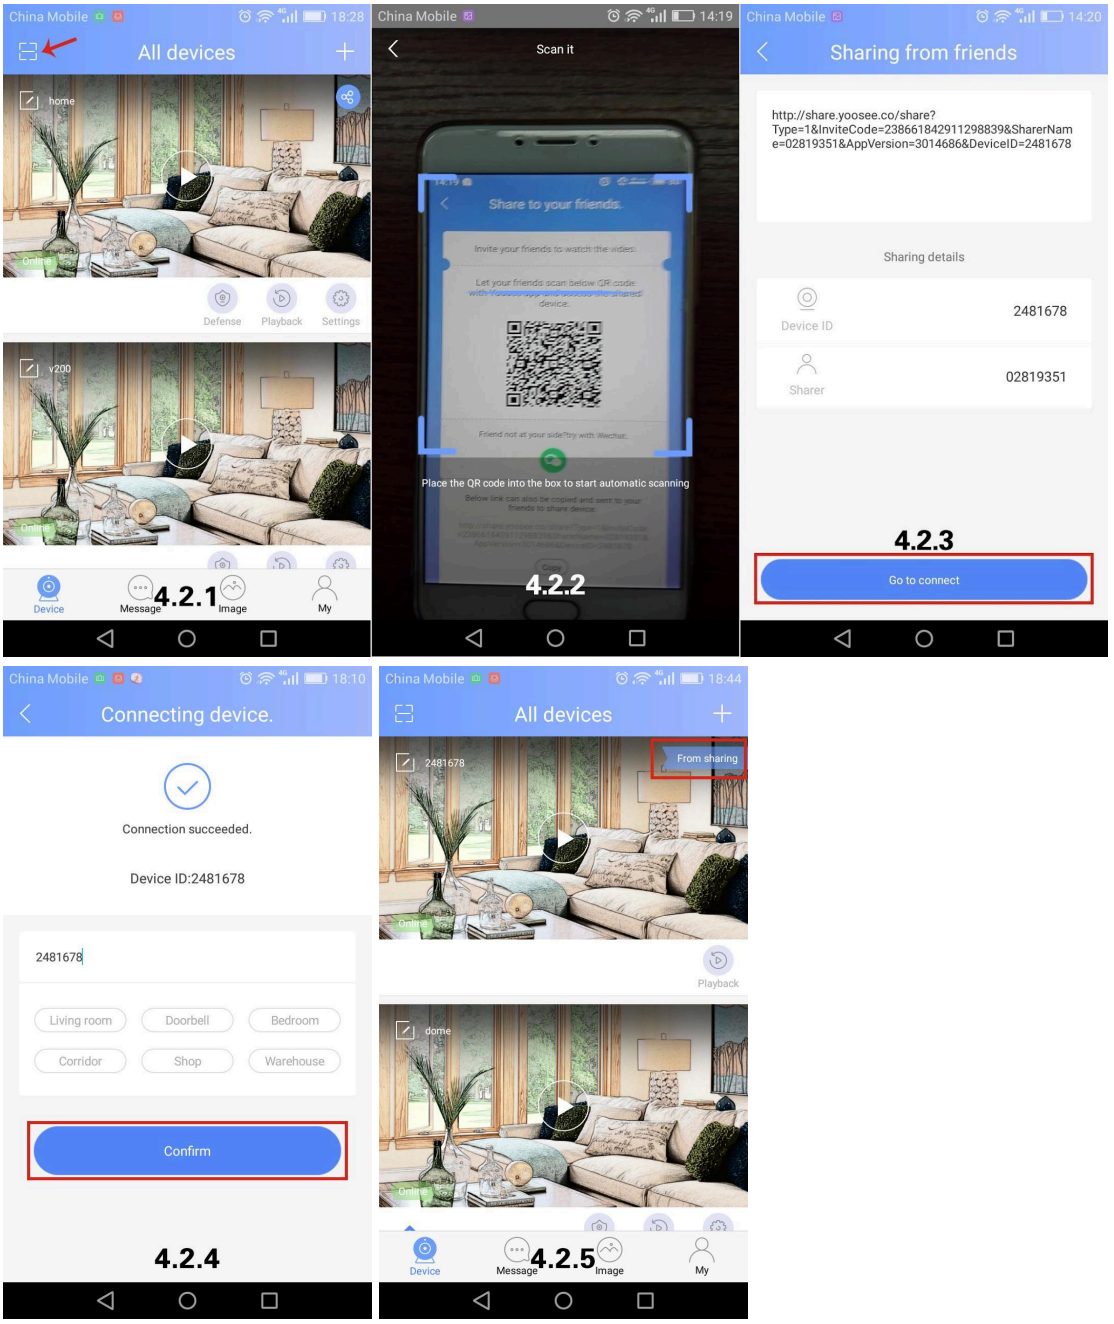



If friends not nearby.


You can share the link to friends by social networking tools (WeChat 、Line、WhatsApp is supported), details are as follows:

Click on the link on WeChat→click the button on right upper corner (see pic 4.3.2) →open it via browser→enter into the interface of being invited→jump to the interface of adding sharing device(see pic 4.3.3) →done

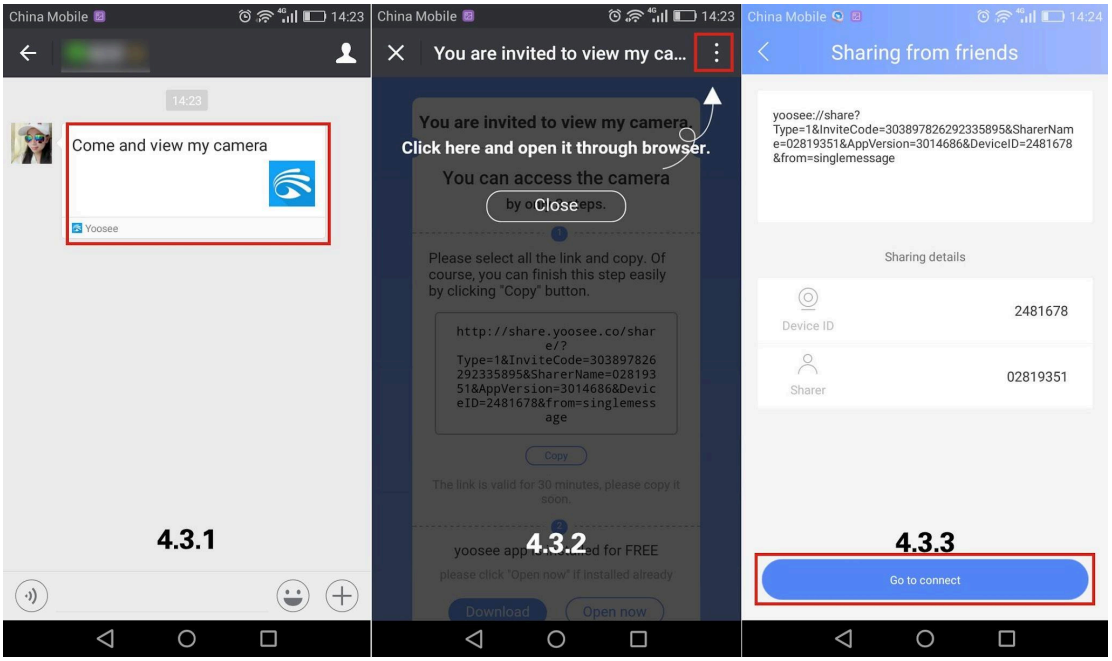

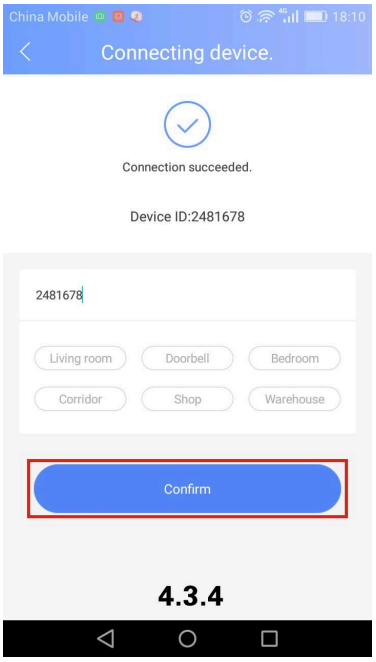


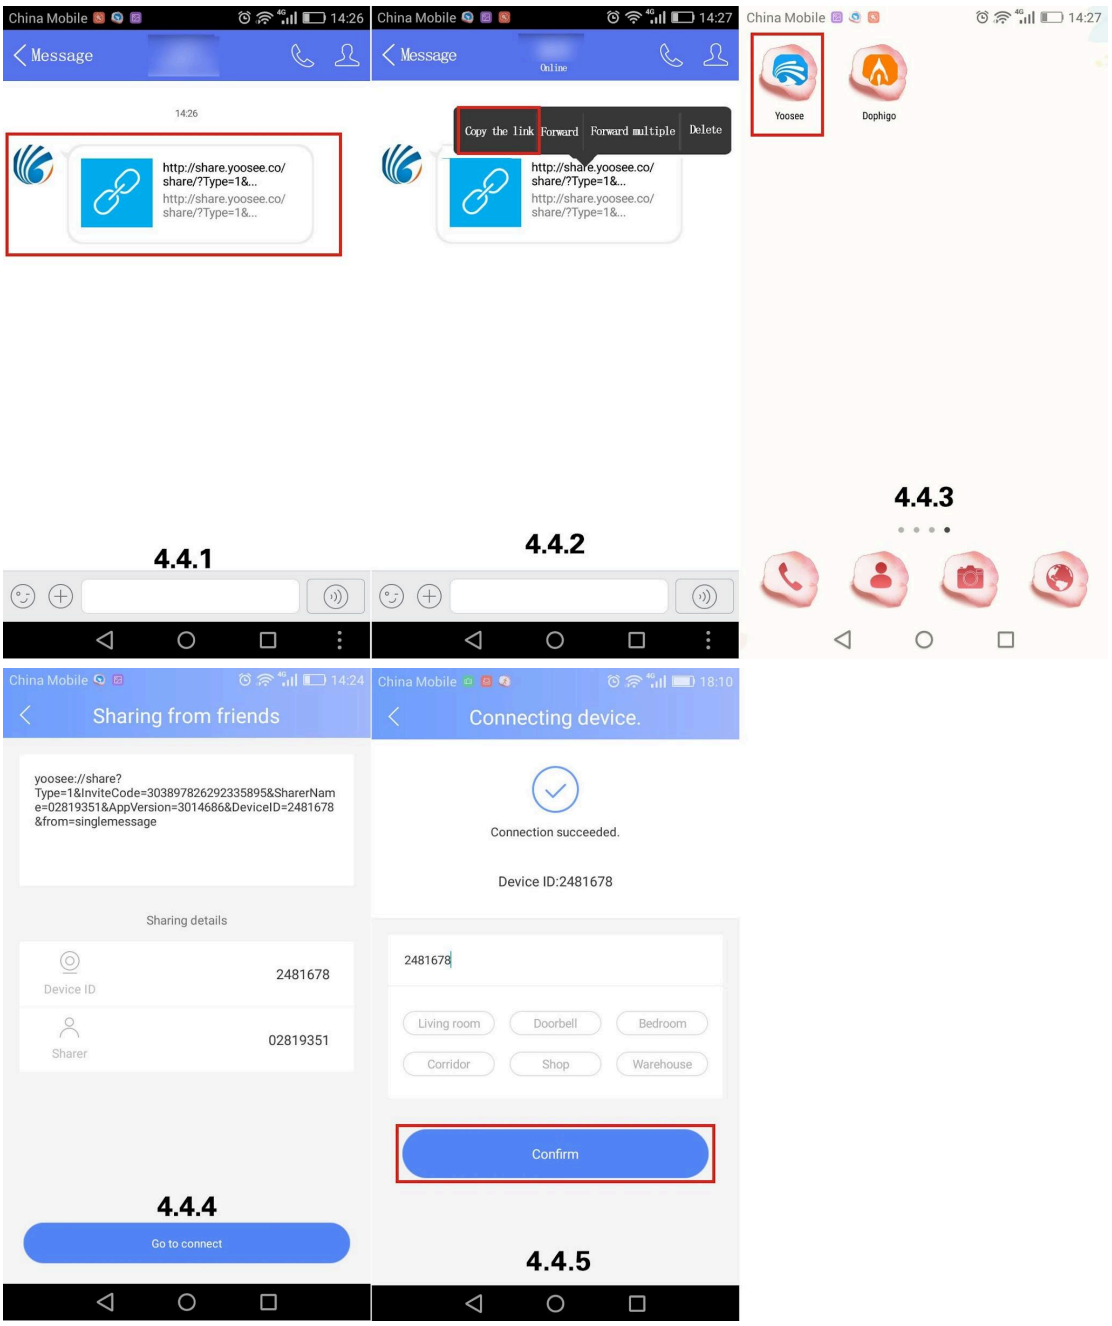

Or you can copy the sharing link and send it to your friends→copy the link manually→open APP→enter into the interface of adding sharing device(see pic 4.4.4), details are as follows:





Sharing Management

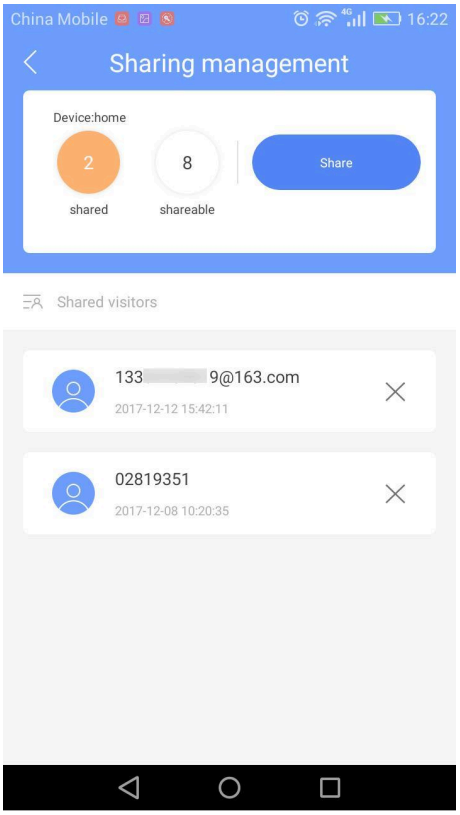The interface of “sharing management “will appear when clicking “sharing “button if this device has been shared to other people, you can delete the shared friends or share it again to other friends.Friends' e-mail address,phone numbers and APP ID can be shown as well.


China Mobile
16:22
Sharing management
Device:home
2
shared
8
shareable
Share
Shared visitors
133 9@163.com
2017-12-12 15:42:11
02819351
2017-12-08 10:20:35

## V. Introduction of function buttons

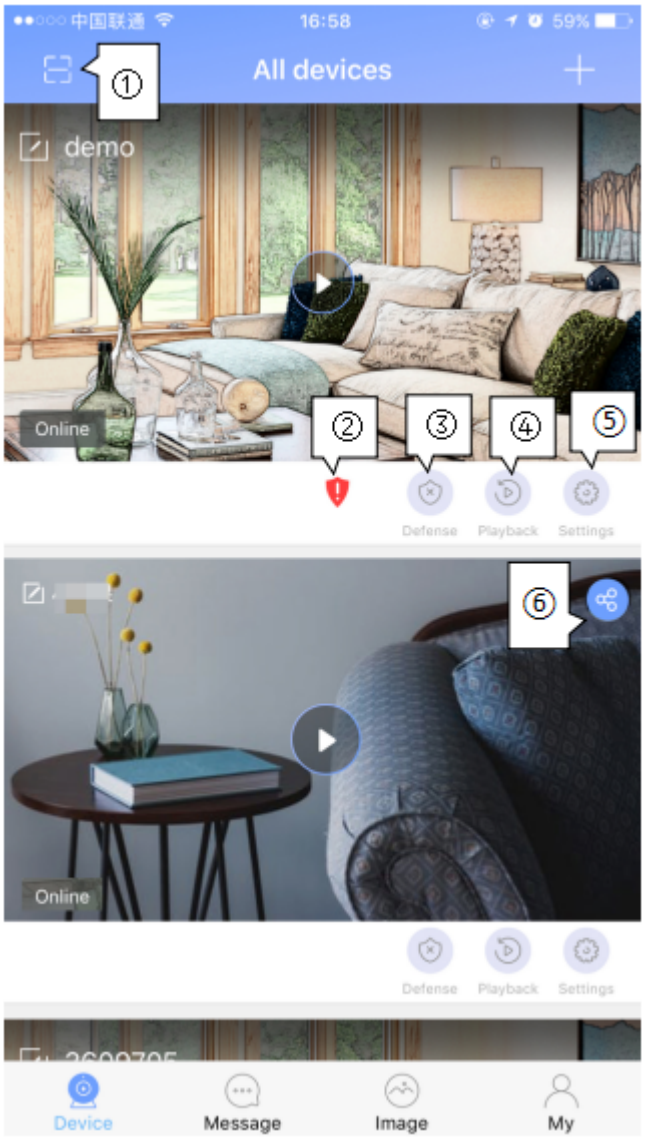


① **Scan**


② **Weak password icon**: Suggest to revise password when this icon is on.

③ **Defense succeeded & disarming succeeded** : Deploy must be switch on when using alarm notification and alarm recording.

④ **Video playback**

⑤ **Setting:** “Red spots “will be appeared on “settings ”&”firmware update” when there is new firmware version needed to be updated.

⑥ **Sharing**

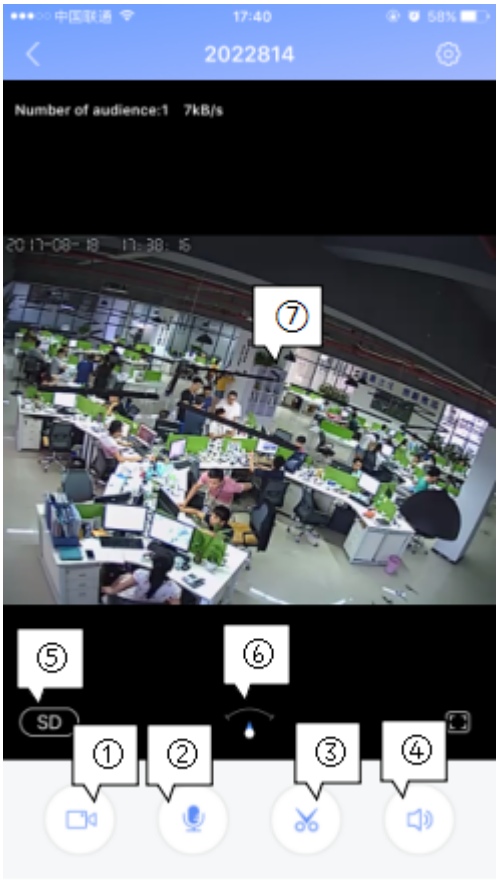


①**Remote recording**: Record videos and save it to phone.

②**Intercom system**: Press the button and you can talk remotely.

③**Remote capturing**: Capture video screenshot and save it to phone.


④**Volume**

⑤**Video Definition**


⑥**Direction indicator pointer:** Showing direction.

⑦**Monitoring area:** You can slide it up and down (left&right) to control the rotation in the monitoring area.

## VI. Settings

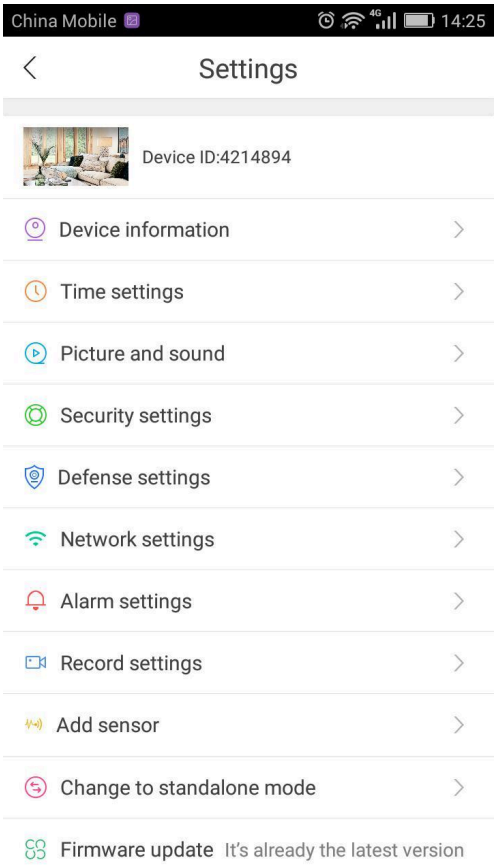


**Device information**: Information about device name, firmware version, LAN IP, Mac address can be checked, details please see below picture:

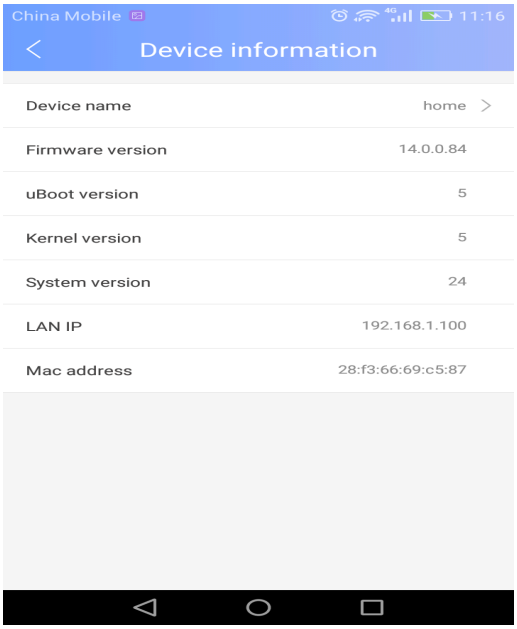


**Time settings**: Set device's time and time zone.


**Picture and sound**: set device video format、volume、video quality、motion detection

sensitivity、reverse image、indicator light and so on.

**Security settings**: RTSP password setting; set or change device administer password and visitor password. Visitor command will be shown for devices by sharing way.

**Defense settings** (this function needs device support): Set regular plan of deploying & revoking alarm

**Network settings**: Switch between wired & Wi-Fi connection or switch to other Wi-Fi.

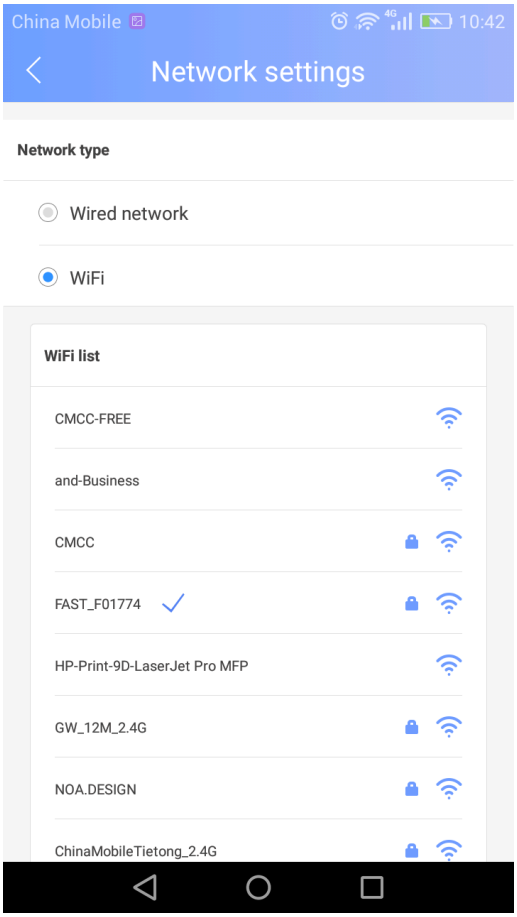



**Alarm settings**: receive alarm prompt、delete alarm pushing account、bound alarm pushing e-mail、buzzer、motion detection and sensitivity.

**Record settings**: Set record mode---record manually, record alarm, record timer.

Note: motion detection or sensor should be switched on as well as defense succeeded when using alarm notification and alarm recording.

**Add sensor** (this function needs device support): It's available to add ordinary sensor (door magnetic, PIR), remoter, special sensor (smoke detector, special gas detector).

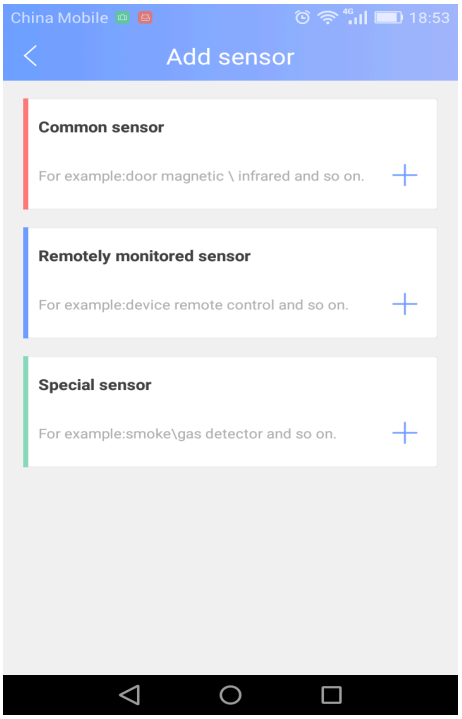



Adding methods :click"+" in add sensor interface→confirm→trigger sensor→add successfully.


Using case: switch on "receive alarm prompt" in alarm settings after add sensor successfully. And at the same time deploying alarm should be done. Once door magnetic is triggered after deploying alarm successfully, device will send alarm notifications to phone APP.

**Firmware update**: Update & optimize device firmware.


## VII.My

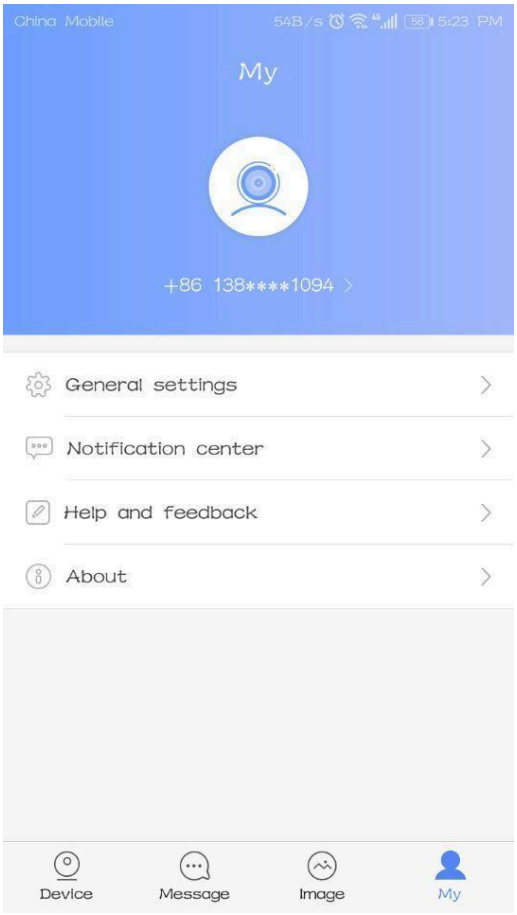


**Account information**: you can get account information about yoosee and modify your phone/email/login password, details please see below picture:

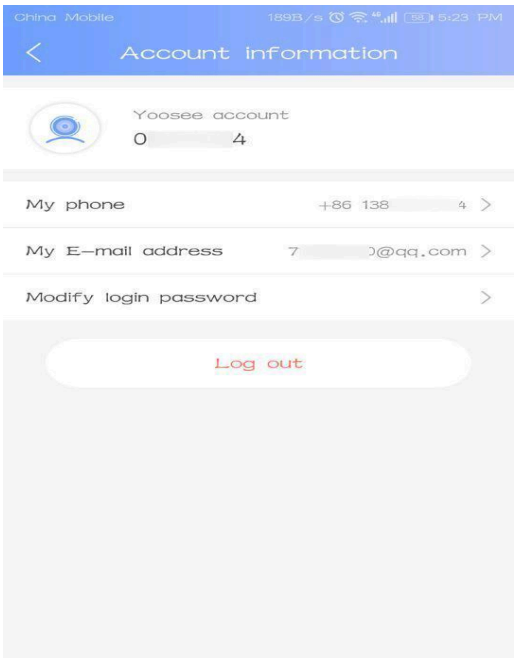


**General settings**: General functions can be set freely, details please see below picture:

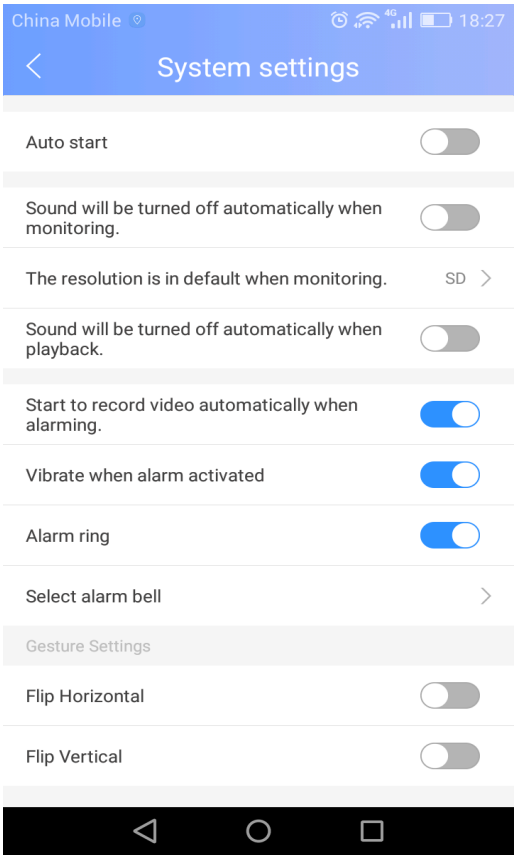


**Notification center**: Notifications sent by official yoosee and activity discount information can be acquired.

**Help and feedback**: Solve FAQs quickly or you can just give feedback to yoosee team.

**About**: : Information about Yoosee version, new functions, version updates can be acquired.

## VIII.FAQ

① Q: Notice wrong password when checking real time videos.

A: Device visiting password probably has been changed by other people but you can enter correct remote visiting password in the popup. If you forgot the password, you can press the "reset" button for a long time and restart.

② Q: It shows device is offline in device listing.

A: Please check whether camera is connected with network properly and network indicator light is always on or not.

Please check whether the router's network is fine or not.

③ Q: What shall we do if phone APP can't get any notifications?

A: Check whether alarm items & alarm notifications in alarm settings are switched on and make sure you have deployed alarm successfully. Also whether android backgrounder have been

prohibited or not by SafeMgr.

④ Q: What shall we do if motion detection gives misinformation?

A: Update device firmware (above 14.0.07.76) and APP (above 00.46.00.13) so that you can adjust motion detection sensitivity in APP settings or revise configuration files md_ level = 3(1~6, the smaller, the more sensitive)

⑤ Q: Recorded videos files can't be searched out on playback.

A: Please check whether SD card is damaged or not.

Please check the search time of recorded files and system time of camera.

⑥ Q: Camera can't connect with Wi-Fi.

A: Confirm the input password is correct.

Camera is not supported for 5G Wi-Fi, please connect with 2.4G Wi-Fi.

Some items restricted on Wi-Fi access such as AP isolation, Wi-Fi Zone and etc. should be closed.

⑦ Q: AP devices can't be found on Phone Wi-Fi list.

A: Firmware is not supported for this function.

The distance is too far from phone to device.

## IX. Acquire more information

This fast guidance will guide you to use your network camera in a very fast way. If you want to acquire more information, please download detailed user guidance or ask technical support from manufacturer.