

Cancel Admin Privilege for Different Devices

1.Standalone time attendance(TM1800/2800/4800....)

Press MENU--Input 24406083--Press OK--Input 87654312--Press OK. Then can enter menu-User Mgt- Clear all managers. **Don't press any other keys.**

2.TCP/IP time attendance

Solution 1: Press MENU--Input 24406083--Press OK--Input 87654312--Press OK. Then can enter menu--Advanced—Device--Manager Cancel. **Don't press any other keys.**


Solution 2: If the device is connected to the software, use software to clear admin

3.Fingerprint access control

Solution 1: Open the screws,remove the back bracket, device will alarm,

Press MENU--Input 24406083--Press OK--Input 87654312--Press OK. Then can enter menu--Advanced—Device--Manager Cancel. **Don't press any other keys.**

Note : For TFS28,there is no keyboard, when device is with power, short cut the two parts in the pic, devices will remind to clear the admin, press OK then can clear the admin

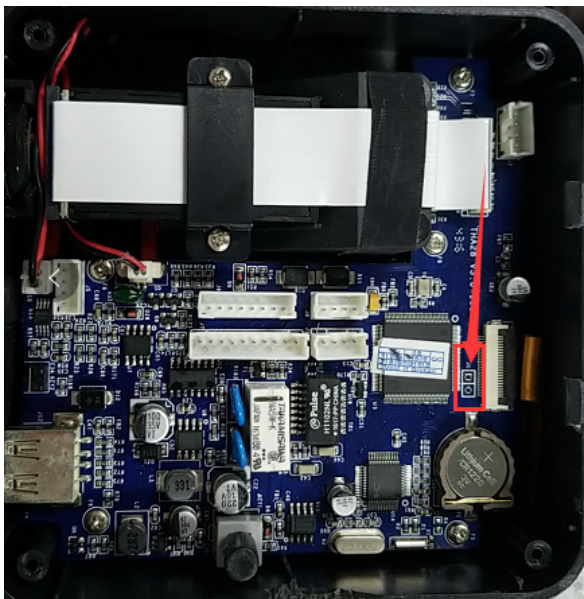


prompt box that reminds you to YES, press OK, then can clear the same solution)

Solution 2: If the device is connected to the software, use software to clear admin

4 .Face Attendance(TM610, TM620, TM630, TM650, TM6000)

Solution 1: There is one small hole near the USB connector, keep pressing it and restart the device until the screen appears a clear admin then loosen the hole, choose the admin(Standalone face devices are using

Solution 2: If the device is clear admin

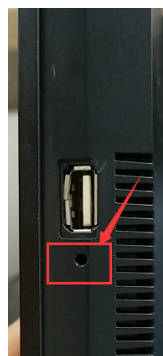

connected to the software, use software to

5 .Face access control(A1,

Solution 1: There is one black button near adapter connector on the back of the device, keep pressing it and restart the device until the screen appears a prompt box that reminds you to clear admin then loosen the hole, choose YES, press OK, then can clear admin

A2,850)



Solution 2: If the device is connected to the software, use software to clear admin

6. AI face device

Solution 1: press menu icon, device will prompt 'admin verify' then press password icon, device will display keyboard, **press ok--input 24406083--press ok then can enter menu-data mgt-clean manager**

Solution 2: If the device is connected to the software, use software to clear admin

7.TMF661 & TMF851

Solution 1: Press MENU--Input 24406083--Press OK--Input 87654312--Press OK. Then can enter menu--Data Mgt--Manager Cancel. **Don't press any other keys.**

Solution 2: If the device is connected to the software, use software to clear admin

8 .Dynamic face device(DF series)

Solution 1: press menu icon, device will prompt 'admin verify' then touch password icon, device will display keyboard, press 'ok' then input 123456789 or 24406083 then press 'ok' then can enter menu-user-user list and select user to change user privilege

Solution 2: If the device is connected to the software, use software to clear admin