
Mobile ALOHA 🏂: Learning Bimanual Mobile Manipulation with Low-Cost Whole-Body Teleoperation

Zipeng Fu* Tony Zhao* Chelsea Finn

* project co-leads Stanford University

https://mobile-aloha.github.io/

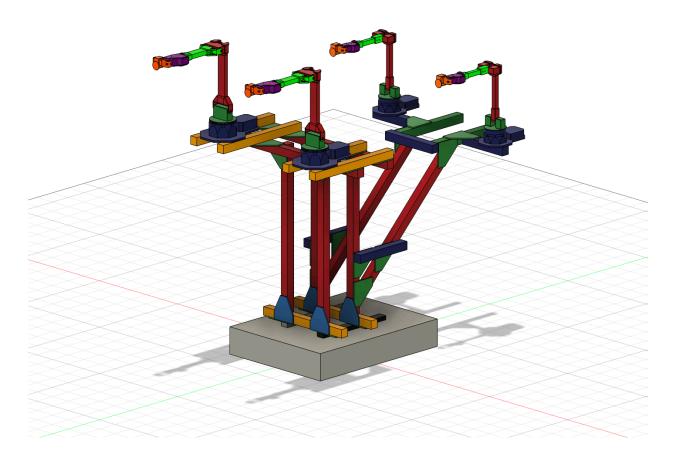

Our CAD: https://a360.co/47Wn6hp

The robot frame design is also available from Vention: <u>Link</u>. Credit: Robert Shuttleworth

Bill of Materials

Part Quantity Link Price (per u	
---------------------------------	--

Robots				
ViperX 300 Robot Arm 6DOF	2	https://www.trossenrobotics.com/viperx-3 00-robot-arm-6dof.aspx consisting of DYNAMIXEL XM540-W270-T actuators (7 units) DYNAMIXEL XM430-W350-T	\$6,129.95	
		actuators (2 units)		
WidowX 250 Robot Arm 6DOF	2	https://www.trossenrobotics.com/widowx- 250-robot-arm-6dof.aspx	\$3,549.95	
		consisting of <u>DYNAMIXEL XM430-W350-T</u> actuators (7 units) <u>DYNAMIXEL XL430-W250-T</u> actuators (2 units)		
Tracer AGV	1	https://www.trossenrobotics.com/agilex-tr acer-agv.aspx	\$6,999.95	
Onboard Compute				
Lambda Labs Tensorbook	1	https://lambdalabs.com/deep-learning/lap tops/tensorbook	\$2,399.00	
Robot Frame				
4040 800mm x 8	4	https://a.co/d/2DOkaGT (2 pcs)	\$42.29	
4040 500mm x 6	2	https://a.co/d/8mc69EV (4 pcs)	\$58.99	
4040 400mm x 2	2	https://a.co/d/9LNXjQg (1 pcs)	\$22.99	
4040 300mm x 7	2	https://a.co/d/6vgSVEO (4 pcs)	\$59.99	
4040 L-shape connectors x 28	5	https://a.co/d/ddY3mIX (6 pcs)	\$32.99	
4040 T-shape connectors x 4	1	https://a.co/d/fFDfjsg (6 pcs)	\$30.99	
4040 45-degree corner connectors	1	https://a.co/d/1wijAh3	\$21.99	
4040 Corner Bracket and T-Slot Sliding Nuts	2	https://a.co/d/fh7Gb8r	\$24.99	
4040 caps	2	https://a.co/d/fT3s9Xh	\$9.81	
M6 20mm (for mounting robot)	1	https://a.co/d/7f22g7c	\$9.99	

M6 T nuts for 4040 (for mounting robot)	2	https://a.co/d/aExH8IZ	\$14.16		
Camera setup					
Logitech C922x Pro Stream Webcam	4	https://a.co/d/hddyphF	\$98.35		
USB Hub	2	https://a.co/d/6oecHCf	\$19.99		
Power	Power				
Battery Pack	1	https://a.co/d/crLamne	\$699.00		
600W DC Supply	1	https://a.co/d/85xFKIC	\$59.00		
12V DC Cable	5	https://a.co/d/gHOeSD6	\$15.99		
Fork Spade Connectors	1	https://a.co/d/aVE8b55	\$13.69		
USB-A to Micro USB Cable	4	https://a.co/d/3Ndog7w	\$17.87		
Wheel Odometry					
DYNAMIXEL XL430-W250-T	2	https://www.robotis.us/dynamixel-xl430-w 250-t/	\$49.90		
U2D2	1	https://www.robotis.us/u2d2/	\$32.10		
U2D2 Power Hub Board Set	1	https://www.robotis.us/u2d2-power-hub-board-set/	\$19.00		
Jumper Wire	1	https://a.co/d/3iTVNTc	\$9.99		
Weights	1	https://a.co/d/6YiWAGv	se		
Misc					
Rubber Band	1	https://a.co/d/1lpVha6	\$9.99		
Gripping Tape	1	https://a.co/d/iuDVBf4	\$54.14		
Common equipments					
Allen keys					
Hot glue gun					

Total	\$31,757.86

3D Printed Parts

For leader and follower end-effectors, follow the original ALOHA tutorial:

ALOHA

Tutorial For wheel odometry, below are the required parts (6 pieces in total):



Link to STL/STEP/Fusion360 Files

Hardware Guide


1. Install ALOHA end-effectors

Follow Part 1 of ALOHA Tutorial to install end-effectors for both leaders and follower robots. Also install wrist cameras for both follower robots.

2. Build the robot frame

Follow the CAD files: https://a360.co/47Wn6hp

Select "Model Browser" to see the component list	Click on a component to highlight it
--	--------------------------------------

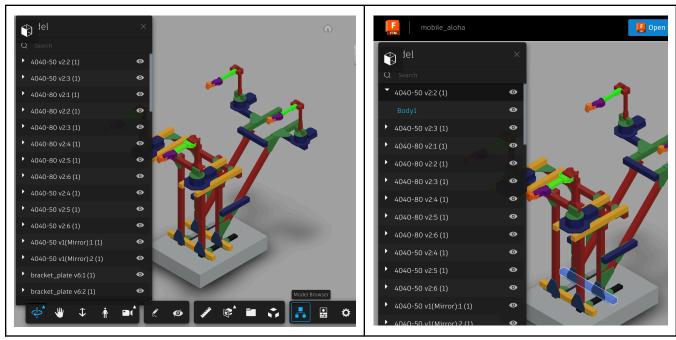

4040-50 means a 50cm beam

3. Mount the robots and the cameras

Unlike the rest of the frame which has M8 screws, the robot needs to be mounted with M6 (see *M6 20mm*, *M6 T nuts for 4040* in the BOM.)

Mounting of the leader arm (left)

Mounting of the follower arm (left)




Secure the robot to the frame with 6x M6 screws. The front of the robot base plate should align with the extrusion bars.



The robot is mounted to the frame with 2x M6.

To mount the front camera, we tape the base of the logitech webcam on top of the beam, then use the hot glue to fix the camera angle.

The beam to use

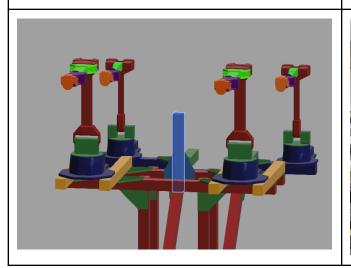

Ours



Example camera views (front, left, right)



Optional: Gravity compensation for the leader arms.

The original ALOHA's gravity comp is too cumbersome for mobile applications. Below is our redesign (partially inspired by <u>GELLO</u>):

Shoulder joint

We use 4x M2.5 20mm screws and wrap rubber bands around it.


Note: the screws might bend overtime due to the stress.

Elbow joint



Similarly with the elbow joint.

Wrist

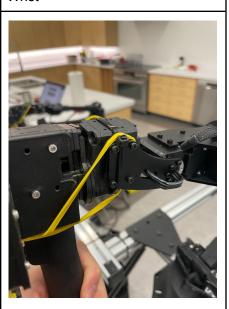

We also added a rubber band to the wrist joint to restore it back to home position.

This is important to prevent this joint from flipping 180 degrees.

4. Cable connections

4.1 Power

Place the battery pack on top of the bottom beams:



To power the ALOHA arms, please refer to 🖪 ALOHA 😩 Tutorial, then plug the power supply directly into the battery pack.

Also, plug in the laptop power supply to the battery pack directly.

4.2 USB connections

To connect the Tracer Base to the laptop, use the USB-CAN bus converter that comes with the base.

We use two USB hubs for this setup:

- 1. 4 USBs from each robot arm, 1 USB for the Tracer Base, 1 front camera
- 2. 2 wrist cameras

These two USB hubs are then plugged into the laptop on the left and right sides respectively.

At this point, you should be able to teleoperate both arms! Go to the *mobile-aloha* repo to complete the software setup, then try out *one_side_teleop.py*!

5. Wheel Odometry

The wheel odometry is used to collect base velocity information during teleoperated data collection. We cannot use the readings from Tracer wheels directly, because when powered on the wheels are automatically torqued on. Thus unless AgileX (manufacturer of Tracer) updates their software to support pure reading mode from their motors, we need to turn off the base and use this odometry unit for data.



We need to install the unit on both sides of the base. For each side, we need:

1x DYNAMIXEL XL430-W250-T

1x Wheel, 1x Mount, 1x Housing (see Mobile ALOHA 🏂 Tutorial)

Since we use the Dynamixels purely for reading base velocity (just as an encoder but not the motor), the friction of the gear could result in slipping between the ground. To reduce that, we disconnect the shaft from the DC motor inside the Dynamixel.

1. Take out the horn following Dynamixel X-Series Horn Disassembly or brute force.

- 2. Open up the Dynamixel case following
 - □ [Do It Yourself] DYNAMIXEL Gear Replacement AX-Series till 0:41. The motor we used is different from the one shown, but similar in structure.
- 3. Take out the gear closest to the motor shaft, then put everything back.

To further reduce slipping between the wheels and the ground, we use gripping tape to wrap around the wheels, and add weight on top of the housing.

To connect the motors to the laptop:

- 1. Connect both motors to the *U2D2 Power Hub Board Set* with the cable that comes with the motor and the jumper wires.
- 2. Connect the U2D2 Power Hub Board Set to the U2D2
- 3. Connect U2D2 to laptop with USB directly
- 4. Add another **12V DC Cable** to the 12V power supply and plug that into the *U2D2 Power Hub Board Set*

Lastly, setup both motors following the tutorial in Mobile ALOHA repo.

You are now ready to use the Mobile ALOHA 🏂!