




350z Gauge Pod Quick Install Guide

1. Remove Center Console and unplug wiring harness.

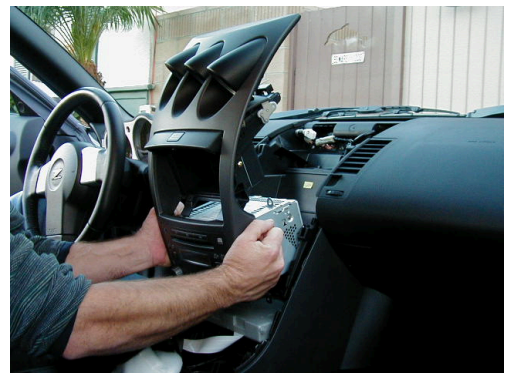

2. Remove the Factory Gauges using a Phillips Screwdriver.



3. Then remove the two Gold screws that hold the trim hood of the console on.
 - a. *Keep the screws as you will be using them to install the Gauge pod*




4. Carefully remove the ends with Heavy Duty Scissors or equal tool. Then remove the Ring around the Hooded piece.

NOTE: Be careful not to rip the Top hood piece off (Plastic Welded), but in some cases it is already loose and will need to be reglued.

5. When Finished these are the Pieces that should be removed and cut in a series.



6. Now test fit the gauge into the pod. And you may or may not need to dremel or us backing plate the comes with your aftermarket gauge. Most gauges slide in snug.
7. The using the Gold screws and washers included install the gauge pod.
- a. *You will see that when the screws are not fully tight this will give you the adjustability to center the gauge.*
 - b. *You can also adjust where you want the gauges sit Depth wise. By adjusting the Gauge fully out or Pushed all the way back.*
8. ***Finished Product should look like this:***

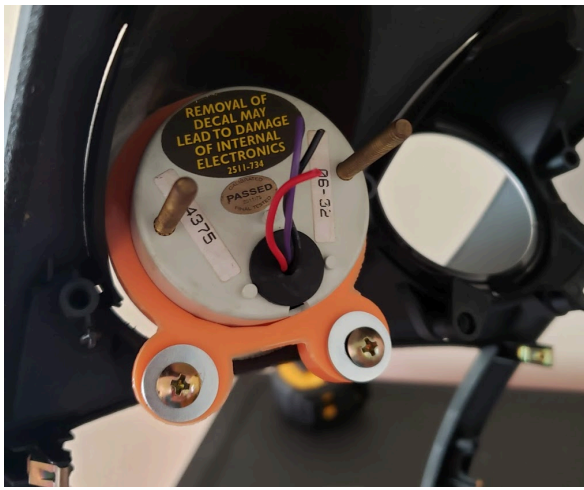

Thank you for trusting Alliance Racing your automotive performance needs!

Specializing in → 350Z

G35

370Z

G37

Q50

GTR

Check us out online →

TheAllianceRacing.com

(check out our vendors and brands page to see all the brands we sell)



@TheAllianceRacing



facebook.com/theallianceracing

JOIN THE ALLIANCE