

Assembly Guide Iris 46



Summary :

Generator of Holograms	2
Rolling Casters installation	4
Screen installation	5
Glass installation	7
Start the Iris 46	9
Content editing	9
Nano-router	9
Tablet (option)	11

Generator of holograms

Frontal view of an assembled product




The material you will need to assemble it :

- A hex key set
- A wrench



Main pieces :

- 1) Steel/aluminum structure
- 2) Screen of 46"
- 3) Mirrored glass

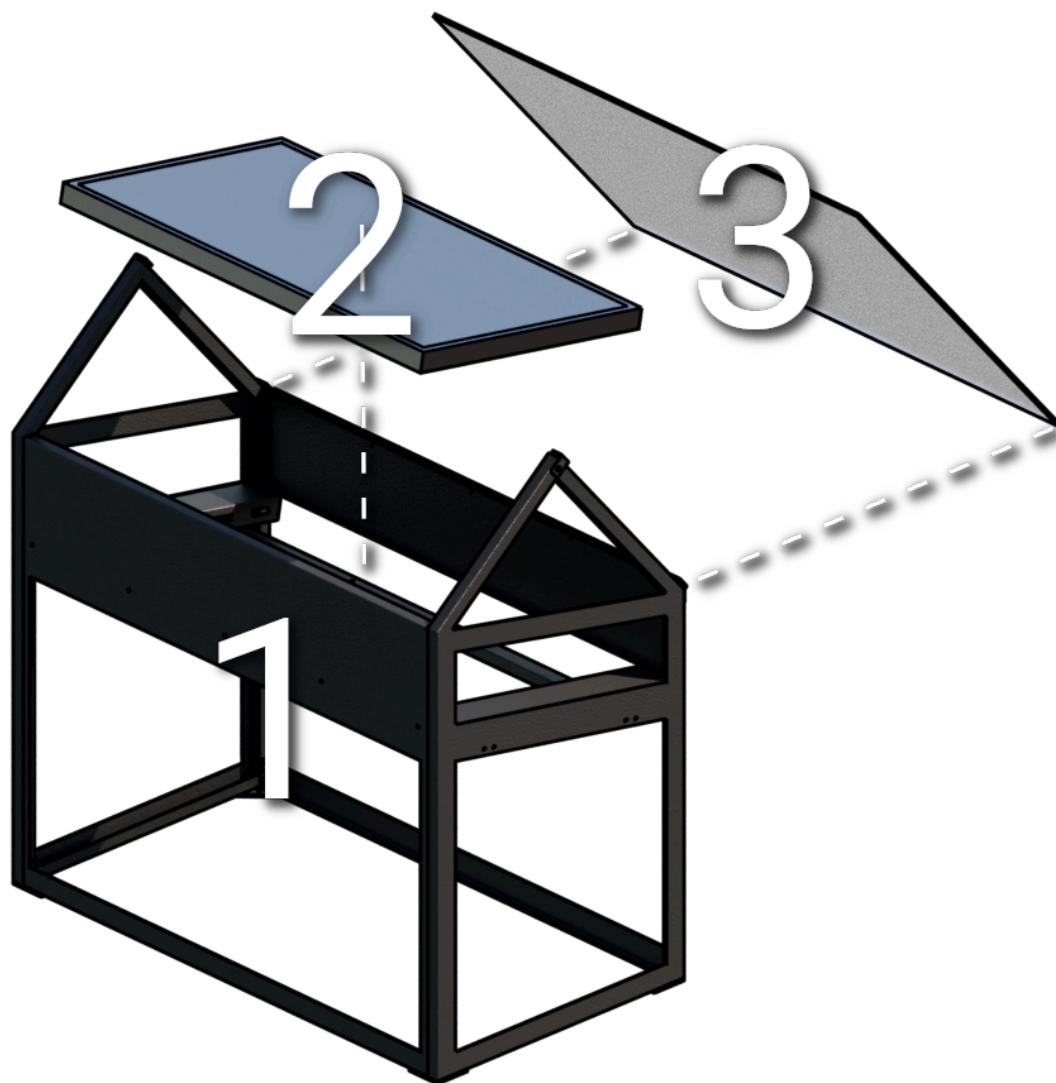

Rolling Casters Installation



Turn the structure upside down to have access to the 4 locations of the rolling casters.

Fasten them with the bolts and nuts supplied. The BTR key is used to fix the bolt.

Turn the structure back up.




Screen Installation

Take the screen out of its packaging and place it horizontally with the screen facing the ceiling on its placement inside the structure. The screen must be placed correctly in the center of the structure.

To place it down, start with the screen in a vertical position as indicated, and then lift it up, tilt it and place it horizontally.

Be very careful to first place the bottom part of the screen (the side with the LG logo on it) within the structure to block it in its place , otherwise ...

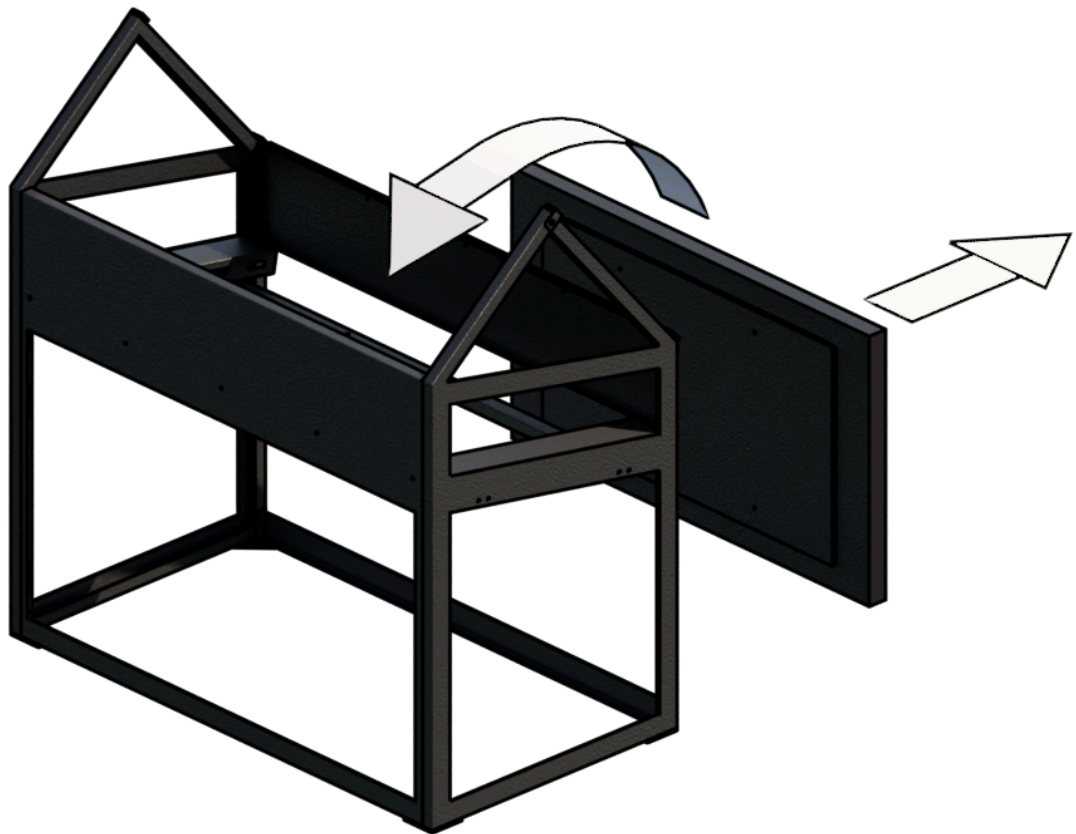

Underneath, 4 screws go through the holes in the horizontal bars to hold the screen in place.


Place the last metal covers on the right and left side of the screen.




Glass Installation

The direction of the glass is very important. Only one side is metallic and gives a clear image.

We can find the right side by placing one finger on it. The right side gives a clear reflection that sticks to the finger nail, the wrong side gives a blurry and distant reflection.

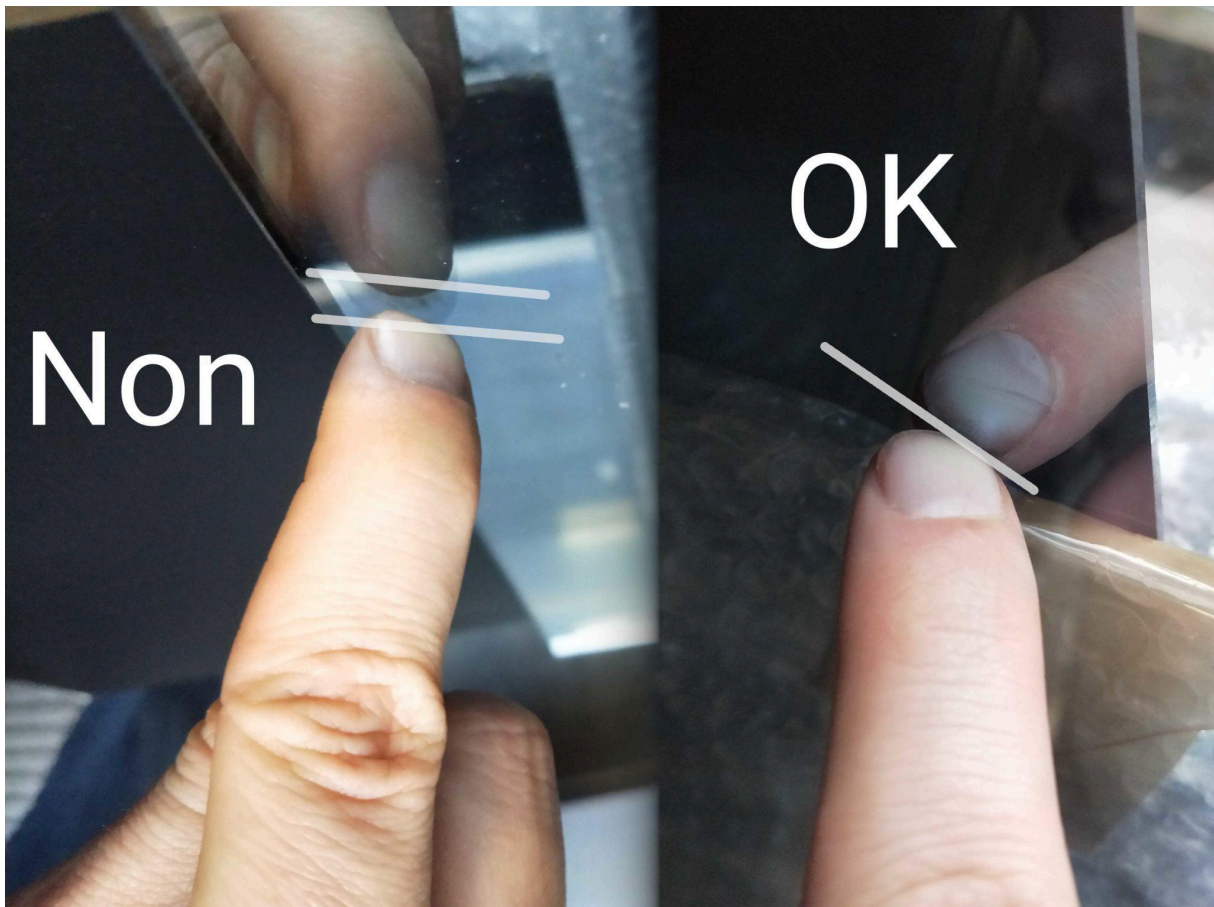

Place the non metallic side towards the outside, then carry it and place it on the structure like the image below shows.

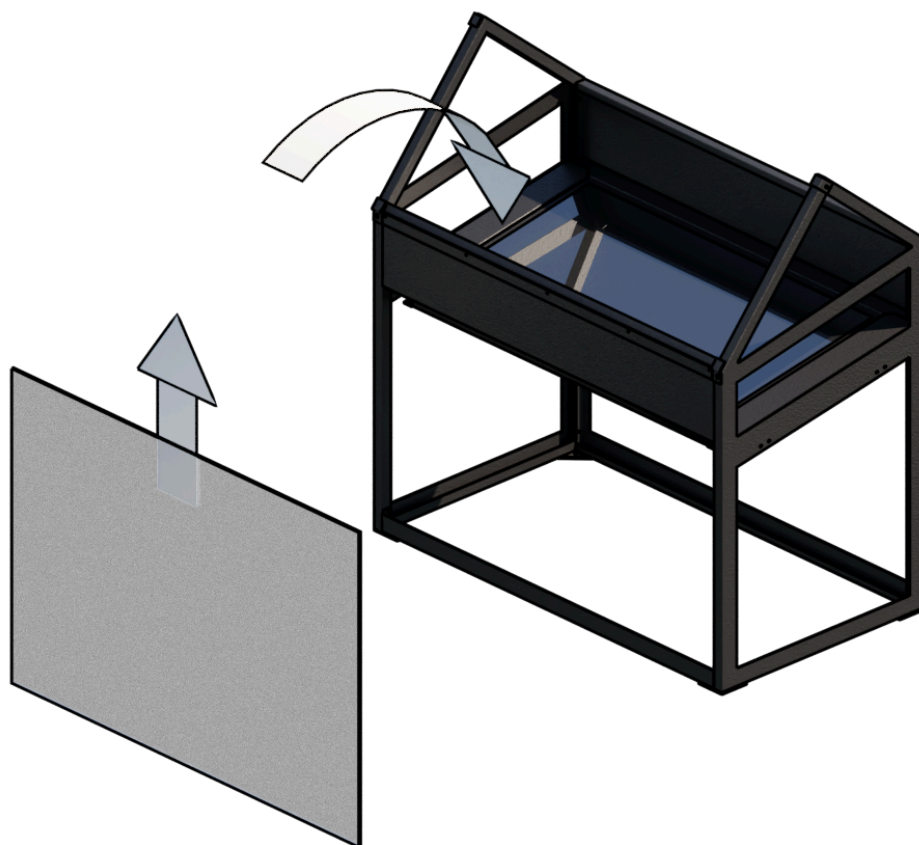

Adjust the glass, then secure the glass with the 2 fasteners provided by screwing them.





The pieces are placed on top of the uprights, on the sides.

Start the Iris 46

The PC given is fastened under one of the hidden spaces under the screen.

Plug in both the screen and the PC to the electrical socket.

Connect the screen to the PC in the HDMI port.

Start the PC and the hologram will appear.






Content Editing

Nano-router

Connect the Nano-router to a USB port and to the RJ45 port of the product.

On the iPad, connect yourself to the network TP-Link-XXXX. The network should be pre-recorded.

In case of a new configuration, the password is the number sequence placed to the right of "Wireless Password/PIN" under the router.

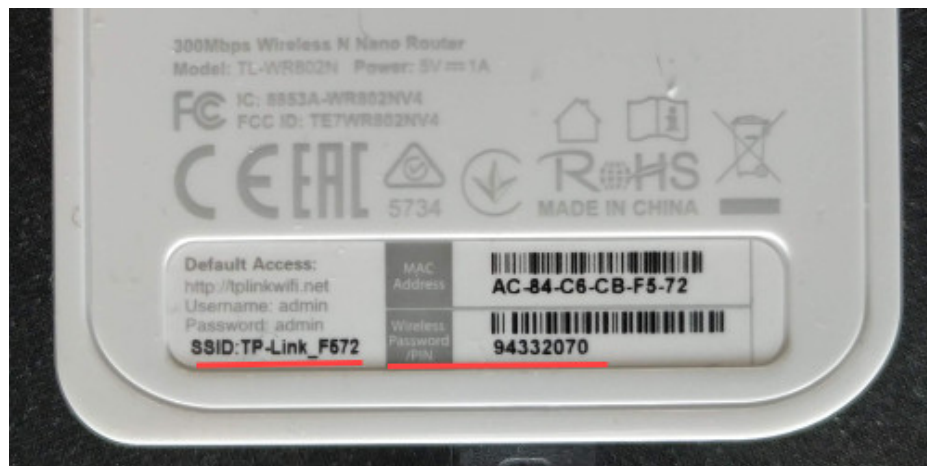

This illustration is an example and it doesn't match your router.


The WIFI connection will be generally noted as **limited**. This means that you are connected to the product, but not to the internet. This is normal.

Administration : 192.168.0.1 to access the administration menu of the router and get the IP of the holographic terminal in Clients DHCP.

The mini router will give an IP to the hologram **192.168.0.100 à 192.168.0.110**

Connect from a computer (a laptop or a mobile phone) and access the IP of the product.



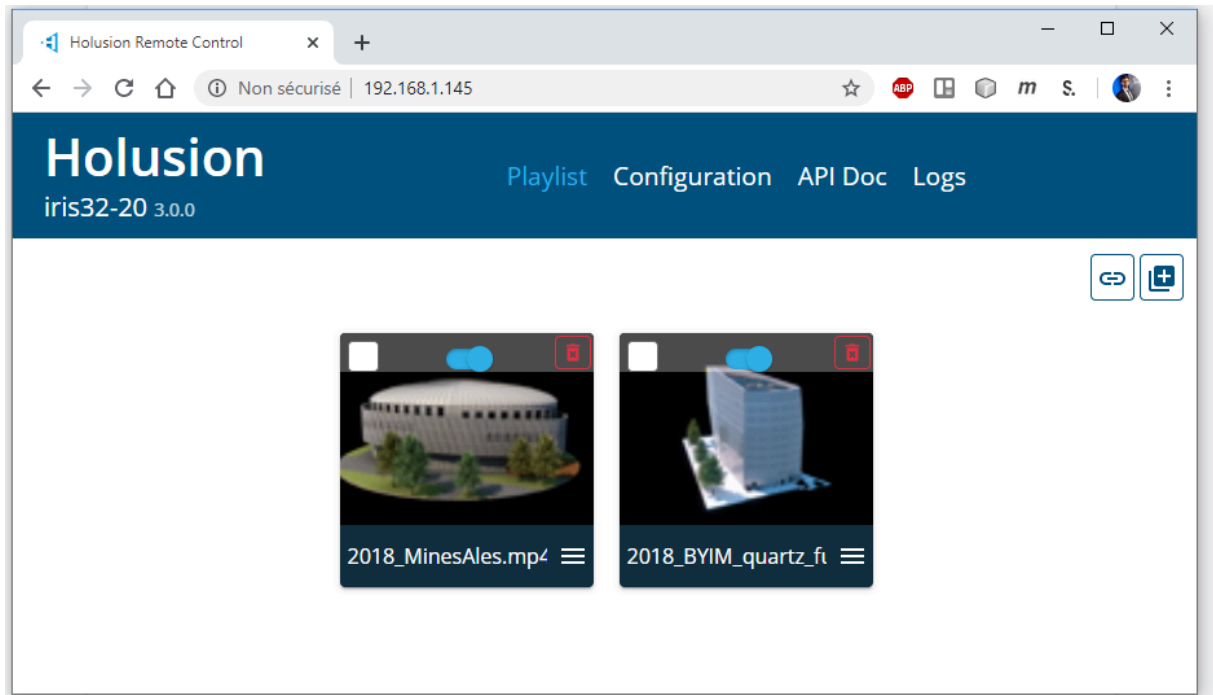

You can now activate and deactivate the videos. As well as adding them and deleting them.

If you can't access the IP of your product:

- Start by verifying that you are properly connected to the TP-Link network. *It may happen that the computer changes the network automatically.*
- Verify that your router is correctly placed in the "access point". To do this, connect to the network and type in a browser *192.168.0.1* . Connect with the help of the password *holusion2014*. In the tab "Operation mode", verify that the case is ticked : Access point. If this is not the case, tick it, wait for the router to restart and then restart the product.
- If these solutions don't work, please contact the client service.

Tablet (option)

It is possible to modify the videos on the Iris 46 from different devices and in different ways. These manipulations must be done only in case of an update to the videos. A modification interface online allows access.

Unlock code of the tablet: **052014**



Connect to internet (4G or local WIFI)

Open the app "content.holusion.com"

Click on the Wifi signal on the top right area.

Click on "Update local files" to change the contents on your device. The app and the tablet are now updated.

Connect now on to the nano-router and come back to the app.

Click on the product displayed on the list of products to start the update of the videos in the hologram.

During normal operation, videos remain stored in products from start to start.

Don't hesitate to contact our technical support (9h-17h) :

Sebastien DUMETZ

s.dumetz@holusion.com

06.73.80.44.59

connection ssh :

ssh user@[IP of the product]

login : user

password : user

switch to superuser : su

password superuser : holobox

access to API :

on a browser : [IP of the product]/doc

We hope that you will be pleased with the Iris 46. Please, don't hesitate to contact us for any questions or suggestions.

