


S928-X K Other settings


The Zidoo S928X-K product other settings include function options such as Language, HDMI CEC, Power mode, HDD sleep, Fan Control (except Z9X 8K), Front display panel, Keyboards, Date and time, Show hourly time, Main interface weather, Upgrade, Recovery and reset, About, etc.

I. Language

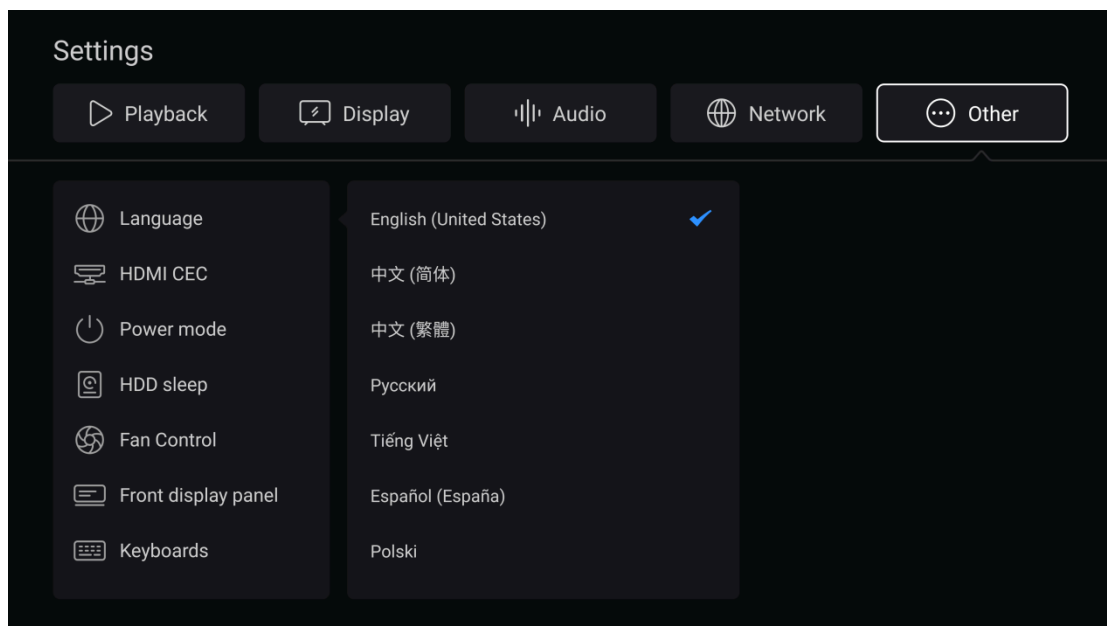

This option switches the player system language.

II. HDMI CEC

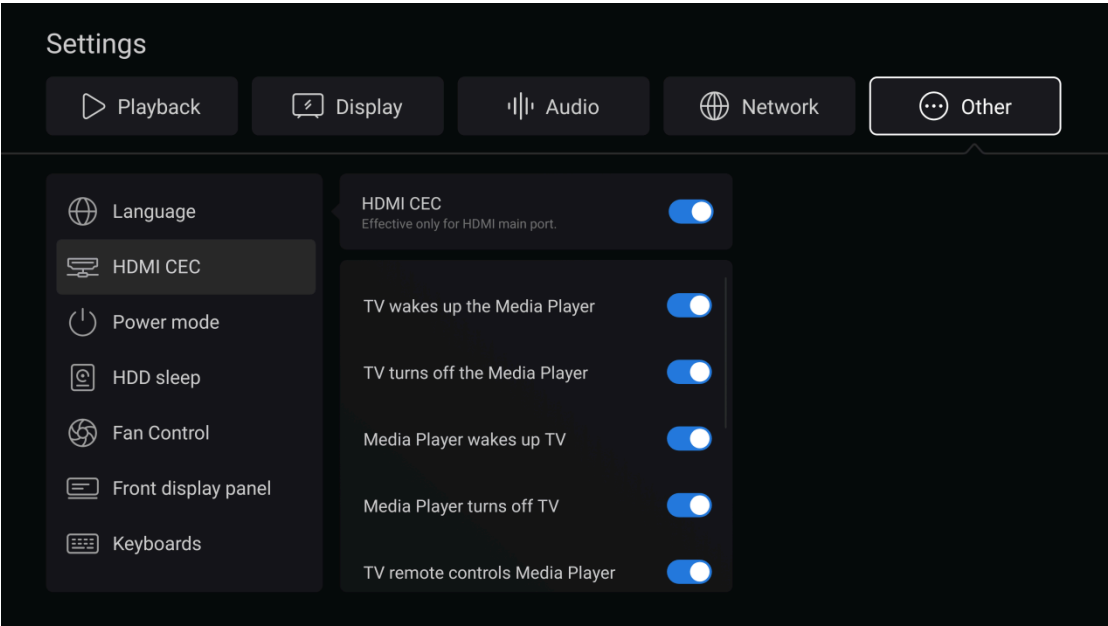

CEC, (Consumer Electronics Control), CEC control is a means of control conduction through HDMI. CEC function brings many conveniences to the user, it allows the end user to control multiple CEC-enabled devices with a single remote control. Thus eliminating to use multiple remotes to control electronic devices such as: Televisions (TVs), set-top boxes, etc.

HDMI CEC	Function Introduction
TV wakes up the Media Player	-
TV turns off the Media Player	-
Media Player wakes up TV	-
Media Player turns off TV	-
TV remote controls Media Player	The TV remote control's up, down, left, right, navigation buttons, OK button, menu button, and back button can control the player.
Media Player controls TV volume	When HDMI audio is set up for source pass-through, the Zidoo remote volume


	buttons control TV volume
Media Player controls AVR volume	When HDMI audio is set up for source pass-through, the Zidoo remote volume buttons control the volume of the amplifier or sound wall.
One Touch Play of Home key	When the TV has some source inputs at the same time and the TV is not currently on the Zidoo source, press the Zidoo remote home button and the TV will automatically switch to the Zidoo source.
Inactive source turns off Media Player	When the TV has some source inputs at the same time and the TV is currently on the Zidoo source, the TV switches to other sources will turn off the player automatically.

Note:

*(UHD8000, Z3000 PRO) HDMI CEC is effective only for HDMI main port.


*When HDMI is the source output, this function will send the local speaker control signal to the amplifier or TV and other devices through the CEC, when using this function, please make sure that the other devices have turned on the CEC. This function may cause compatibility problems, not all the devices can be controlled.

III. Power mode

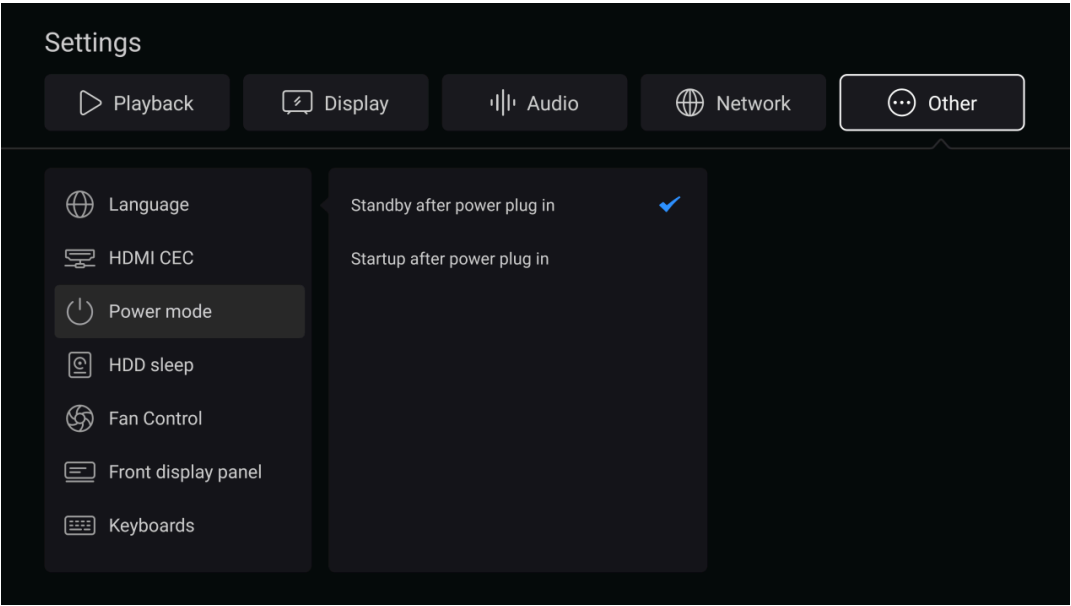

Power mode	Function Introduction
Standby after power plug in	The player is in standby mode after powering up and requires the remote control to press the power button to turn on.
Startup after power plug in	The player powers up and turns on directly


IV. HDD sleep

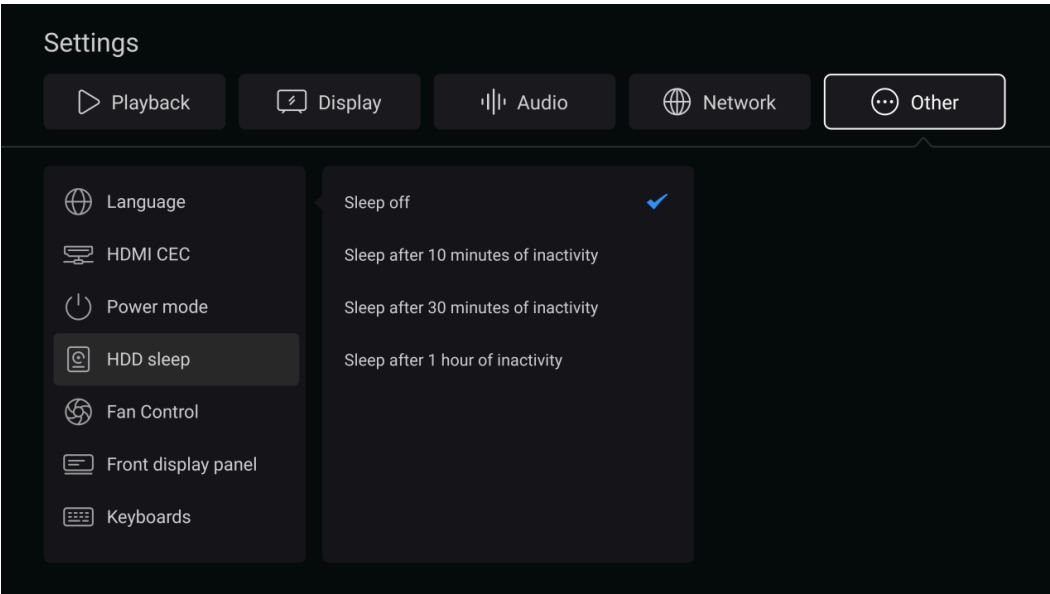

The system provides three sleep time slots for users to choose. The player will keep working after mounting the hard disk. By turning on the hard disk sleep function, it can effectively extend the life of the hard disk.

Note: When connecting a hard disk using the SATA port, hard disk sleep simply disconnects the player from the hard disk read/write connection, but the hard disk still spins.


V. Fan Control (except Z9X 8K)

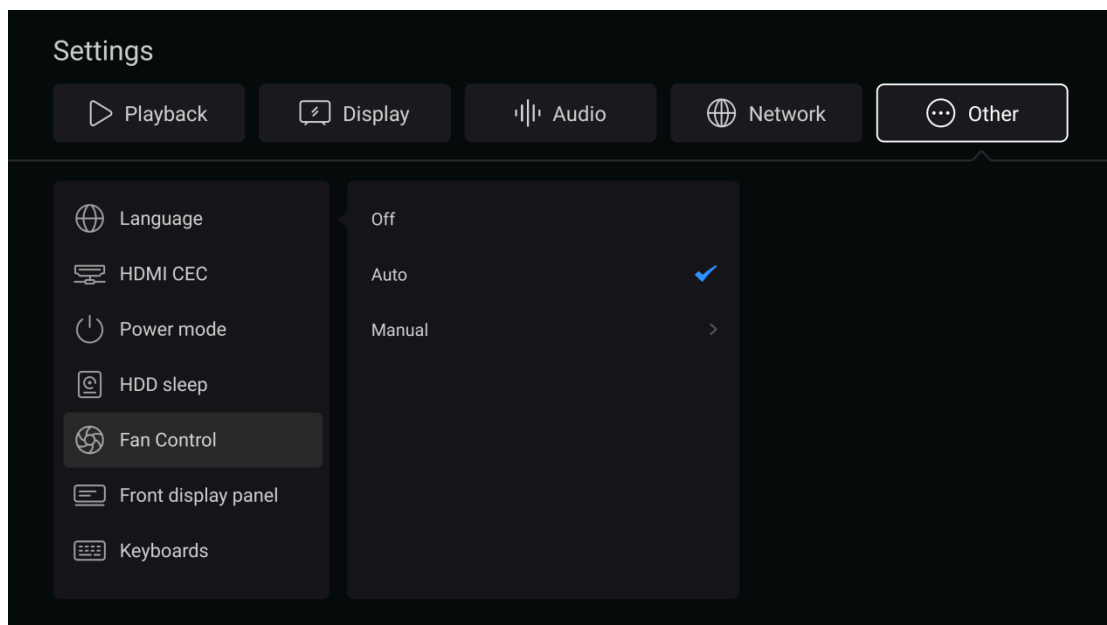

This option allows to set the built-in cooling fan on/off and adjust the speed range.

Fan Control	Function Introduction
Off	Turn off the fan.
Auto	The system automatically sets the fan speed according to the hardware temperature (default)
Manual	Manual settings of fan speed, low, medium and high speed adjustable in three steps


VI. Front display panel

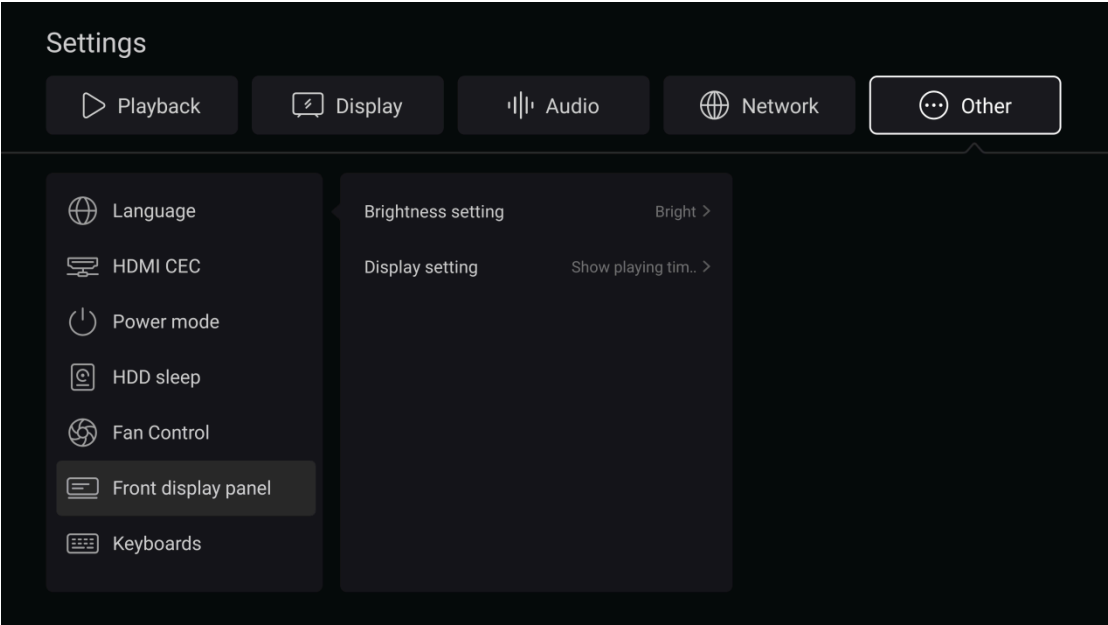

Some users want to achieve the perfect theater effect when watching a movie, it is important to minimize the "light pollution". This option allows to make display setting, front panel brightness setting or off.


Front display panel	Function Introduction
Brightness setting	Off: Close the front display panel Bright (default) / Dimmed: Brightness adjustable in two steps
Display setting	Show playing time (default) Show remaining time Show clock

VII. Keyboards

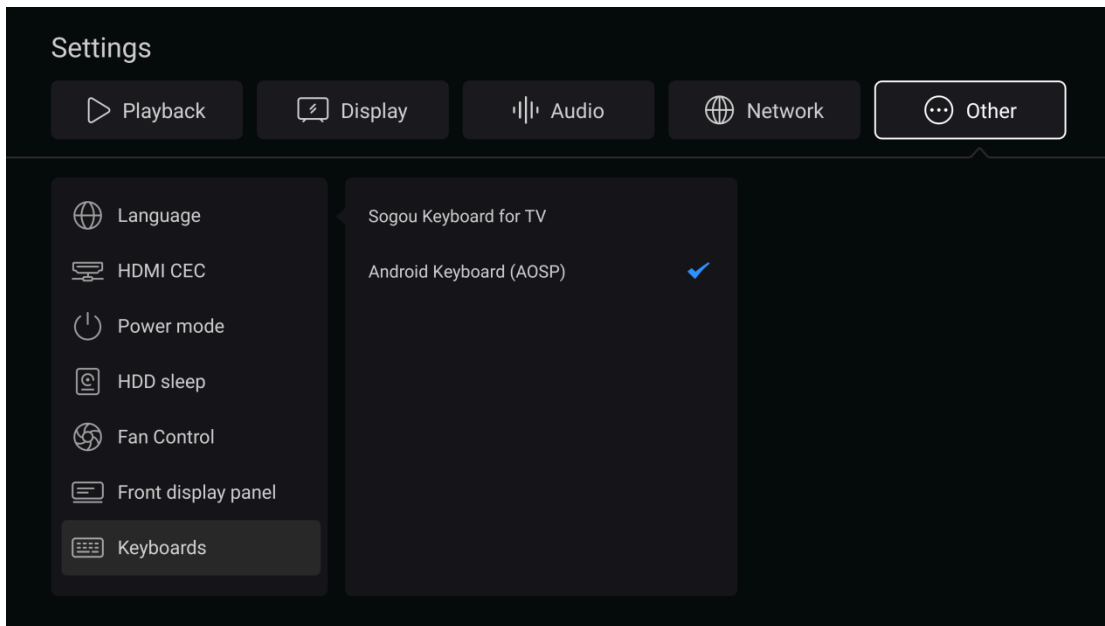


Toggle the system Keyboards option, this firmware directly built-in Sogou Keyboard for TV, users do not need to manually install through the tedious operation.

VIII. Date and time

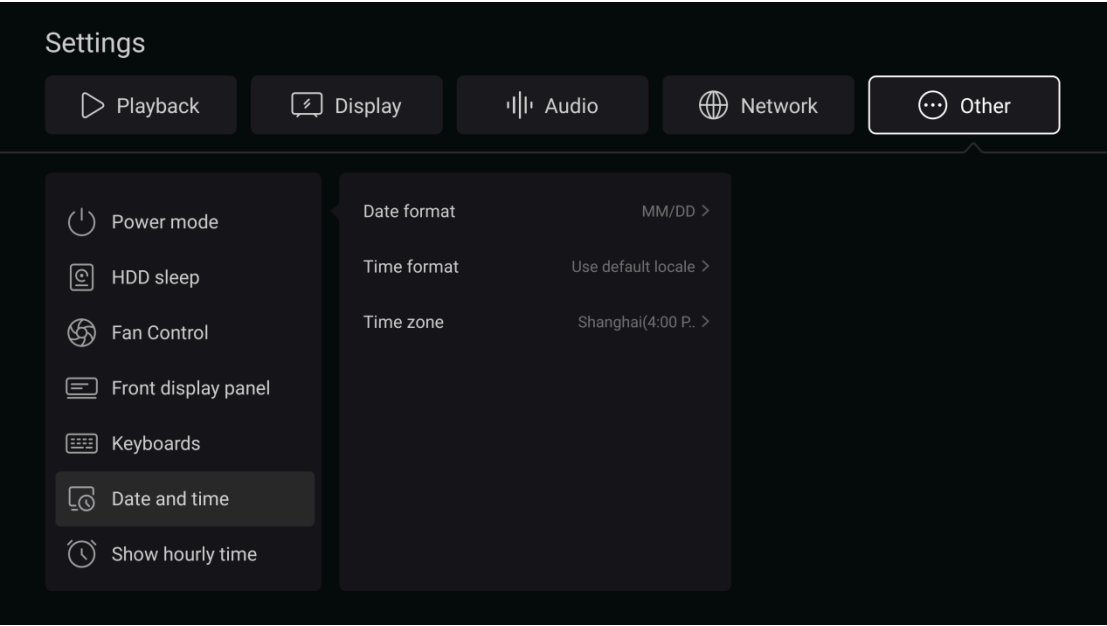


Date and time	Function Introduction
Date format	MM/DD, DD/MM
Time format	Use default locale (default) 12-hour format 24-hour format
Time zone	Hawaii-Aleutian Standard Time Multinational time, etc.

IX. Show hourly time

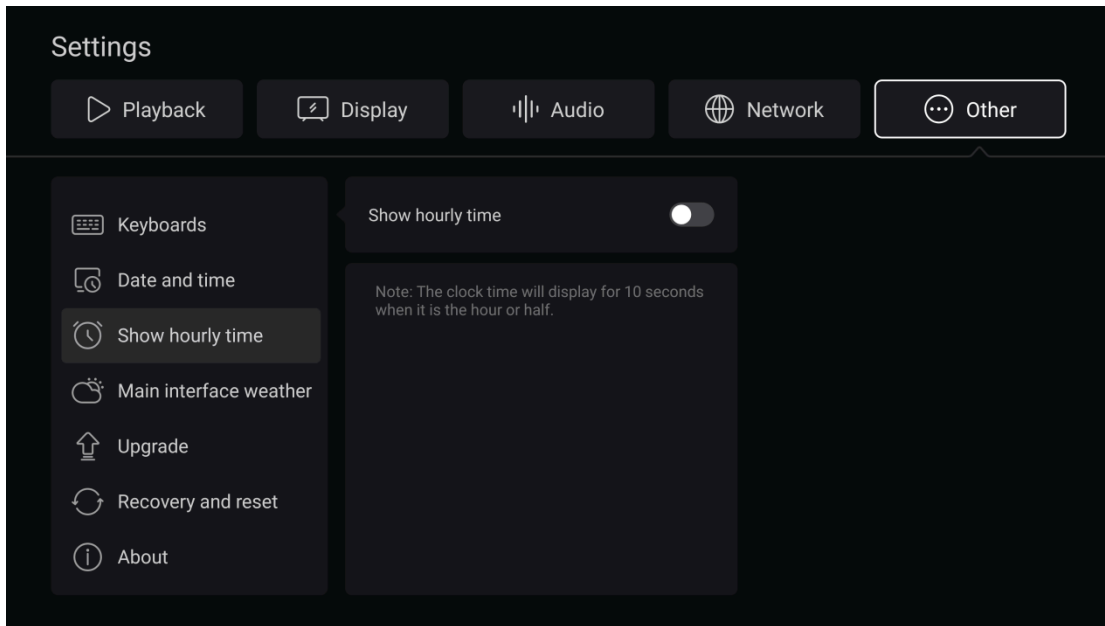


When this function is enabled, the player will display the clock time in the upper right corner for 10 seconds when it is the hour or half in the UI interface and playing audio and video.

X. Main interface weather

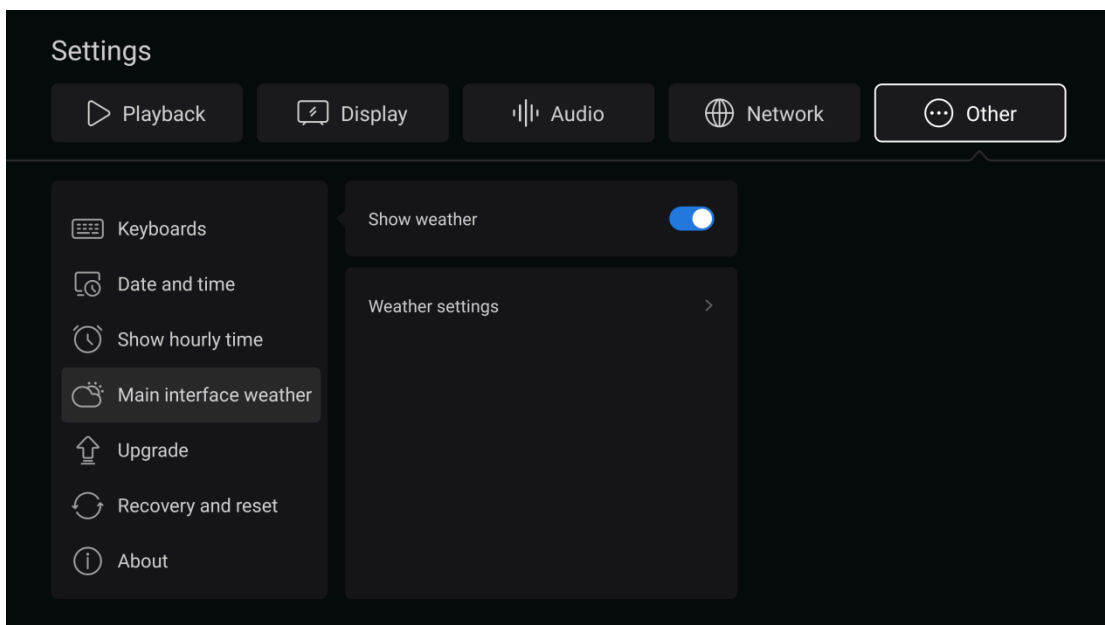


Player main interface show and hide weather switch and customize display city weather settings.

XI. Upgrade

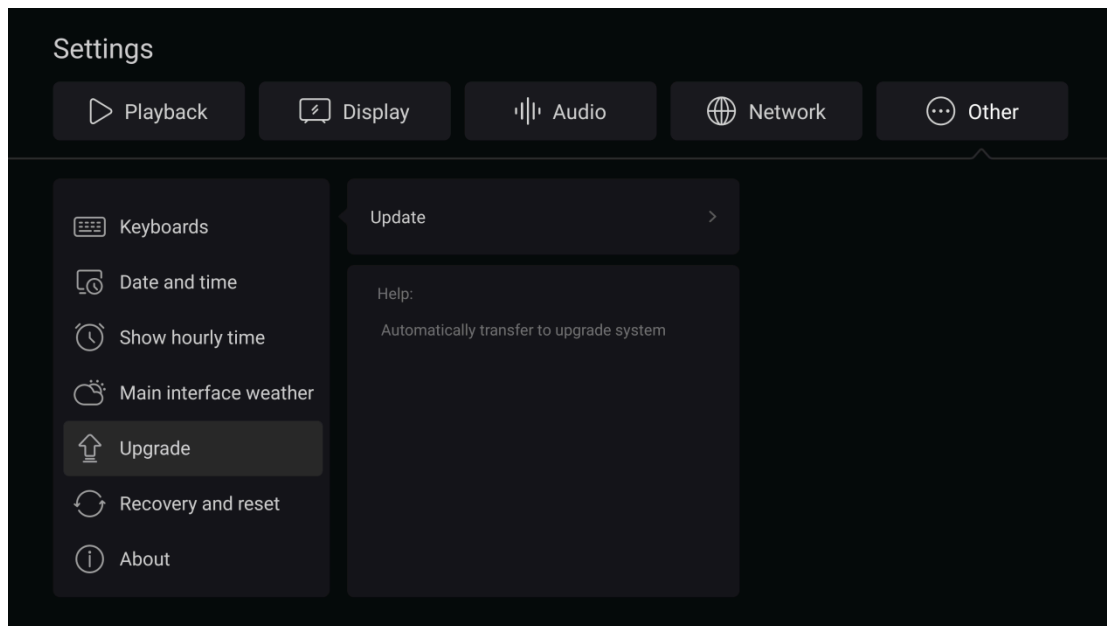

OTA online, local upgrade system, the official will update the firmware from time to time, and the system will automatically detect the latest system version. You can also search manually through this option. If there is the latest system, you will receive a prompt to update and experience the latest features in real time.


XII. Recovery and reset

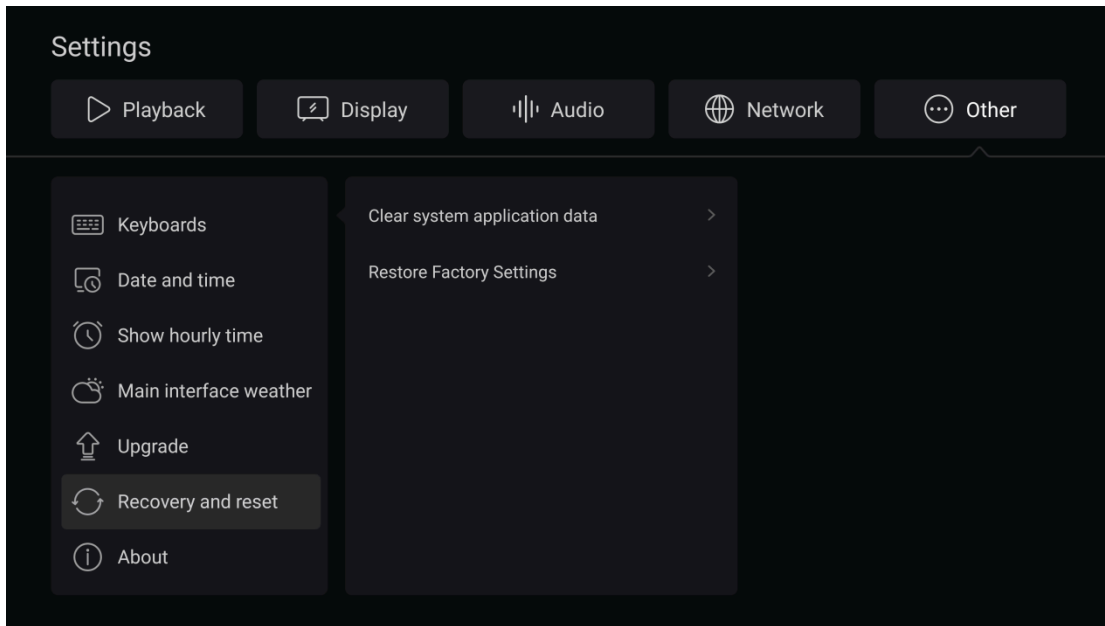

This function is to clear system application data and restore Factory Settings.

Recovery and reset	Function Introduction
Clear system application data	This operation will clear all system application data, including: Poster Wall, Music Player, File Manager, Picture Manager, Local Player, Control Center, etc.
Restore Factory Settings	This operation will erase all data in the internal storage device of your box.

XIII. About

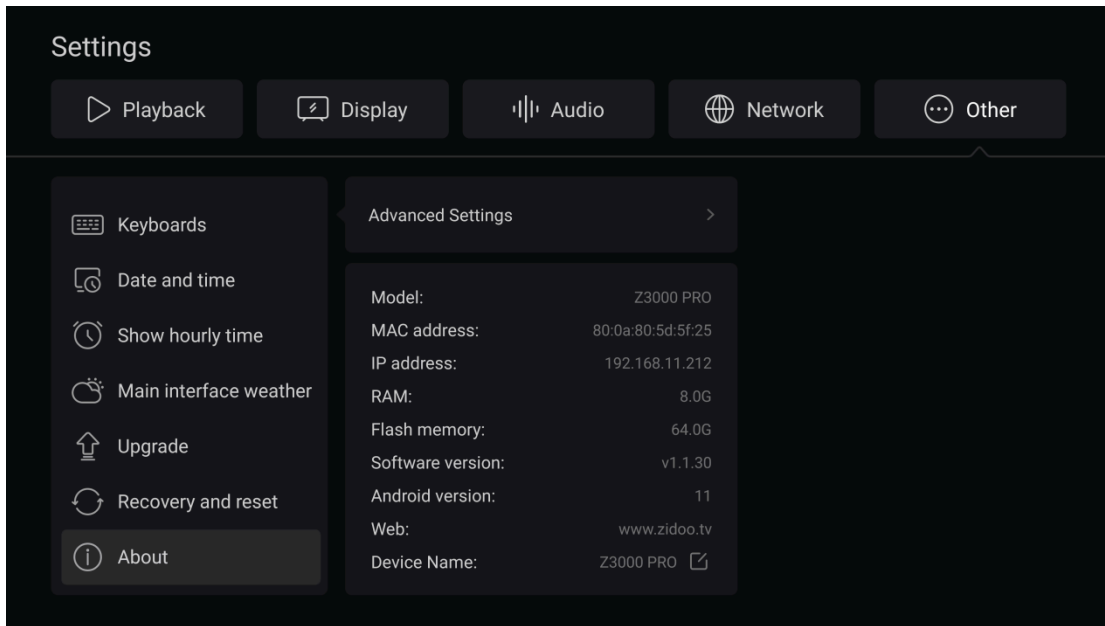

Overview of the player model parameters, with access to the Zidoo Advanced Settings option on the right side.

Advanced Settings	Function Introduction
Network & Internet	Wi-Fi, Ethernet, AP, IP settings, etc
Apps	App settings such as Clear data, Disable, Permissions, Security & Restrictions, etc
Device Preferences	System Date & Time, Language, Keyboard, display and sound, Accessibility and Restart, etc.
Remotes & accessories	Bluetooth device connection, disconnection and advanced device settings

ZIDOO will update the firmware from time to time, therefore, the operating instructions in this tutorial will be updated too, there may be a slight discrepancy with the actual use of the product, please refer to the actual situation.