


# Zidoo Boot Wizard

Zidoo RTD1619DR models have included HDR10+ and Dolby Vision VS10 engine, settings are more complex than former models. So that a new boot wizard is available, let's see what the new Boot Wizard looks like.


## 1. Select Language

When the first time to turn on Zidoo media players, we will see the page below to select language initially. Choose language according to your preference by UP and DOWN keys on remote control.

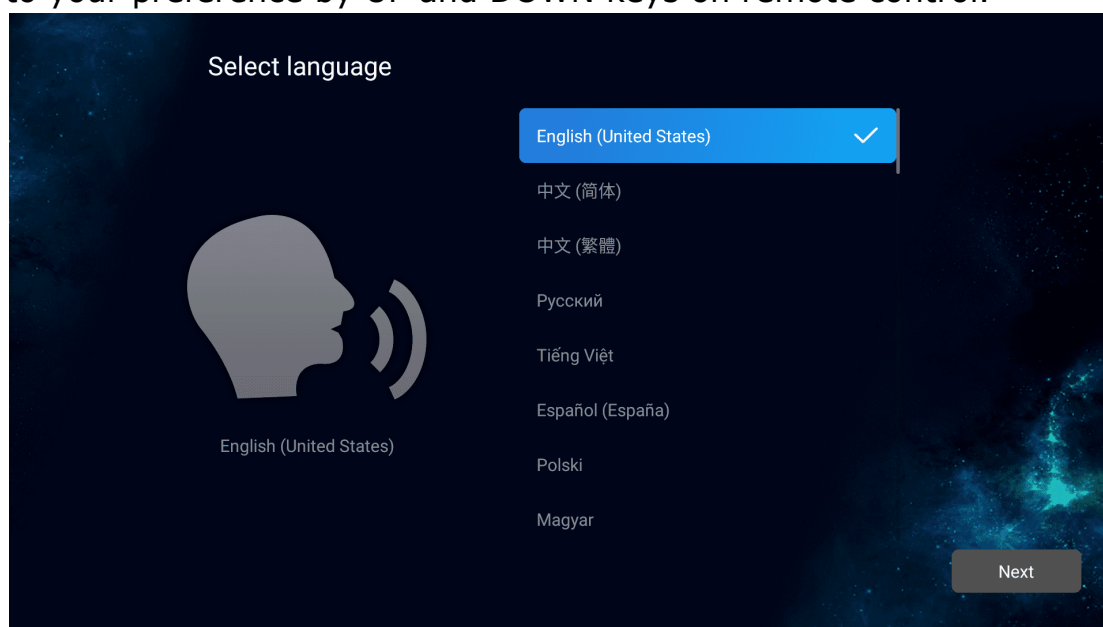


## 2. Screen Zoom

Press UP and DOWN keys on the remote control to adjust the display area.

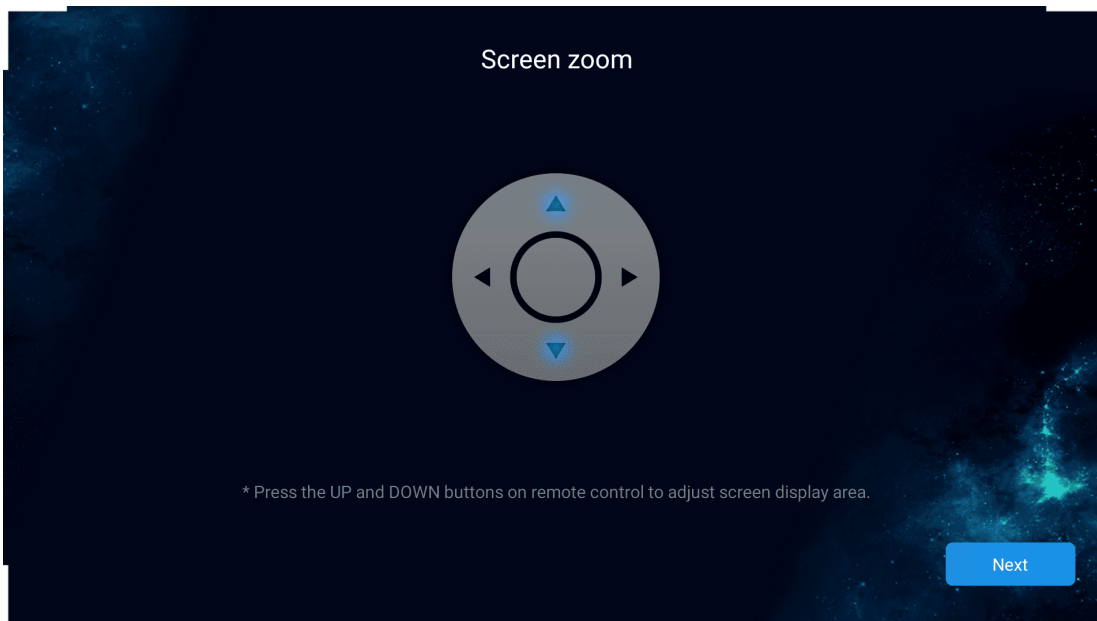


### 3. Time Zone Setting

Choose the time zone according to your location.

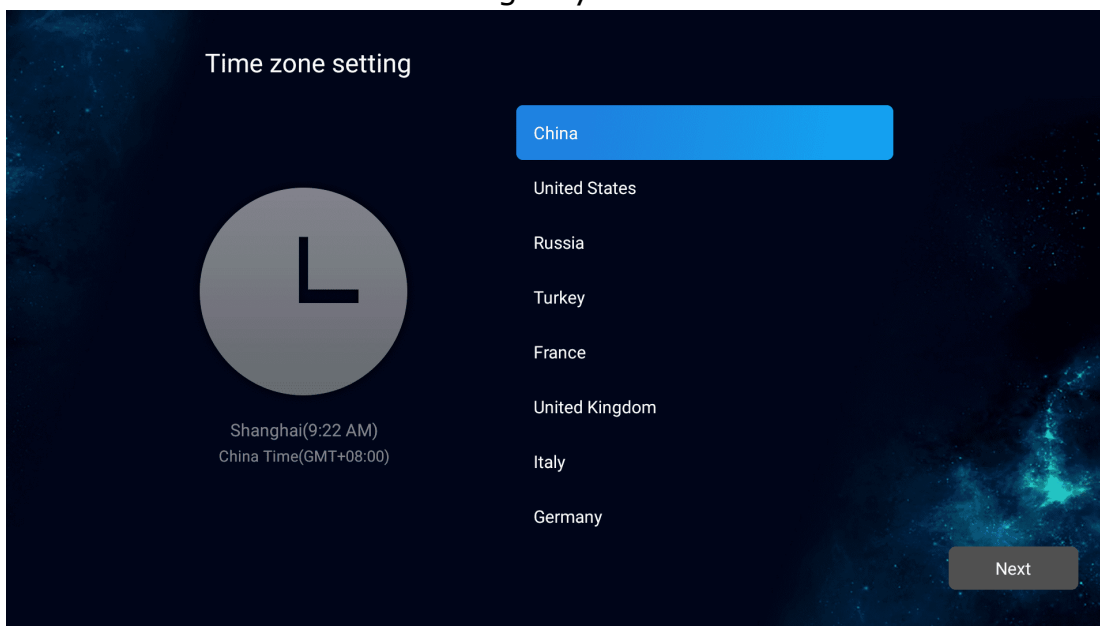

### 4. Network Connection


Ethernet and WiFi are both supported by Zidoo media players. If cable is connected before powering on, Zidoo media players will connect to Ethernet automatically. WiFi SSID will be connected by inputting a password.

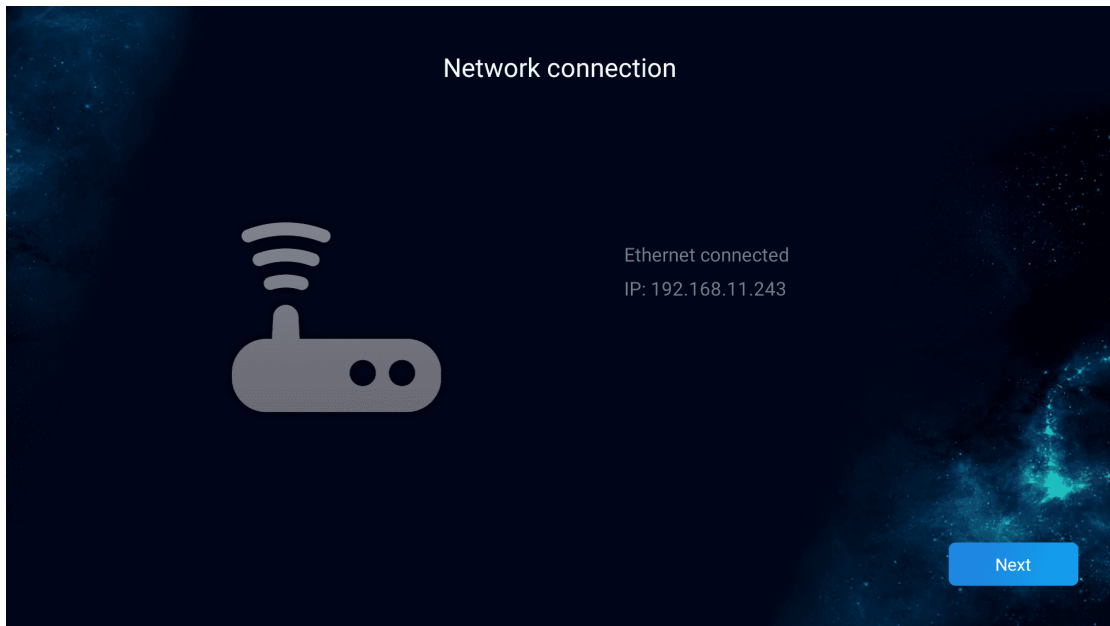

## 5. Select Output Mode

### 5.1 The Wizard Mode

5.1.1 The Wizard mode is suitable for new Zidoo users, output mode can be set easily by simple steps.

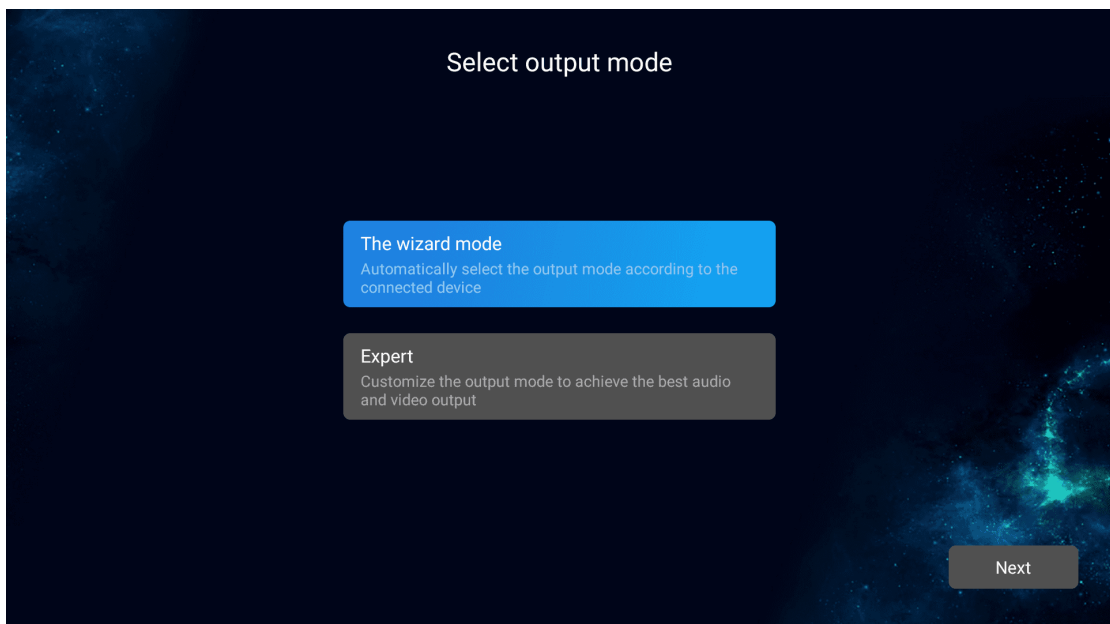

5.1.2 Connect respective options according to your device connections.

## The wizard mode

Please select the device connection method:

### Directly connected TV

The audio is decoded directly for output



HDMI connects to a 1.4 AV receiver, which is then connected to the TV

AV receiver output up to 5.1 channels

HDMI connects to a 2.0 AV receiver, which is then connected to the TV

AV receiver supports 7.1 channels and above

HDMI connected to a TV while OPTICAL or COAXIAL connected to an AV receiver

Output up to 5.1 channels



Next

Tip: You can also modify it by settings.

## The wizard mode

Please select the device connection method:

### Directly connected TV

The audio is decoded directly for output



HDMI connects to a 1.4 AV receiver, which is then connected to the TV

AV receiver output up to 5.1 channels

HDMI connects to a 2.0 AV receiver, which is then connected to the TV

AV receiver supports 7.1 channels and above



HDMI connected to a TV while OPTICAL or COAXIAL connected to an AV receiver

Output up to 5.1 channels




Next

Tip: You can also modify it by settings.

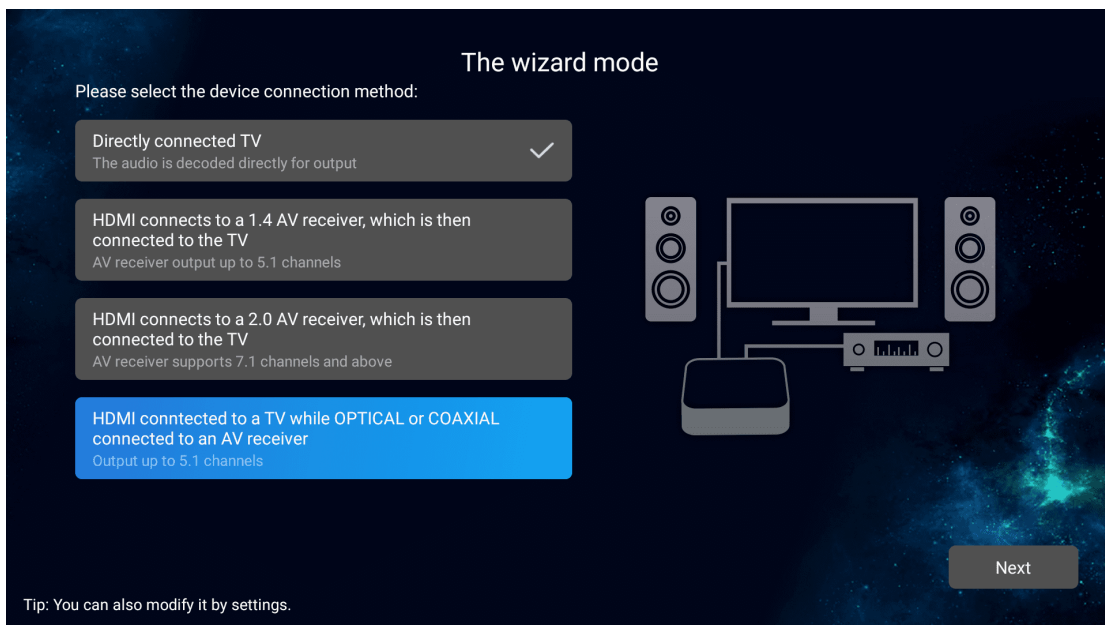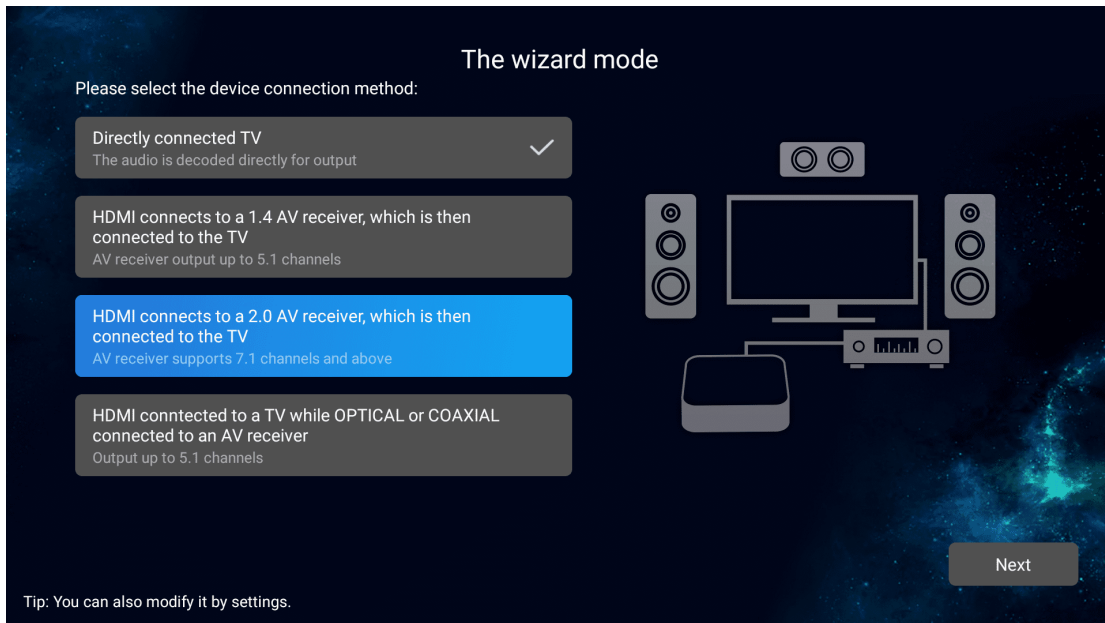


## 5.2 Expert Mode

The expert mode is suitable for users who are very familiar with Zidoo media players.

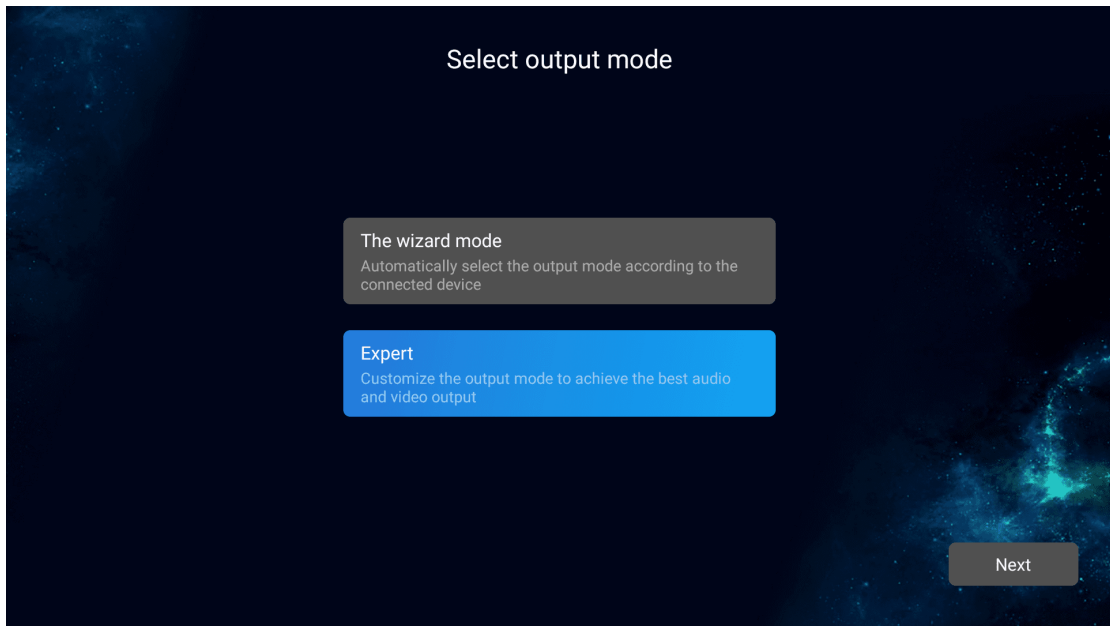


It is recommended to set resolution to "AUTO", or set to the highest resolution that the display device can support.

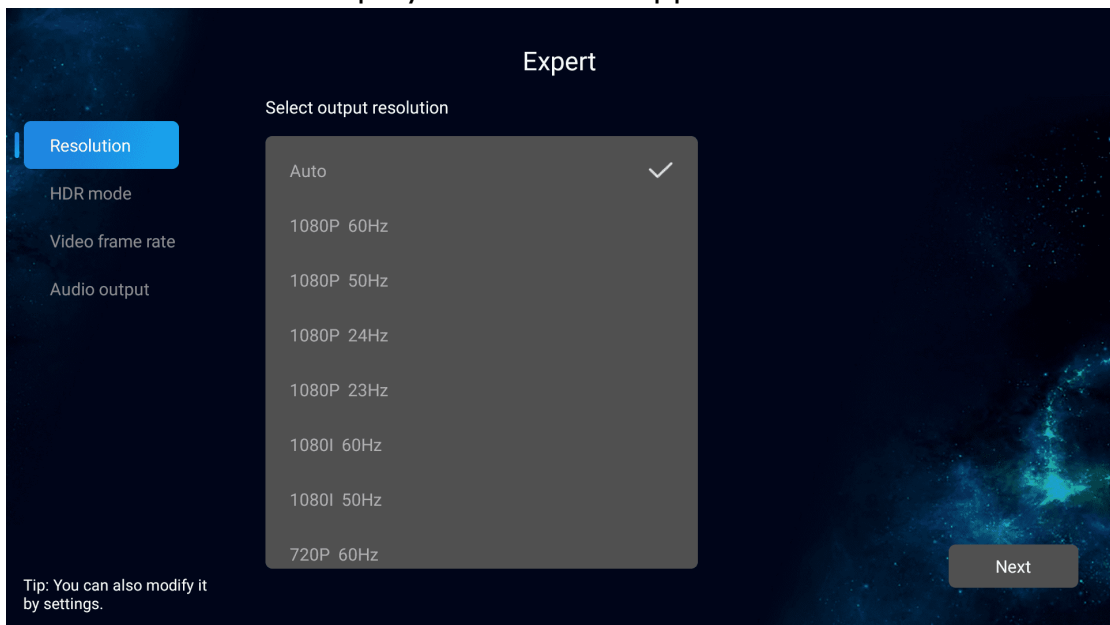



## HDR mode



LLDV TV: It is recommended to choose “AUTO” or “Dolby Vision Low Latency(LLDV,YUV422,12 Bit)” .

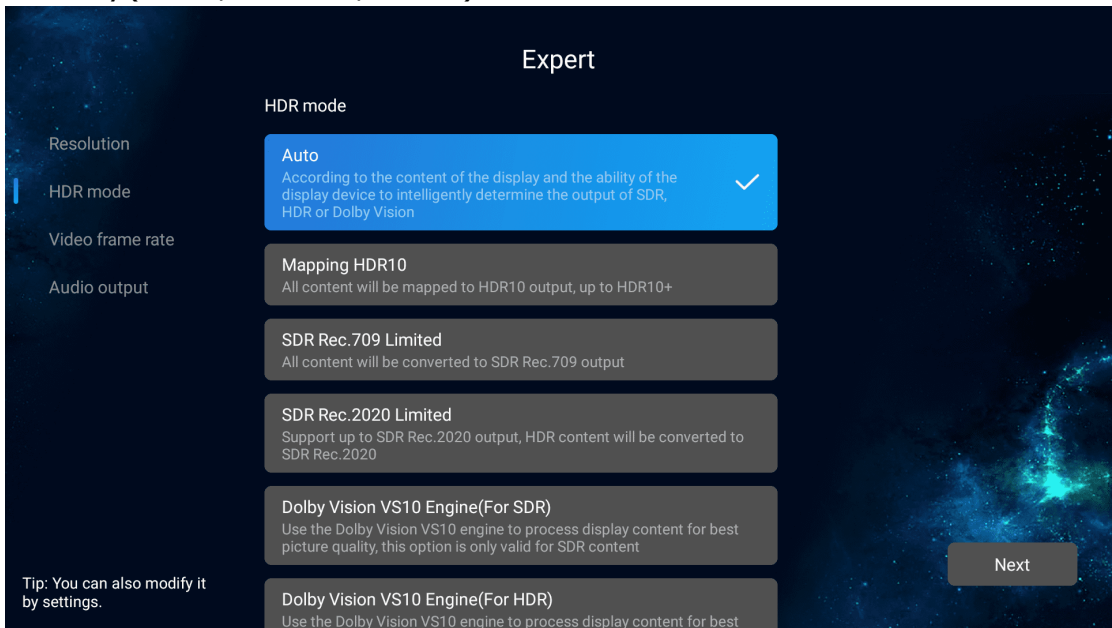



HDR TV: It is recommended to choose “AUTO” or “Dolby Vision VS10 engine (for HDR)”.

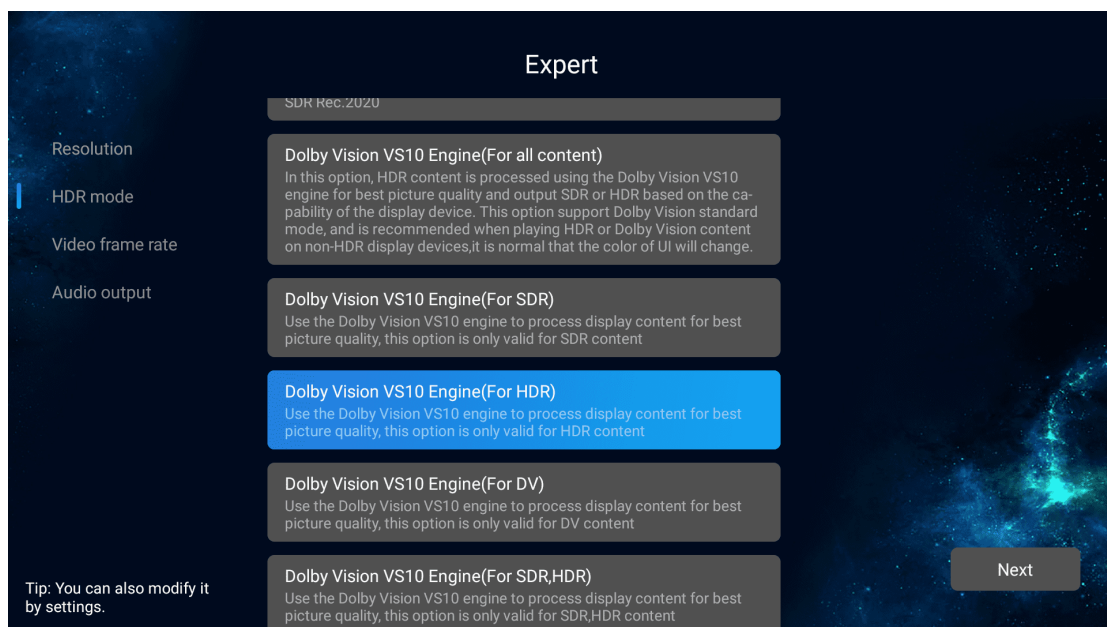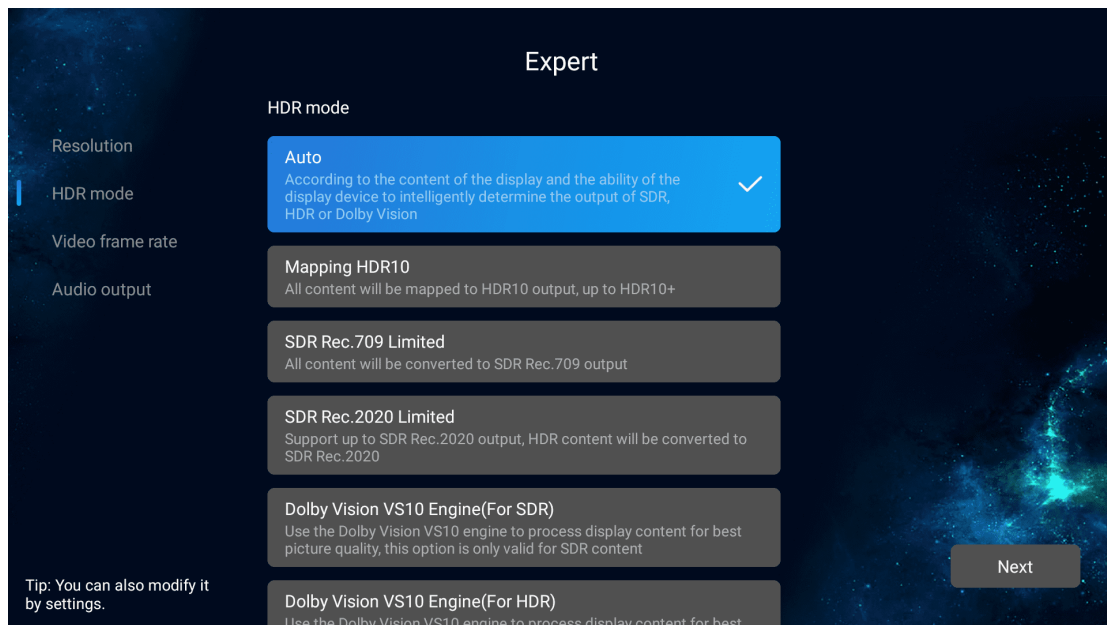


SDR TV: It is recommended to choose "AUTO" or "Dolby Vision VS10 engine (for SDR,HDR,DV)".

the display device can choose the VS10 engine directly, and the VS10 engine can convert HDR to SDR, which will help enjoy good image quality near HDR.



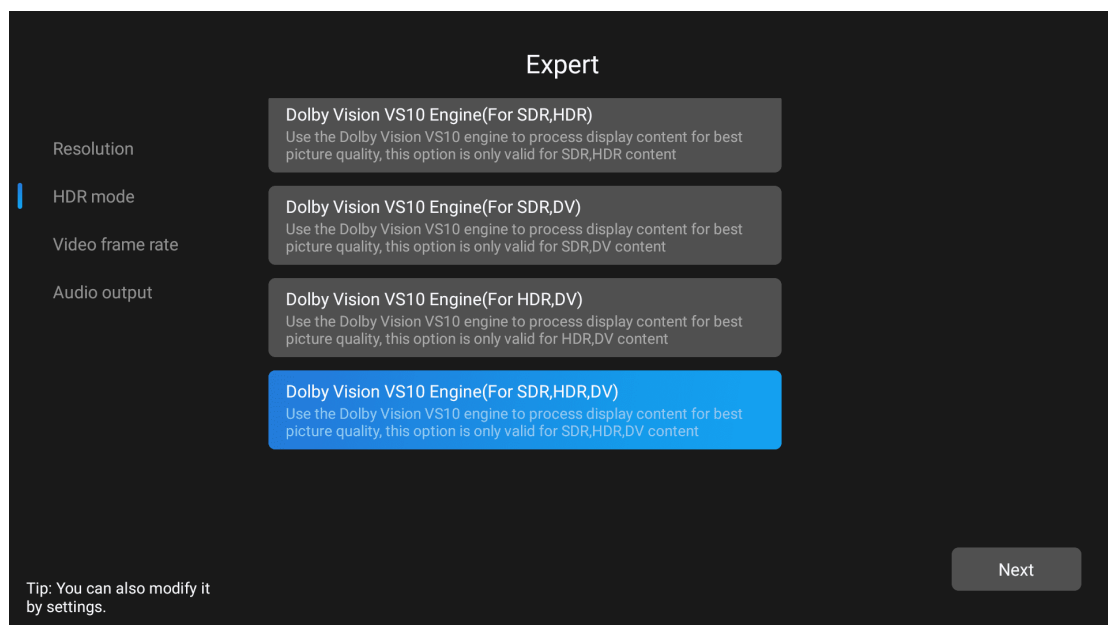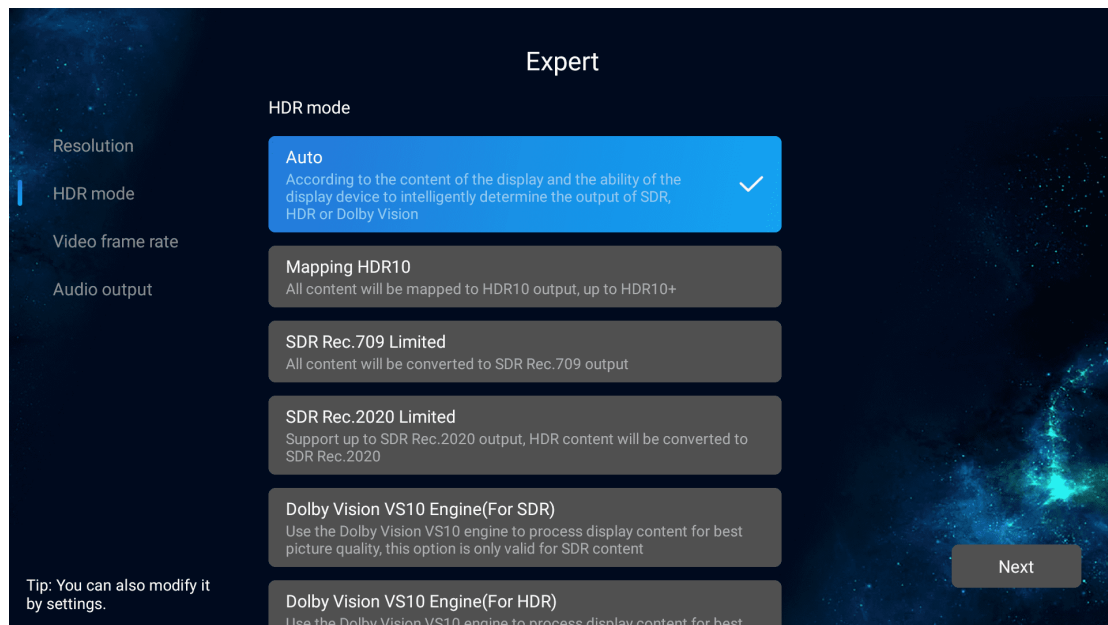


After selecting to switch frame rate and resolution, the media player will output with films' original frame rate and resolution if it is supported by a display device.

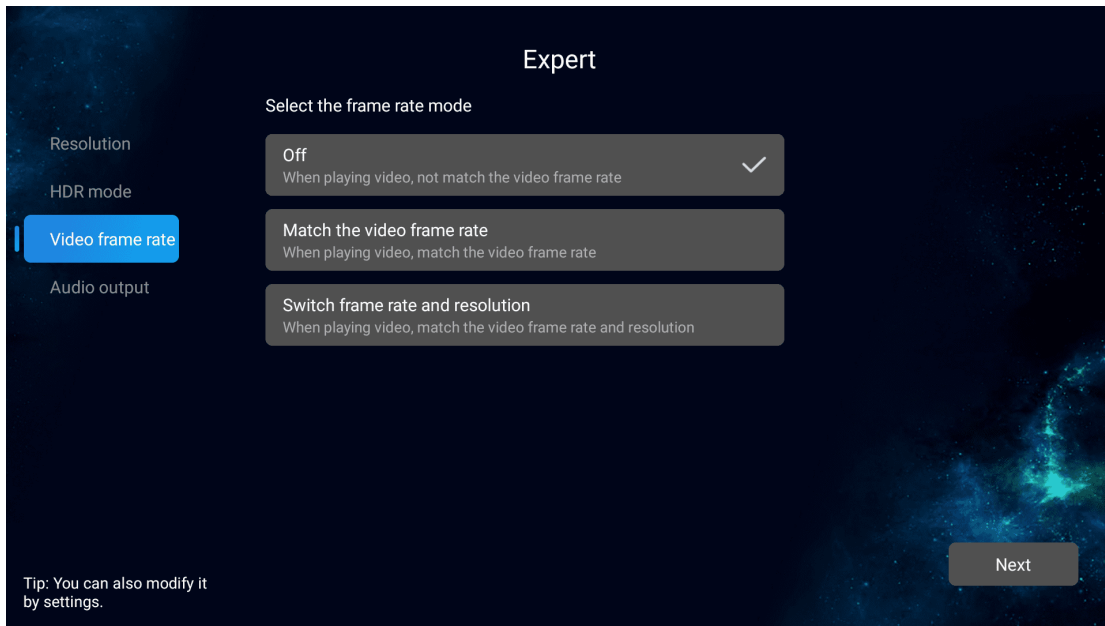


### Audio output


Choose HDMI audio output according to device connections. When the amplifier and soundbar support multi channel decoding, please choose "RAW". If not, then choose "LPCM 2 Channel".

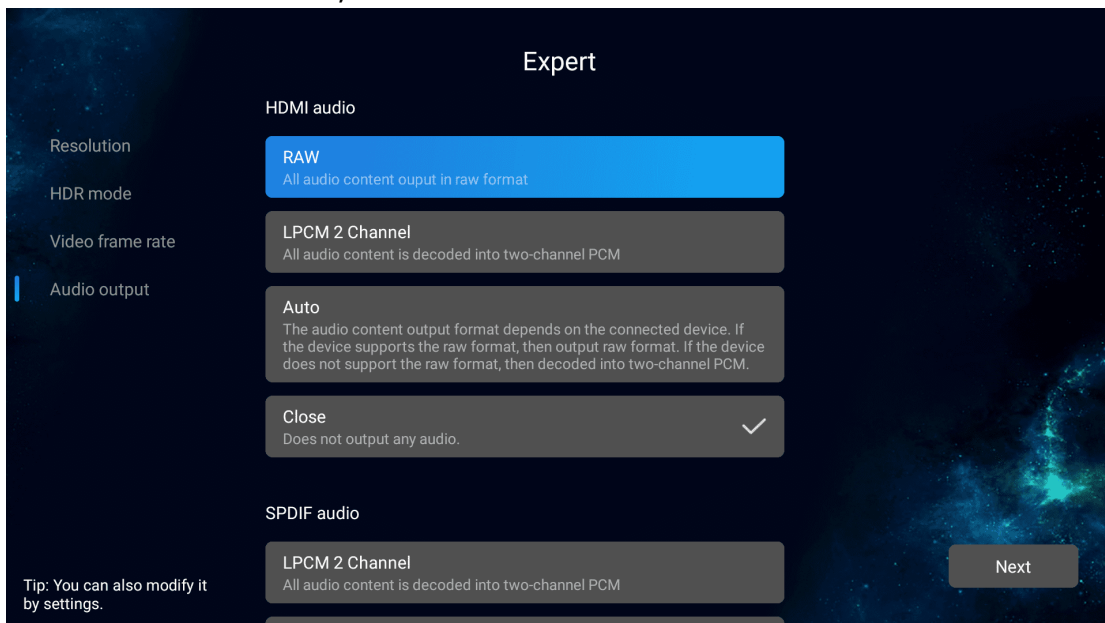

SPDIF audio setting is the same principle as HDMI audio setting.

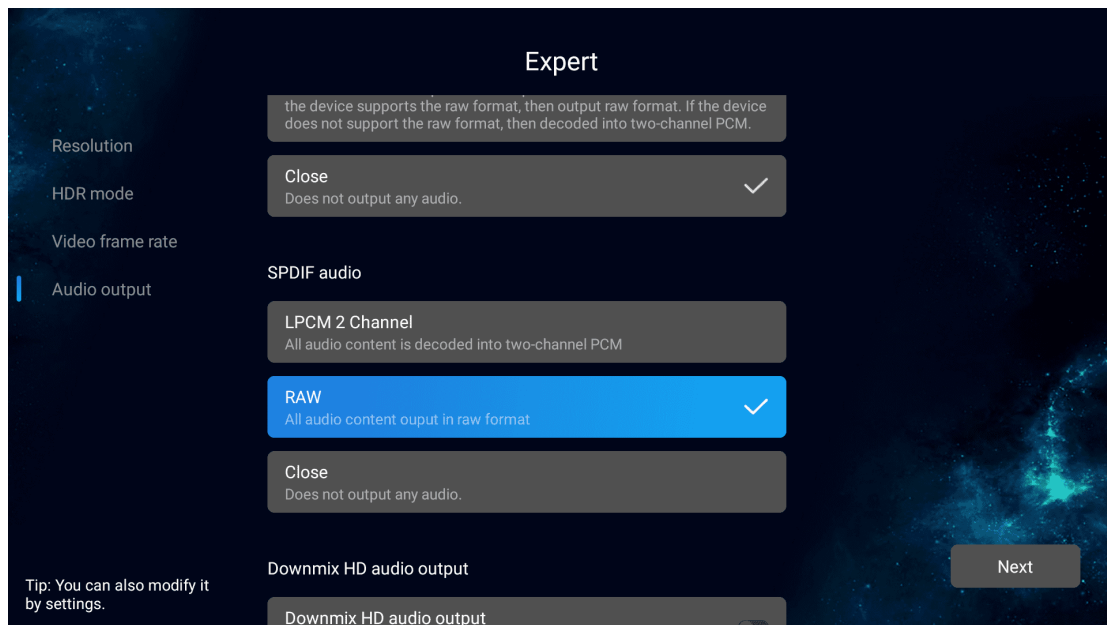


SPDIF output supports up to 5.1 only. It is needed to turn on “Downmix HD audio output” for 7.1, or there might be no sound output.

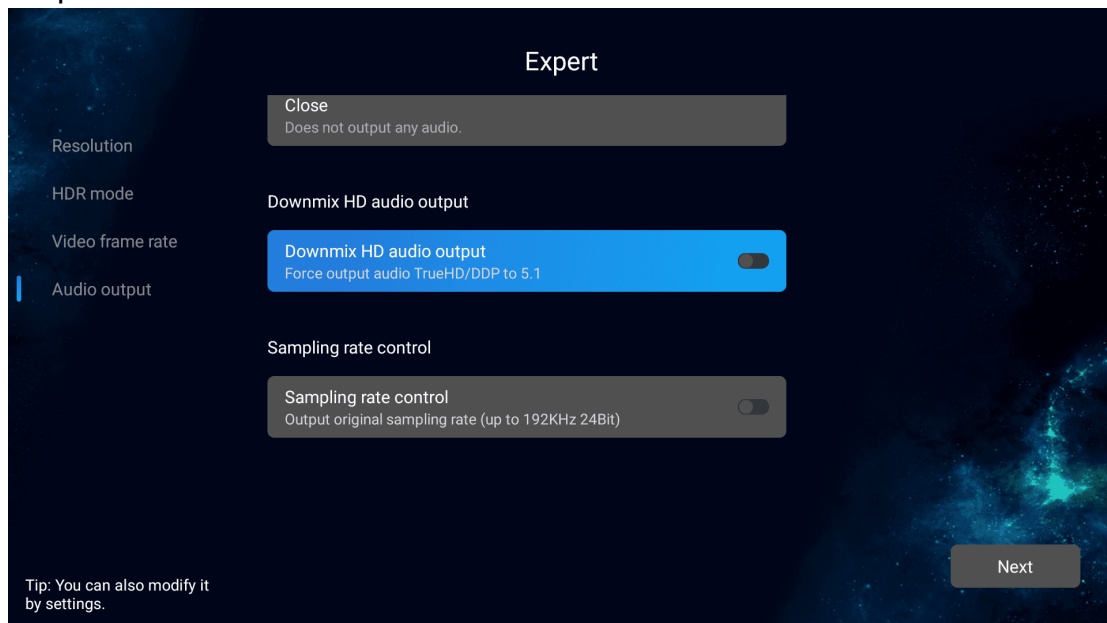

## 6.The Key Definition


Number keys, subtitle key, audio key, up and down keys, page turning keys can be set according to your preference, so that set can be done by one key easily when playing movies.

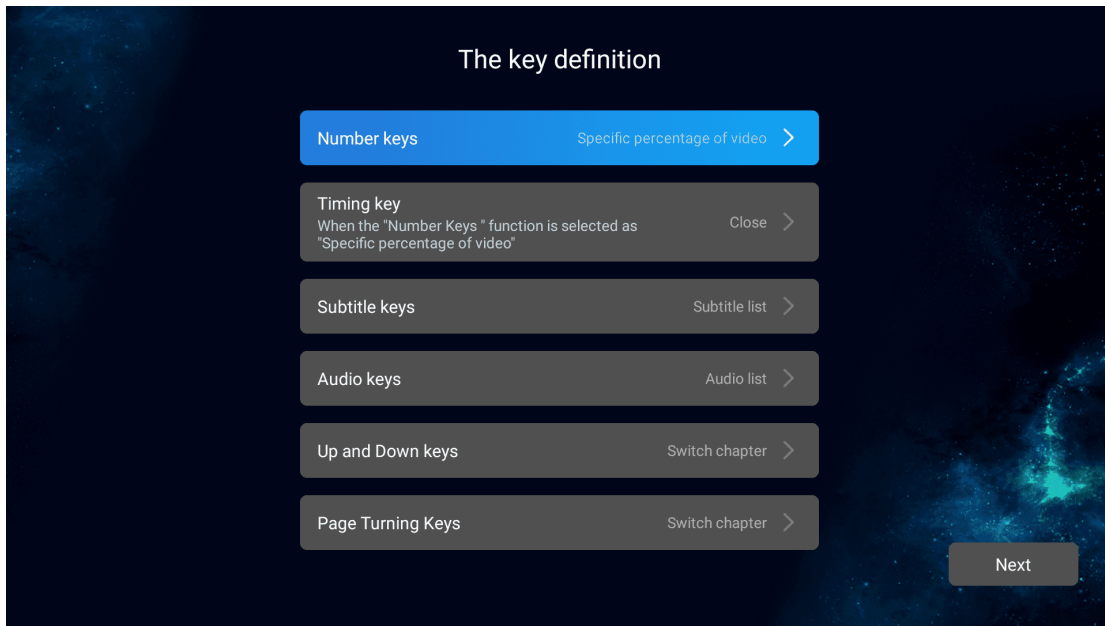


## 7. Page Introduction

The page introduction shows below, which can be customized with this guide:


<https://docs.google.com/document/d/1UUrNfnfAct9tpCOBj8cq3Vn57TEk17hp/edit?usp=sharing&oid=108287286436805054103&rtpof=true&sd=true>

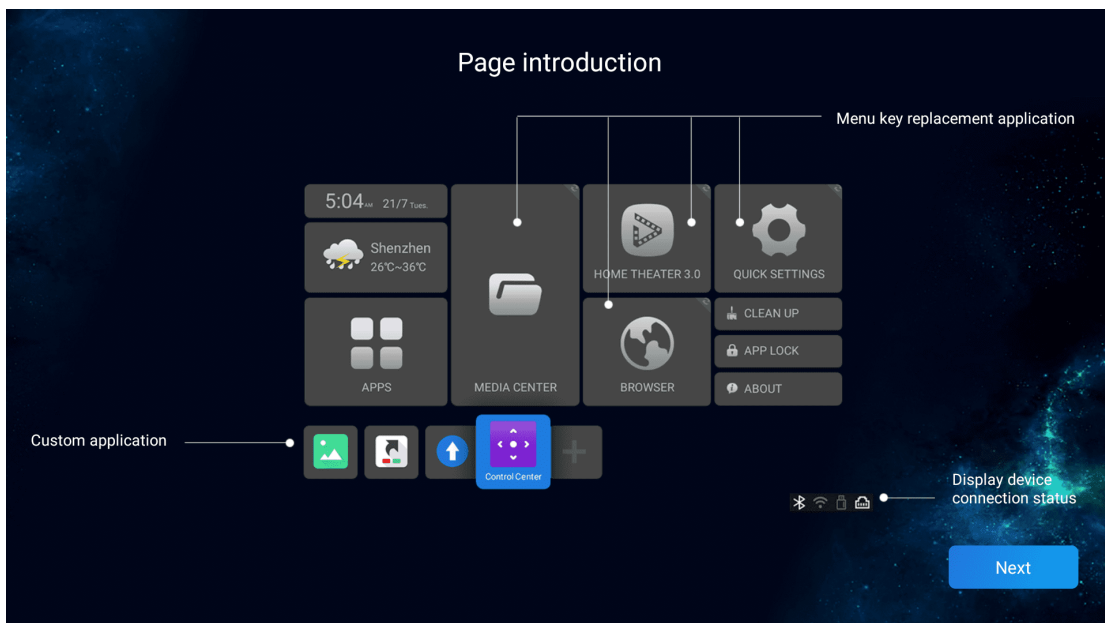

The Boot Wizard setting is finished when the page below shows up.

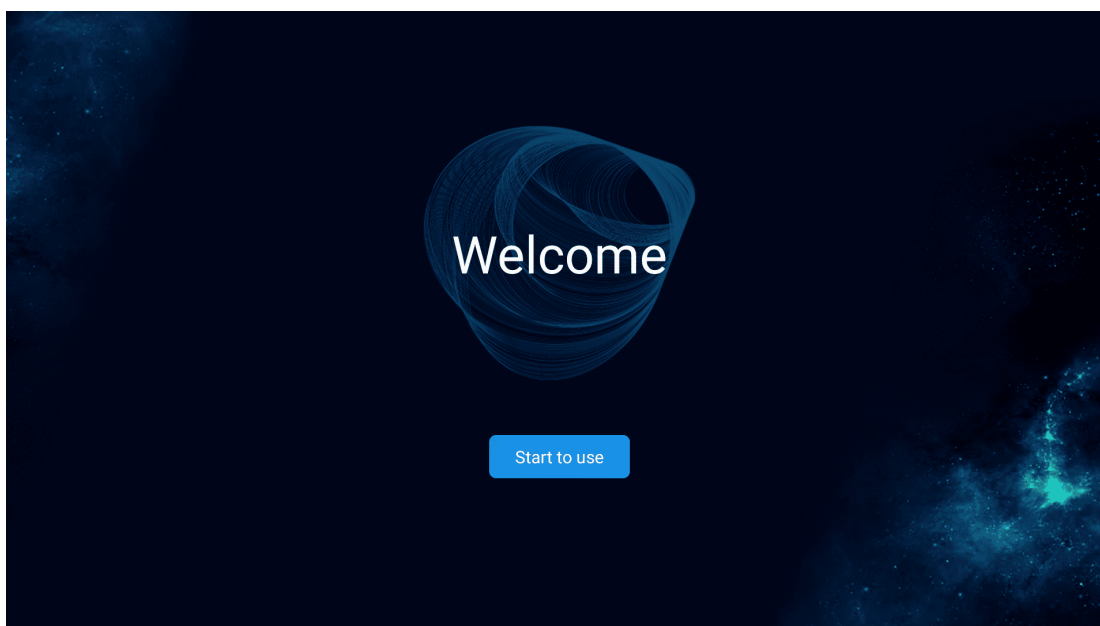

Click "Start to use" to access the homepage.

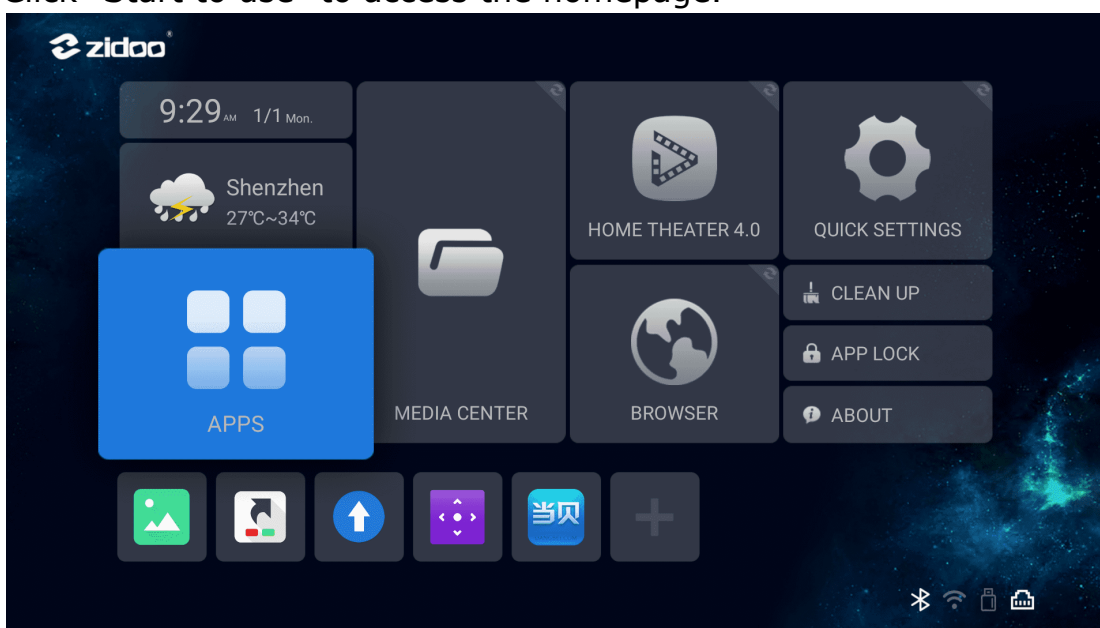

**THE END**