

Toyota 4Runner 5th Gen - 3.5" Dash Speaker Adapter Mount Tweeter Upgrade Instructions


Links to parts used:

- **Dash Tweeter to 3.5" Adapters Etsy:**
<https://bthornedesigns.etsy.com/listing/1621020247>
- **3.5" Speakers:** <https://a.co/d/6GZLLK1>
- **Wiring Harness:** <https://a.co/d/1MI2PnS>

Helpful Videos:

- <https://youtu.be/4dhHyYSyMPs?si=-1rQKehvrjMuu06Z> (full install by VikingsGarage)
- <https://youtu.be/ZpqHmOZfWew?si=CZR8j49rPbfsoMEi> (For premium JBL systems)


1. Remove plastic cover with a trim tool or flathead (be careful not to scratch the dash).

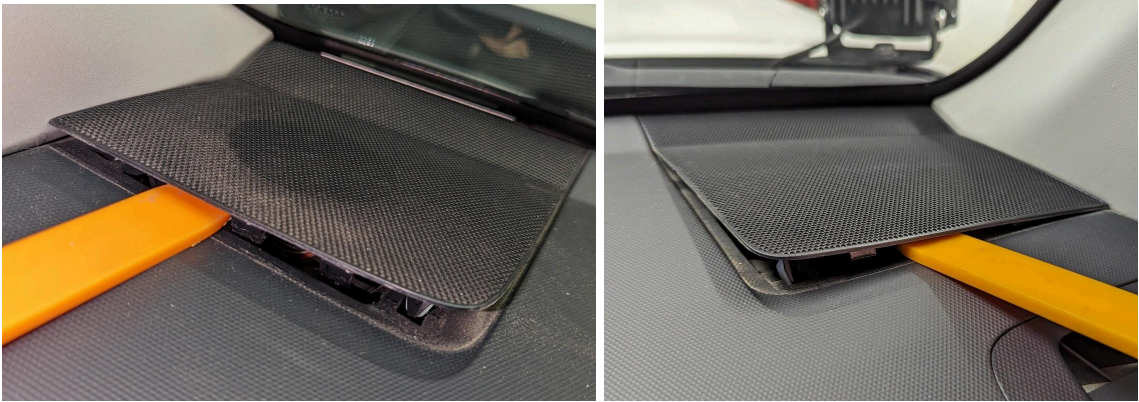

2. Using a 10mm socket or a phillips screwdriver remove the stock tweeters and disconnect OEM harness.



3. Use the harness to wire the new 3.5" speaker. If your speaker requires one, solder in a bass blocker with the positive line. **Speakers linked already have this built into the speaker allowing it to be completely plug-n-play. (SEE LAST PAGE FOR JBL PREMIUM SYSTEM WIRING)**

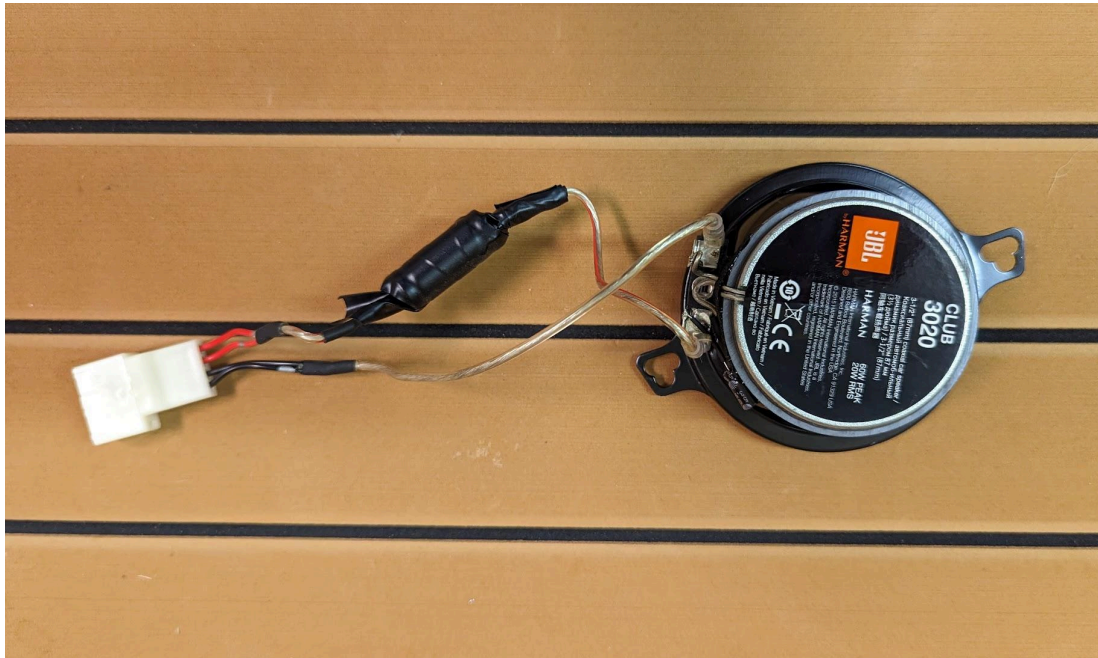

4. Place the new speakers in the adapters (“D” and “P” marked on bottom for driver and passenger sides).



5. Connect the harness to the OEM harness.



6. Install the new speakers using the two 10mm bolts that were removed from the OEM tweeter.



7. Snap covers back on (some trimming may need to be done depending on the 3.5" speakers you use).



For those with the JBL system I have found this diagram that helps. You may reuse the factory harness off your OEM tweeter instead of the linked one.

