



QYT-KT7900D DTMF microphone keyboard diagrams.  
Made for [https://t.me/SATCOM\\_UHF](https://t.me/SATCOM_UHF) community.


Nothing pressed  
25H + 5L

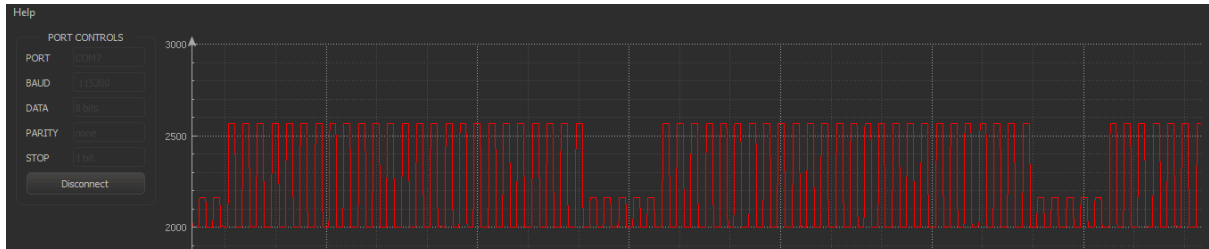


1 pressed  
5H+1L+1H+3L+15H+5L

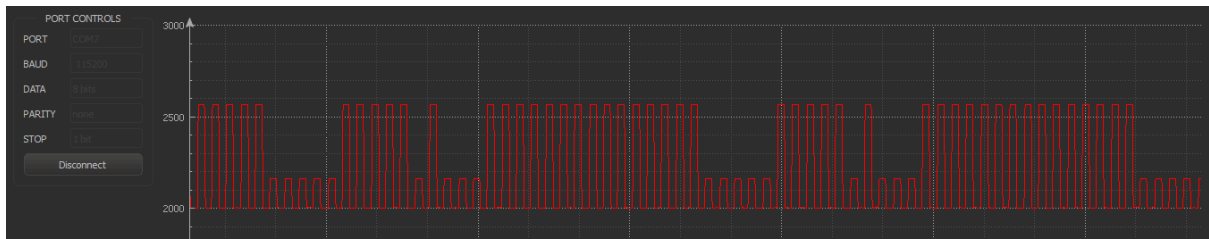

2 pressed  
5H+2L+1H+2L+15H+5L

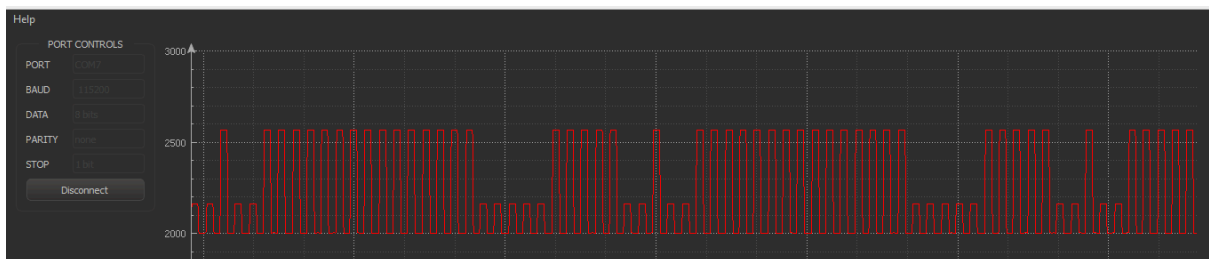


3 pressed  
5H+3L+1H+1L+15H+5L

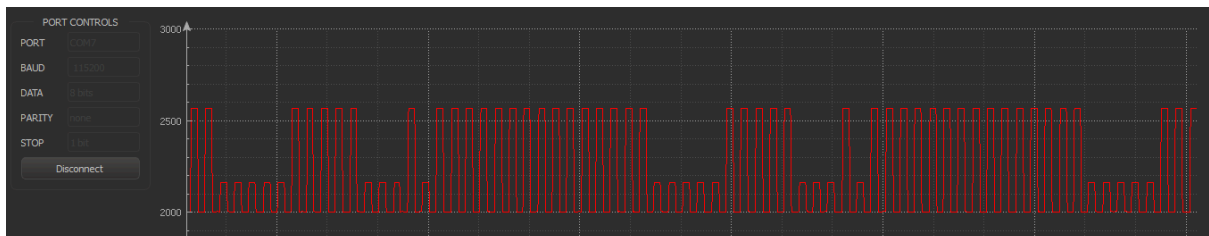


4 pressed

10H+1L+1H+3L+10H+5L

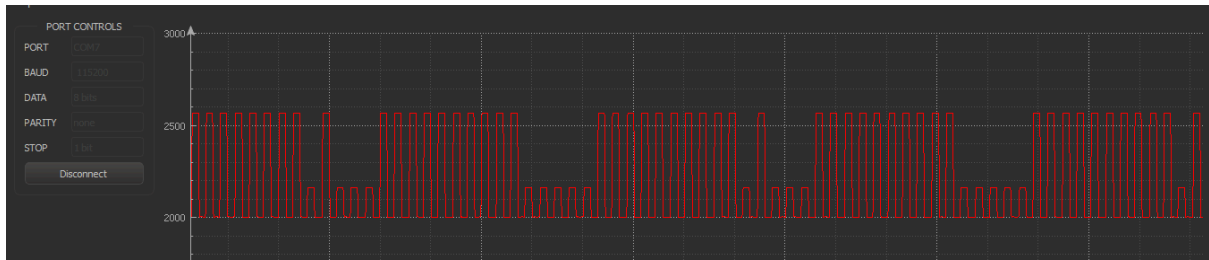


5 pressed

10H+2L+1H+2L+10H+5L

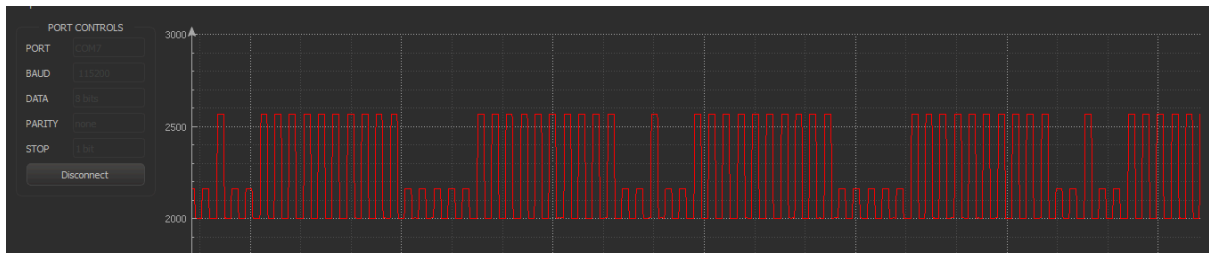


6 pressed

10H+3L+1H+1L+10H+5L

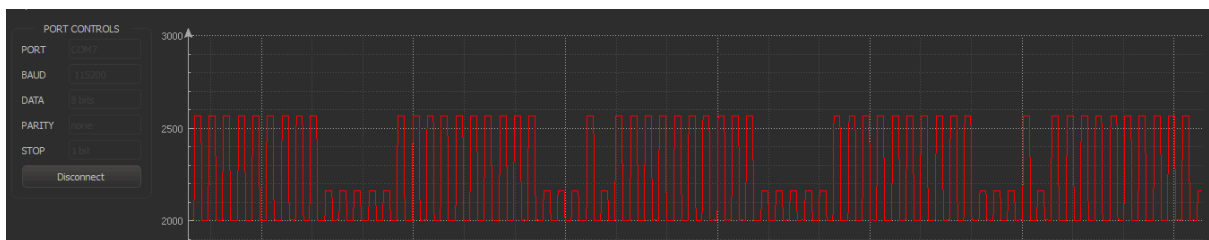


7 pressed

15H+1L+1H+3L+5H+5L

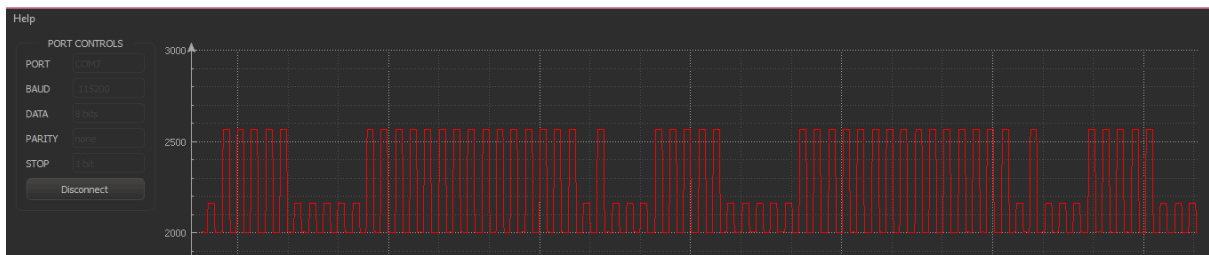


8 pressed


15H+2L+1H+2L+5H+5L

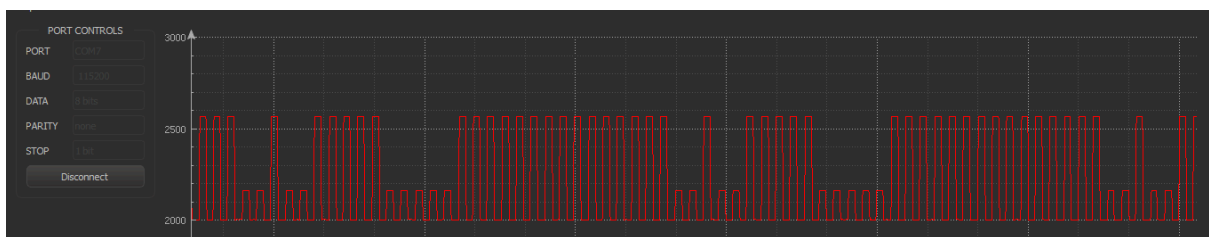


9 pressed  
15H+3L+1H+1L+5H+5L

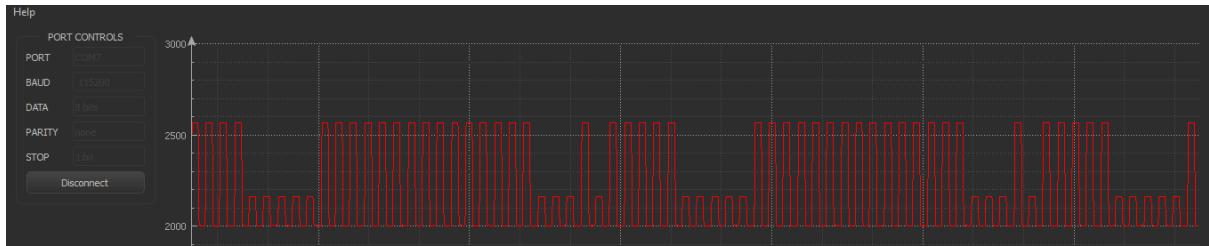


\*(scan) pressed  
5H+4L+16H+5L

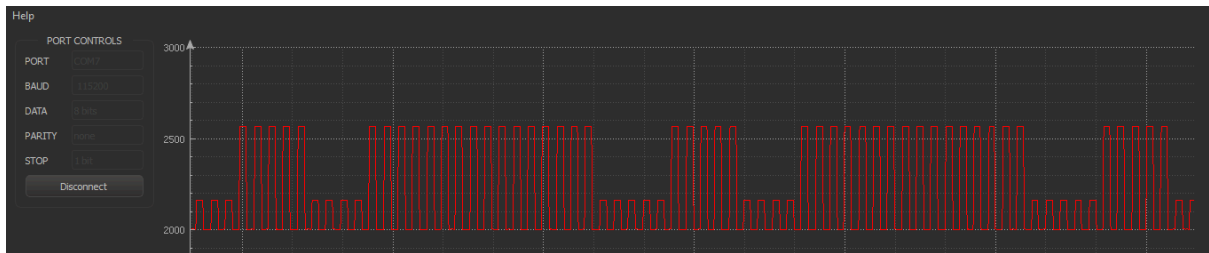


0 pressed  
10H+4L+11H+5L

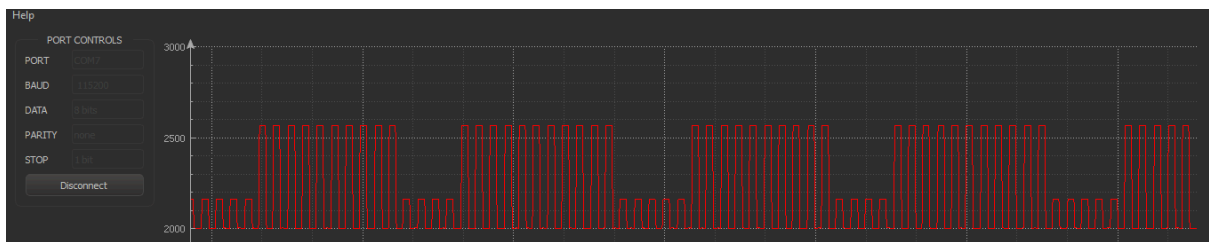


#(lock) pressed  
15H+4L+6H+5L

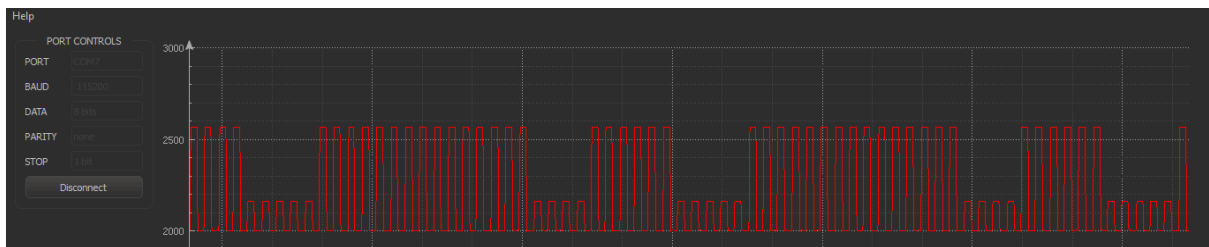


Menu pressed  
6L+1H+3L+20H

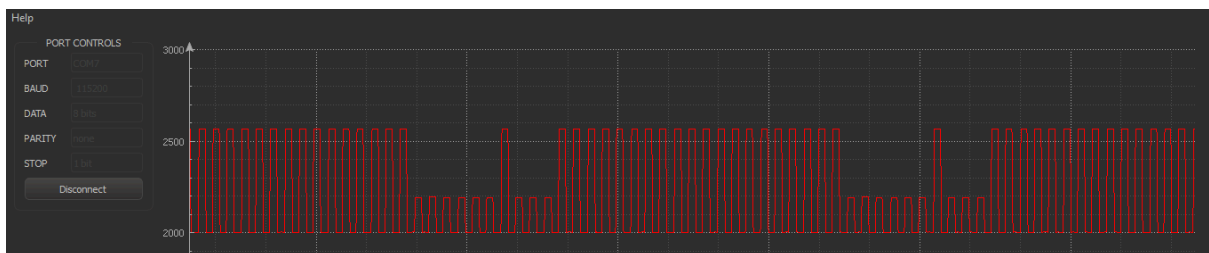

Up pressed  
7L+1H+2L+20H

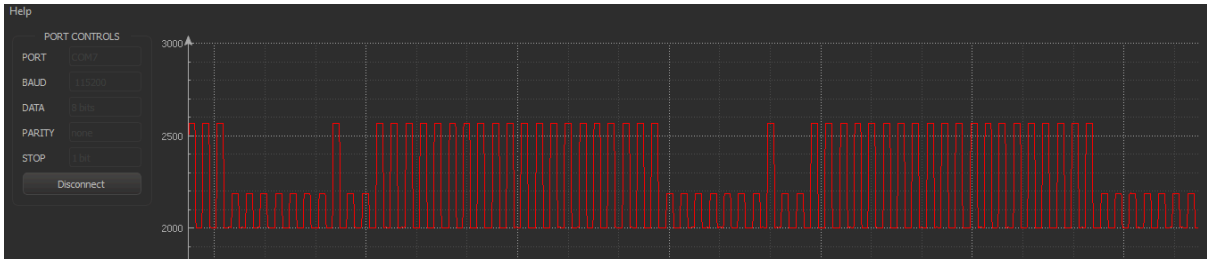

Down pressed  
8L+1H+1L+20H

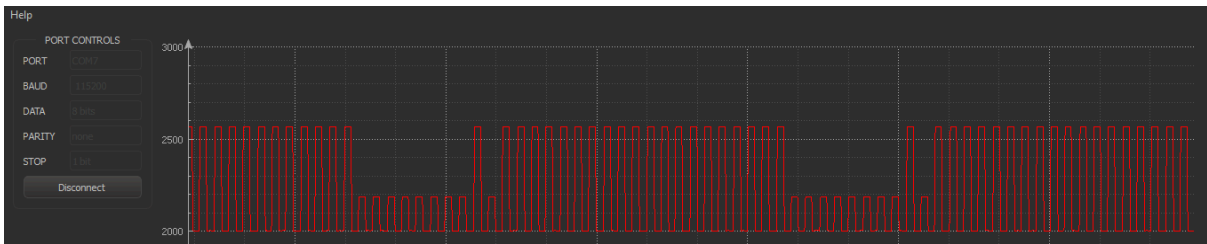

Exit pressed  
9L+21H

