

Journal homepage: <https://www.scribd.com/document/444444444>
ISSN: XXXX-XXXX

Full Name¹, Corresponding Author^{1,1*}, Author² (All Authors names must be written in a **FULL NAME; Font type: Calibri; Font size: 12; Paragraph: Align Left), encouraged to collaborate with intl author**

Author	
	@gmail.com
	@gmail.com
	@gmail.com
Additional row if needed	Additional row if needed

- | | |
|--|---|
| | |
| <p> :
 sed form
 :
 ee keywords; avoid too general and too
 keywords; CDF Letters (Please use
 on as separator) </p> | <p> ld state a short introduction of background study, problem statement, purpose of the
 , briefing about the used method, principal results and major conclusions. These six
 should be included in abstract section (Compulsory). Citation or References and
 ndard or uncommon abbreviations should be avoided in the abstract. The number of
 hould not exceed 350. </p> |

The first sentence should start here [1]. Should have one spacing after section header. The indent of the first line of paragraph should be 0.63cm. Content in body paragraph should be written with the Font style: Calibri; Font size: 12; Paragraph: Justify; Line spacing: 1.0. **For example:** The last

<https://doi.org/10.37934/journal.XX.X.XX>

few decades have witnessed vast research on new types of heat transfer fluids, namely nanofluids. Nanofluid is a fluid that contains nanometer-sized solid particles. The nanofluid was introduced by Choi *et al.*, [2] and it has been proven to give better heat transfer efficiency compared to conventional fluids. Detailed reviews on the physical and thermal properties of nanofluids can be seen in review papers by several authors [3-5]. **Important note: Citation cannot stand alone as subject or object. It just as a supportive to a statement.** For example, “was also conducted by [4]”, should be written as “was also conducted by Uithof *et al.*, [4]” (*et al.*, must be in italic style)

Second paragraph starts here (**no spacing between paragraphs**). **For example:** A nanofluid can be produced by dispersing metallic or non-metallic nanoparticles or nanofibers with a typical size of less than 100 nm in a base liquid.

Generally, in manuscript, should have: **1. Introduction** (research background and Literature Review); **2. Methodology**; **3. Result**; **4. Conclusion**; **Acknowledgment**; **References**. You may add more if required. The style of the section header as bellow:

1. Introduction (Capital Letter of Each Word; No indent; Font style: Calibri & Bold; Font Size: 12)

1.1 Sub Section Header (Capital Letter of Each Word; No indent; Font style: Calibri & Italic; Font Size: 12)

1.1.1 Sub sub section header (Sentence case; No indent; Font style: Calibri & Italic; Font Size: 12)


Header level three (1.1.1) and above will follow header level three style. **No spacing between each header.** However, **before starting the first paragraph**, must have **one spacing after the header.**

In the **last paragraph of introduction section**, Authors should highlight the **gap** and **significant of the research** before write the **objective** of the research. These **three items** are very important and **compulsory**. ----End of Introduction Section----

2. Methodology

2.1 Figure Style and Format

For manuscript publication, all provided Figures must follow the standard of quality for publication. Authors **must provide** a **high quality** with **high resolution Figure**. **Content** in the Figure should be **clear** and **readable** as shown in Figure 1(b) (Especially, the **font size of contour legend**). For example, as in Figure 1

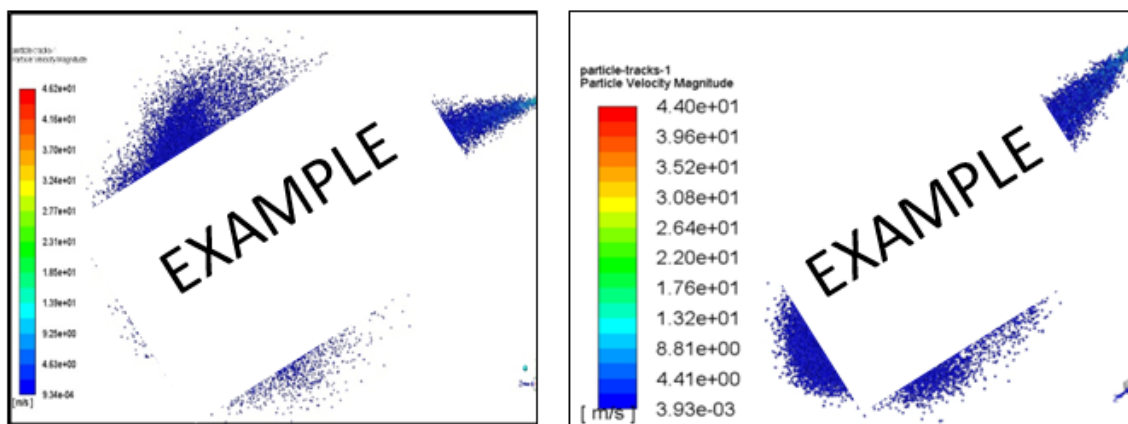

(a) (Font style: Calibri; Font size: 10)

(b)

Fig. 1. Figure quality (a) Unclear and unreadable content (b) Clear and readable content (Font style: calibri; Font size: 11; Paragraph: Align left)

Each Figure must be discussed or mentioned in a body paragraph. The Figure must be placed under the paragraph that discussed about the Figure. Authors should try to make economical use of the space on the page; for example


- i. avoid excessively large white space borders around your graphics;
- ii. try to design illustrations that make good use of the available space—avoid unnecessarily large amounts of white space within the graphic;
- iii. Use the suitable size of Figure. Not too big.
- iv. Individual figures should normally be centered but place two figures side-by-side if they will fit comfortably like this as it saves space.

Captions should be below the figure. The caption **SHOULD NOT** be finished with a full stop (period). The captions should be set to (a) the width of the figure for wider figures (b) centered across the width of the figure, as shown below




Wider figure/wider caption

Fig. 1. In this case simply justify the caption so that it is as the same width as the graphic

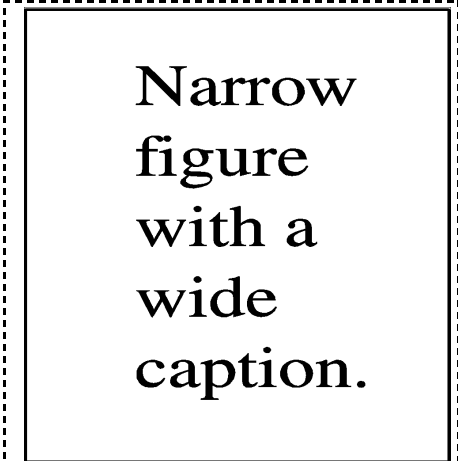

Narrow figure with a wide caption.

Fig. 2. These two figures have been placed side-by-side to save space

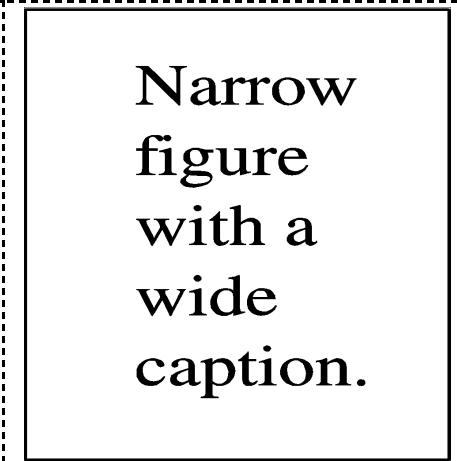

Narrow figure with a wide caption.

Fig. 3. These two figures have been placed side-by-side to save space

Note: For long caption

Wider figure/short caption

Fig. 3. Figure with short caption (caption centred)

Note: For short caption

For example: A model of VFE-2 model was designed and fabricated in Universiti Malaysia wind tunnel under Malaysian Ministry of Education grant, as shown in Figure 2 below [4]. The designed was exactly based on the original profile of Chu and Lucking [6] as Figure 3.

Few years later, a new research group is formed to further investigate the flow structure on the blunt-edged delta wing, the team called as Vortex Flow Experiment (VFE-2). The main objective of the VFE-2 test was to validate the results of Navier-Stokes calculations and to obtain a more detailed experimental data. The VFE-2 experiments were carried out for both sharp and blunt leading edge shape delta wing [1-3].

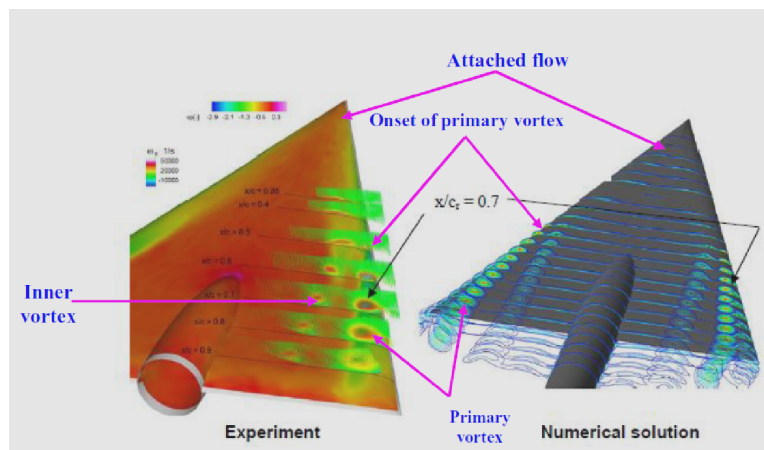


Fig. 2. Comparison of experimental measurement and Numerical studies above VFE-2 configurations at $\alpha=13^\circ$ [2]

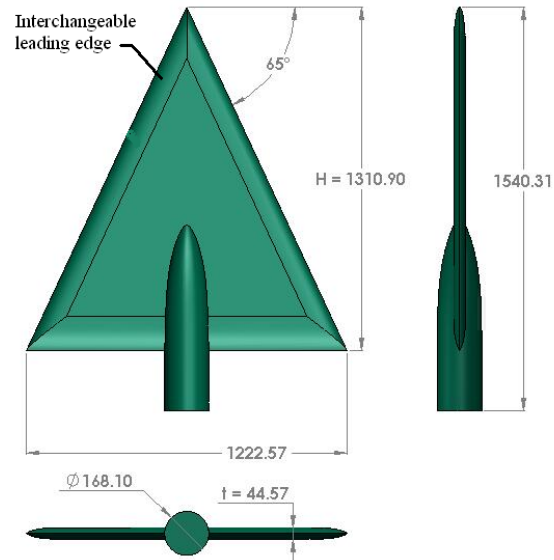


Fig. 3. UTM-LST delta wing VFE-2 profiles

Mat *et al.*, [7] has performed a comprehensive flow visualization studies on blunt-edge delta wing. The primary vortex is developed at certain chordwise position and progress upstream with angle of attack; however, there is no data in VFE-2 indicating that the vortex progressed up to the Apex region with angle of attack increases.

2.2 Table Style and Format

Table should be placed at the center. Each Table must be discussed or mentioned in a body paragraph. The Table must be placed under the paragraph that discussed about the Table. Font style and font size of content in the Table are Calibri and 10, respectively. The content must be align left. The font size of Table caption is 11. The caption **SHOULD NOT** be finished with a full stop (period). The captions should be set to the width or within of the Table.

Table 1

Place the caption above the table. Here the caption is wider than the table

Distance (m)	Velocity (ms^{-1})
A	1
B	2
C	3
D	4

Table 2

Here the caption is shorter than the table

Reynolds number, Re	Velocity, V
A	1
B	2

2.3 Equation Style and Format

All **equation** that mentioned in body paragraph should be written as **Eq. (1)**. Please use Microsoft Equation in order to present an equation. The **font size** of equation is **12**. Each equation must be numbered as follow

$$Re = \frac{\rho V x}{\mu} \quad (1)$$

3. Results

3.1 Pressure Distribution

For example: This section discusses the results obtained from the surface pressure measurement study. The effects of angle of attack, Reynolds number and leading edge bluntness are discussed in the next sub section.

3.1.1 The effect of angle of attack

The test configuration for this experiment is in **Table 1**. Nevertheless for the experiment at Reynolds number of 2×10^6 , the angle of attack was limited to $\alpha = 23^\circ$ only.

Table 1

The values of Reynolds number and velocity

Reynolds number, Re	Velocity, V
1×10^6	18 m/s
2×10^6	36 m/s

To differentiate the effects of Reynolds number, the experiments was also performed at two speeds of 18 m/s and 36 m/s that corresponding to 1×10^6 and 2×10^6 Reynolds number, calculated from **Eq. (1)** and summarize in Table 1.

$$Re = \frac{\rho V x}{\mu} \quad (1)$$

where the dynamic viscosity, μ , density of air, ρ and length, x were taken as 1.846×10^{-5} kg/ms 10^{-5} , 1.18 kg/m 3 and 0.874 m respectively.

4. Conclusions

In **conclusion part**, **Author** should **highlight** the **finding** of their research that **respond** to the research **objective**. **For example:** The experimental data of UTM-LST VFE-2 model at high angle of attack is presented here. More experiments are needed to verify this complicated flow topology.

Acknowledgement

This research was funded by a grant from Ministry of Higher Education of Malaysia (FRGS Grant R.J130000.7824.4X172).

(Note: This part is **compulsory**. If this research was **not funded** by any grant, please write "**This research was not funded by any grant**")

References

The list of references should only include works that are cited in the text and that have been published or accepted for publication. Personal communications and unpublished works should only be mentioned in the text. Reference style should be in **Chicago style**. Please use this [link](#) for the **DOI number**.

References (Reference style: Chicago style – must write DOI) Minimum 20 references

- [1] Hummel, D. (2008). *Chapter 17 – The International Vortex Flow Experiment 2 (VFE-2): Objectives and Overview*. RTO-TR-AVT-113, Page 17-1 – 17-20.
- [2] Luckring, J.M. and Hummel, D. (2008). *Chapter 24 – What Was Learned From The New VFE-2 Experiments*. RTO-TR-AVT-113. <https://doi.org/10.2514/6.2008-383>
- [3] Mat, Shabudin Bin, Richard Green, Roderick Galbraith, and Frank Coton. "The effect of edge profile on delta wing flow." *Proceedings of the Institution of Mechanical Engineers, Part G: Journal of Aerospace Engineering* 230, no. 7 (2016): 1252-1262. <https://doi.org/10.1177/0954410015606939>
- [4] Said, Mazuriah, Shabudin Mat, Shuhaimi Mansor, Ainulotfi Abdul-Latif, and Tholudin Mat Lazim. "Reynolds Number Effects on Flow Topology Above Blunt-Edge Delta Wing VFE-2 Configurations." In *53rd AIAA Aerospace Sciences Meeting*, p. 1229. 2015. <https://doi.org/10.2514/6.2015-1229>
- [5] Luckring, James M. "Initial experiments and analysis of blunt-edge vortex flows for VFE-2 configurations at NASA Langley, USA." *Aerospace Science and Technology* 24, no. 1 (2013): 10-21. <https://doi.org/10.1016/j.ast.2012.02.005>
- [6] Konrath, Robert, Christian Klein, and Andreas Schröder. "PSP and PIV investigations on the VFE-2 configuration in sub-and transonic flow." *Aerospace Science and Technology* 24, no. 1 (2013): 22-31. <https://doi.org/10.1016/j.ast.2012.09.003>
- [7] Fritz, Willy. "Numerical simulation of the peculiar subsonic flow-field about the VFE-2 delta wing with rounded leading edge." *Aerospace Science and Technology* 24, no. 1 (2013): 45-55. <https://doi.org/10.1016/j.ast.2012.02.006>
- [8] Chu, J. and Luckring, J.M. (1996). *Experimental Surface Pressure Data Obtained on 65° Delta Wing across Reynolds Number and Mach number Ranges*. NASA Technical Memorandum 4645. (Sharp-edged report)