


Small-Sized 3F~50F/2.7V XP

Nesscap's small-sized EDLC cells range from 3F to 50F in capacitance with operating voltage of 2.7V.

These cells can be used in various types of applications which mainly require smaller amounts of capacitance but immediate pulse power, such as,

AMR (Automatic Meter Reading), consumer electronics and SSDs (Solid State Drives)

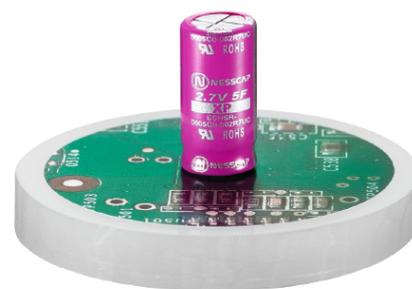

Size	Rated Volt (VDC)	Rated Cap (F)	MAX ESR(mΩ)	Dimension(mm)				Volume (ml)	Weight (g)	Part Number	Spec sheet Download
			DC	D	L	W	T				
	XP 2.7	3	70	8	19.5			1.0	1.4	ESHSR-0003C0-002R7UC	
	XP 2.7	5	45	10	20.5			1.6	2.1	ESHSR-0005C0-002R7UC	
	XP 2.7	6	33	8	29			1.5	2.1	ESHSR-0006C0-002R7UC	
	XP 2.7	10	30	10	30.5			2.4	3.2	ESHSR-0010C0-002R7UC	
	XP 2.7	25	25	16	25.5			5.0	6.8	ESHSR-0025C0-002R7UC	
	XP 2.7	50	16	18	41			10.2	12.4	ESHSR-0050C0-002R7UC	

詳細規格請參考附件檔案

業務請洽承實業有限公司, 業務鄭瑞明 Tel : 02 2898 4050, MP : 0916 205145

Email : ray@compplus.com.tw & ray.jeng@seed.net.tw