


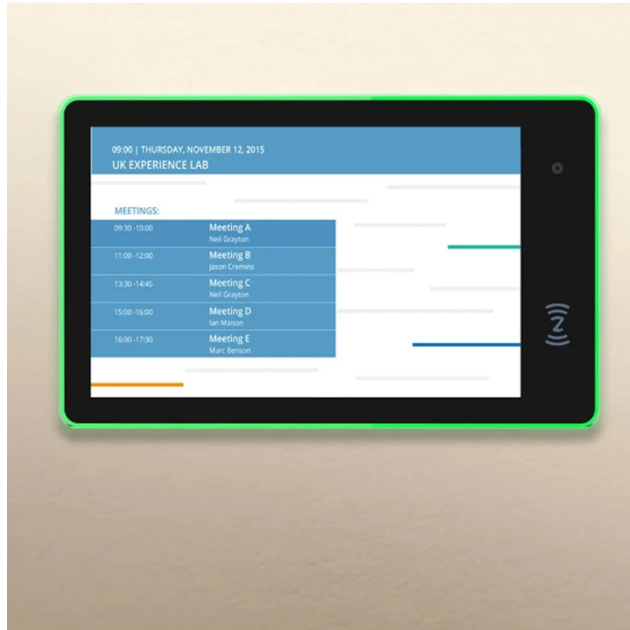

- **Display: 10.1" inch IPS 1280*800 10 Points Capacitive Touchscreen, Wide Visual Angle**
- **System: Android 12**
- **Built-in POE 802.3af/at 48V Standard (Optional RJ45/DC-In)**
- **Front Camera (5MP)**
- **Boot-up on power on**
- **Auto Power-on feature**
- **Optional NFC Mifare card reader or RFID 125Khz**
- **Wall mount options: Surface VESA mount and Glass Wall Mount**
- **Full surround LED status with RGB color (Programmatically controlled)**

This 10.1" Android touch screen display with a programmable LED full surround status bar supports built-in PoE and optional NFC/RFID reader making it ideal for a wide variety of applications such as digital signage displays, POS retail kiosks, employee time & attendance, meeting room booking & scheduling and home automation. The unit can be conveniently mounted on a wall using a standard VESA mount for surface wall mounting or on a glass wall with a special side mount.

The Android display supports a high resolution IPS screen with a resolution of 1280x800 and a brightness intensity of 350 nits.

The unit supports a built-in RJ45x1 port to connect to ethernet or PoE. The unit supports PoE (802.3af) and PoE+ (802.3at) standards. The tablet supports VESA 75x75 and can be surface mounted on walls using any Surface VESA wall mount plates. A mounting bracket is available to enable the display to be side mounted on wall frames which is ideal for installing on glass walls.

The unit supports an optional NFC Mifare 13.56 Mhz card reader for ID cards. or RFID 125Khz Low-frequency ID cards.

SPECIFICATIONS:

General	
Operating System:	Android 12
Display Technology:	IPS 10 Points capacitive touch screen
Screen Size:	10.1 inch
Max Resolution:	1280*800 aspect ratio 16:10, 300 Nits brightness
CPU Type:	Rk3288 Octa-Core cortex-A64,1.5Ghz
CPU Manufacturer:	Rockchip
CPU Speed:	1.5GHZ
RAM / Technology:	DDR3
RAM Installed Size:	2GB or optional 4GB
Hard Drive Type:	8GB NAND FAST FLASH
PCMCIA Expansion:	T-FLASH(Support 16G MAX)
Camera:	Front Camera 2.0MP
LED Light Bar:	Full Surround light bar. with API to control the Lighting
NFC	MIFARE 13.56MHz (optional)
RFID	LF 125KHz (optional)
Audio:	2 x 1.5W (side speakers)
Language:	Multi-language support
Power Supply	12V/2A
Voltage required:	100/240V
Bluetooth	Bluetooth v2.1+EDR/Bluetooth 3.0/3.0+HS/4.0
Mounting Options	Wall mount options include surface mount VESA 75×75 or 100×100 Open frame for flush wall mount.
Item Dimensions/ W*D*H:	277*163*14mm
Shipping Dimensions/ W*D*H:	23*18*7CM
Net Weight:	600G
Input/Output Connectors	
Ports:	2 x USB (host) 1 x USB OTG 1 x RJ45/PoE 1 x Micro Sd Card slot 1 x DC jack 1 x Earphone jack
Communications	
Networking / DLP:	Built-in LAN port for Fast Ethernet or PoE 802.3af/at
Wireless Connection:	WIFI
Wireless Protocol:	802.11 b/g Dual frequency 2.4GHz and 5GHz