

PSN COLLEGE OF ENGINEERING AND TECHNOLOGY

(An Autonomous Institution Affiliated to Anna University)

Melathediyoar, Tirunelveli-627152

Department of Mechanical and Automation Engineering



QUESTION BANK

Degree/Branch: BE/MAE

Semester: III

Subject Code/Title: ME606105 INTERNAL COMBUSTION ENGINE

Regulation: 2022

Academic Year: 2024-2025

Prepared By:

A.SUBULAKSHMIAP/MAE

PSNCET


UNIT 1: FUEL SUPPLY SYSTEMS IN CI AND SI ENGINES			
Introduction-carburetion- mixture requirements-simple carburetor, compensation devices, high altitude fuel supply device-, Electronic injection system, CI engine- Injection systems-Mechanical and electronic-Combustion in CI engines			
Part A (2 marks)			
Q.No	Question	BT Level*	Competence#
1	Define carburetion? The process of formation of a combustible fuel-air mixture by mixing the proper amount of fuel with air before admission to engine cylinder is called carburetion.	1	Remember
2	What is the principle of carburetor? The principle of a carburetor is based on creating a proper air-fuel mixture for combustion in an internal combustion engine. It operates using the principles of fluid dynamics, particularly the Venturi effect, to mix air and fuel in the correct proportions.	1	Remember
3	Define abnormal combustion and its consequences? Abnormal combustion reveals itself in many ways. The two major abnormal combustion processes which are important in practice are knock and surface-ignition.	1	Remember
4	Write the desirable qualities for SI engine fuel? High Volatility,High Octane Number,Good Antiknock Quality ,Low Sulfur Content	1	Remember
5	Explain the type of vibration produced when auto ignition occurs. High Frequency: The vibrations produced by engine knocking are typically high-frequency vibrations. The sudden and uncontrolled combustion causes sharp pressure spikes within the cylinder. Intensity: These vibrations can be quite intense and produce a distinct "pinging" or "knocking" sound. The noise is a result of the shock waves created by the rapid and uneven combustion process.	2	Understand
6	What are the factors to be considered to obtain high thermal efficiency? Higher Compression Ratio: Increasing the compression ratio of the engine generally improves thermal efficiency. This is because higher	1	Remember


	compression ratios allow for more complete combustion of the fuel, extracting more energy from it. Complete Combustion: Ensuring complete combustion of the air-fuel mixture maximizes the energy extracted from the fuel. This can be achieved through optimal air-fuel ratios, proper mixing, and efficient ignition systems.		
7	What is a heterogeneous air-fuel mixture? In which engine is it used? A heterogeneous air-fuel mixture is a type of mixture in which the fuel and air are not evenly or uniformly mixed before entering the combustion chamber. This results in regions within the mixture that have varying air-to-fuel ratios, ranging from lean (more air, less fuel) to rich (more fuel, less air). Diesel Engines, Gasoline Direct Injection (GDI) Engines.	1	Remember
8	What are the different type's air-fuel mixtures? The stoichiometric mixture is the ideal air-fuel ratio where all the fuel is completely burned using all the oxygen in the air. Homogeneous Mixture, Heterogeneous Mixture, Stratified Mixture	2	Understand
9	What are the factors effecting carburetion? Air-Fuel Ratio, Temperature, Altitude, Engine Load, fuel type and fuel quality.	1	Remember
10	What is the Function of carburetor? The process of formation of a combustible fuel-air mixture by mixing the proper amount of fuel with air before admission to engine cylinder is called carburetion and the device which does this job is called a carburetor.	1	Remember
11	What are the general types of carburetors? Constant Choke Carburetor, Constant Vacuum Carburetor, Multiple Venturi Carburetor	1	Remember
12	What are the advantages of fuel-injection in an SI engine? Improved Fuel Efficiency, Enhanced Performance, Reduced Emissions, Improved Cold Start Performance, Consistency and Reliability.	1	Remember
13	Explain fuel supply systems. The following are the types of systems that have been used for the	1	Remember


	supply of fuel from the fuel tank to the engine cylinder. Gravity system Pressure system Pump system Fuel Injection System		
14	Define Electronic injection system. An electronic fuel injection (EFI) system is an advanced fuel delivery system used in internal combustion engines to ensure precise control of the air-fuel mixture. This system uses electronic controls and sensors to optimize fuel delivery for improved engine performance, fuel efficiency, and emissions control.	1	Remember
15	Define Combustion in CI engines. Combustion in compression ignition (CI) engines, also known as diesel engines, refers to the process where the air-fuel mixture is ignited by the high temperature achieved through compression of the air in the combustion chamber. This contrasts with spark ignition (SI) engines, where a spark plug ignites the air-fuel mixture.	1	Remember
Part B (16 marks)			
Q.No	Question	BT Level*	Competence[#]
1	Explain the factors that affect the process of carburetion & Types of Carburetors. Factors Affecting the Process of Carburetion 1. Air-Fuel Ratio: The efficiency of carburetion depends on the correct air-fuel mixture. Too rich (excess fuel) or too lean (excess air) mixtures can lead to poor engine performance and emissions issues. 2. Engine Speed: At different engine speeds, the air-fuel mixture needs to be adjusted. Carburetors usually have different circuits (idle, mid-range, and high-speed) to cater to varying speeds. 3. Altitude: Higher altitudes have lower air density, which affects the air-fuel mixture. Carburetors need to be adjusted or designed to compensate for changes in atmospheric pressure.	2	Understand

	4. Temperature: Cold temperatures can affect fuel vaporization, making the mixture richer. Carburetors often have heating mechanisms to address this issue. 5. Throttle Position: The position of the throttle affects how much air-fuel mixture is delivered to the engine. Carburetors adjust the mixture based on throttle position. 6. Engine Load: Varying engine loads require adjustments in the air-fuel ratio to maintain performance and efficiency. Types of Carburetors - Simple Carburetor: - Function: Basic design, often used in older or less complex engines. - Diagram: Typically includes a float chamber, venturi, throttle valve, and jet for fuel delivery. - Advantages: Simple design, low cost, easy maintenance. - Disadvantages: Less efficient fuel atomization, poor performance at varying loads and speeds. - Diaphragm Carburetor: - Function: Uses a diaphragm to regulate fuel flow, often found in small engines like those in lawnmowers. - Advantages: Good for varying loads, relatively simple. - Disadvantages: Limited application in modern vehicles. - Variable Venturi Carburetor: - Function: Adjusts the venturi size to maintain optimal air-fuel ratio across different engine speeds. - Advantages: Better fuel efficiency and performance. - Disadvantages: More complex, higher cost. - Electronic Carburetor: - Function: Uses electronic sensors to control the air-fuel mixture. - Advantages: Precision control, better fuel efficiency. - Disadvantages: Higher cost, complex design.		
2	Explain various classifications of an I.C. Engines. Classifications of Internal Combustion Engines (I.C. Engines) <i>Fig 1.9 Ideal p-V diagram of a two-stroke SI engine</i> I.C. Engines may be classified according to, a) Type of the fuel used as :	1	Remember


	(1) Petrol engine (2) Diesel engine (3) Gas engine (4) Bi-fuel engine (Two fuel engine) b) Nature of thermodynamic cycle as : (1) Otto cycle engine (2) Diesel cycle engine (3) Dual or mixed cycle engine c) Number of strokes per cycle as : (1) Four stroke engine (2) Two stroke engine d) Method of ignition as : (1) Spark ignition engine (S.I. engine) Mixture of air and fuel is ignited by electric spark. (2) Compression ignition engine (C.I. engine) The fuel is ignited as it comes in contact with hot compressed air. e) Method of cooling as : (1) Air cooled engine (2) Water cooled engine f) Speed of the engine as : (1) Low speed (2) Medium speed (3) High speed Petrol engine are high speed engines and diesel engines are low to medium speed engines g) Number of cylinder as : (1) Single cylinder engine (2) Multi cylinder engine h) Position of the cylinder as : (1) Inline engines (2) V – engines (3) Radial engines (4) Opposed cylinder engine (5) X – Type engine (6) H – Type Engine (7)U – Type Engine (8) Opposed piston engine (9) Delta Type Engine		
--	--	--	--

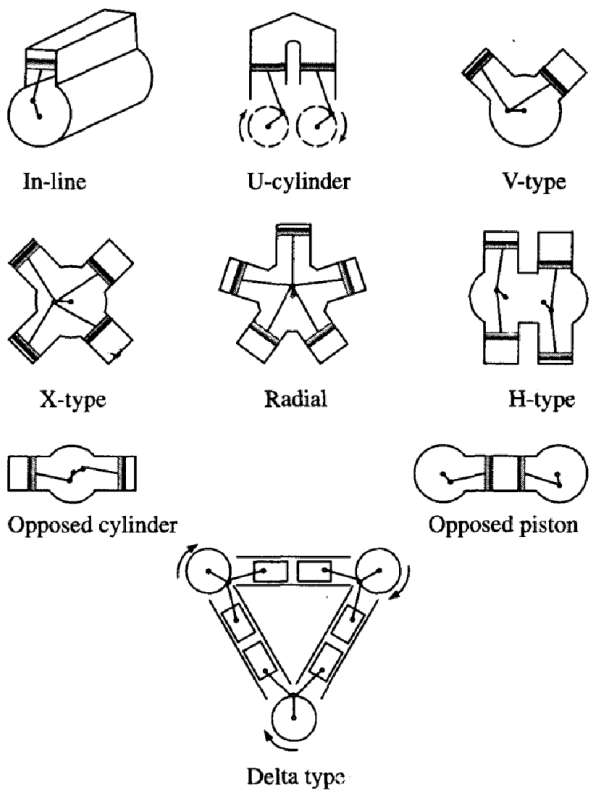	 The diagrams illustrate different engine cylinder configurations: In-line: A single cylinder with a piston and crankshaft. U-cylinder: Two cylinders arranged in a U-shape, sharing a common crankshaft. V-type: Two cylinders arranged in a V-shape, sharing a common crankshaft. X-type: Two cylinders arranged in an X-shape, sharing a common crankshaft. Radial: Multiple cylinders arranged radially around a central crankshaft. H-type: Two cylinders arranged in an H-shape, sharing a common crankshaft. Opposed cylinder: Two cylinders arranged horizontally opposite each other, sharing a common crankshaft. Opposed piston: Two cylinders arranged horizontally opposite each other, with pistons meeting in the center. Delta type: Three cylinders arranged in a triangular (delta) shape, sharing a common crankshaft.		
3	Brief explain about Injection systems with neat sketch. Air Injection System Fuel is forced into the cylinder by means of compressed air. It has good mixing of fuel with the air with resultant higher mean effective pressure It has the ability to utilize high viscosity (less expensive) fuels Solid Injection System In this system the liquid fuel is injected directly into the combustion chamber without the aid of compressed air. Solid injection systems can be classified into four types. Individual pump and nozzle system Unit injector system Common rail system Distributor system	2	Understand

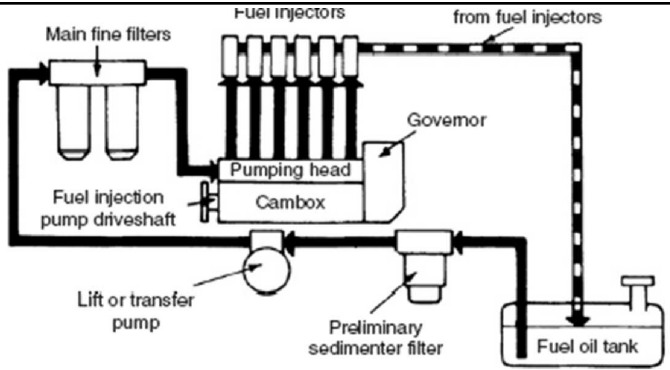	 Fuel filters: to prevent dust and abrasive particles from entering the pump and injectors thereby minimizing the wear and tear of the components Fuel feed pump: to supply fuel from the main fuel tank to the injection system. Injection pump: to meter and pressurize the fuel for injection, Governor: to ensure that the amount of fuel injected is in accordance with variation in load, Injector: to take the fuel from the pump and distribute it in the combustion chamber by atomizing it into fine droplets		
4	Explain briefly about Combustion in CI engines with neat sketch. Combustion in CI engines Only air is compressed through a high compression ratio (14:1 to 24:1) raising its temperature and pressure to a high value. Fuel is injected into the cylinders late in compression stroke through one or more injectors into highly compressed air in the combustion chamber. Injection time is usually about 20° of crankshaft rotation, starting at about 15° bTDC and ending about 5° aTDC. Combustion in a CI engine is an unsteady process occurring simultaneously at many spots in a very non-homogeneous mixture at a rate controlled by fuel injection. In addition to the swirl and turbulence of the air, a high injection velocity is needed to spread the fuel throughout the cylinder and cause it to mix with the air. After injection the fuel must go through a series of events to assure the proper combustion process: I. Atomization. Fuel drops break into very small droplets, the smaller the original drop size	1	Remember

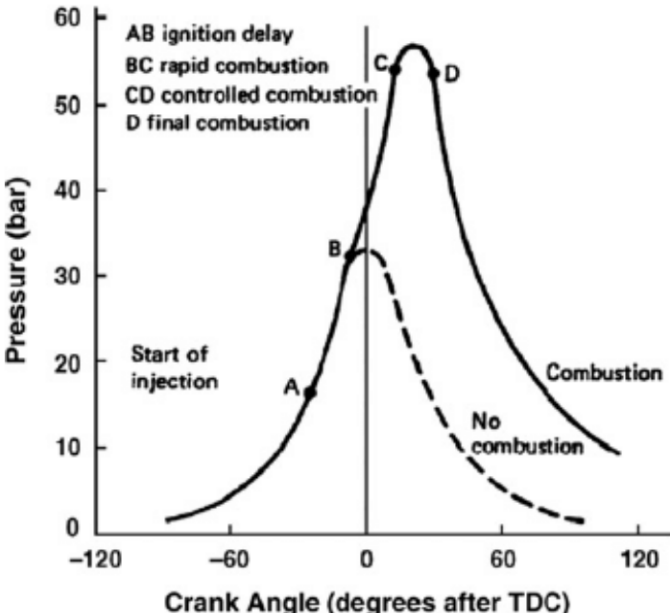	emitted by the injector, the quicker and more efficient will be this atomization process. II. Vaporization. The small droplets of liquid fuel evaporate to vapor. This occurs very quickly due to the hot air temperatures created by the high compression of CI engines. High air temperature needed for this vaporization process requires a minimum compression ratio in CI engines of about 12:1. About 90% of the fuel injected into the cylinder can be vaporized within 0.001 second after injection. III. Mixing. After vaporization, the fuel vapor must mix with air to form a mixture within the AF range which is combustible. This mixing is formed because of the high fuel injection velocity added to the swirl and turbulence in the cylinder air. Combustion can occur within the equivalence ratio limits of $\phi = 1.8$ (rich) and $\phi = 0.8$ (lean). The non-homogeneous distribution of air-fuel ratio that develops around the injected fuel jet. 		
5	Explain with neat sketch about simple carburetor. State its advantages and disadvantages. Carburetors are highly complex. Let us first understand the working principle of a simple or elementary carburetor that provides an air fuel mixture for cruising or normal range at a single speed. Later, other mechanisms to provide for the various special requirements like starting,	1	Remember

idling, variable load and speed operation and acceleration will be included. Figure shows the details of a simple carburetor. The simple carburetor mainly consists of a float chamber, fuel discharge nozzle and a metering orifice, a venturi, a throttle valve and a choke. The float and a needle valve system maintain a constant level of gasoline in the float chamber. If the amount of fuel in the float chamber falls below the designed level, the float goes down, thereby opening the fuel supply valve and admitting fuel. When the designed level has been reached, the float closes the fuel supply valve thus stopping additional fuel flow from the supply system. Float chamber is vented either to the atmosphere or to the upstream side of the venturi. During suction stroke air is drawn through the venturi.

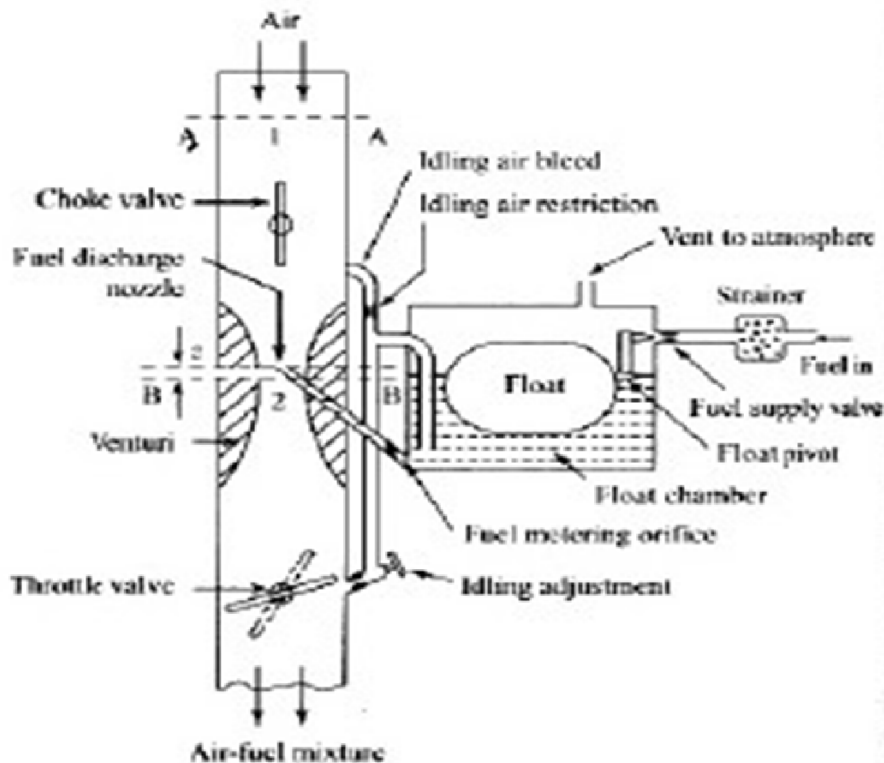

	As already described, venturi is a tube of decreasing cross-section with a minimum area at the throat, Venturi tube is also known as the choke tube and is so shaped that it offers minimum resistance to the air flow. As the air passes through the venturi the velocity increases reaching a maximum at the venturi throat. Correspondingly, the pressure decreases reaching a minimum. From the float chamber, the fuel is fed to a discharge jet, the tip of which is located in the throat of the venturi. Because of the differential pressure between the float chamber and the throat of the venturi, known as carburetor depression, fuel is discharged into the air stream. The fuel discharge is affected by the size of the discharge jet and it is chosen to give the required air-fuel ratio. The pressure at the throat at the fully open throttle condition lies between 4 to 5 cm of Hg, below atmospheric and seldom exceeds 8 cm Hg below atmospheric. To avoid overflow of fuel through the jet, the level of the liquid in the float chamber is maintained at a level slightly below the tip of the discharge jet. This is called the tip of the nozzle. The difference in the height between the top of the nozzle and the float chamber level is marked h in Fig		
6	Explain about the various parts of an I.C. Engine with neat sketch. Cylinder block – The cylinder block is the main supporting structure for the various components. The cylinder of a multicylinder engine are cast as a single unit, called cylinder block. The cylinder head is mounted on the cylinder block. The cylinder head and cylinder block are provided with water jackets in the case of water cooling or with cooling fins in the case of air cooling. b) Cylinder – As the name implies it is a cylindrical vessel or space in which the piston makes a reciprocating motion. The varying volume created in the cylinder during the operation of the engine is filled with the	1	Remember

	working fluid and subjected to different thermodynamic processes. The cylinder is supported in the cylinder block. c) Piston – It is a cylindrical component fitted into the cylinder forming the moving boundary of the combustion system. It fits perfectly (snugly) into the cylinder providing a gas-tight space with the piston rings and the lubricant. It forms the first link in transmitting the gas forces to the output shaft. d) Combustion chamber – The space enclosed in the upper part of the cylinder, by the cylinder head and the piston top during the combustion process, is called the combustion chamber. The combustion of fuel and the consequent release of thermal energy results in the building up of pressure in this part of the cylinder. e) Inlet manifold – The pipe which connects the intake system to the inlet valve of the engine and through which air or air-fuel mixture is drawn into the cylinder is called the inlet manifold. f) Exhaust manifold – The pipe which connects the exhaust system to the exhaust valve of the engine and through which the products of combustion escape into the atmosphere is called the exhaust manifold. g) Inlet and Exhaust valves – Valves are commonly mushroom shaped poppet type. They are provided either on the cylinder head or on the side of the cylinder for regulating the charge coming into the cylinder (inlet valve) and for discharging the products of combustion (exhaust valve) from the cylinder. h) Spark Plug – It is a component to initiate the combustion process in Spark-Ignition (SI) engines and is usually located on the cylinder head. i) Connecting Rod – It interconnects the piston and the crankshaft and transmits the gas forces from the piston to the crankshaft. The two ends of the connecting rod are called as small end and the big end (Fig.1.3). Small end is connected to the piston by gudgeon pin and the big end is connected to the crankshaft by crankpin. j) Crankshaft – It converts the reciprocating motion of the piston into useful rotary motion of the output shaft. Piston rings		
--	--	--	--


– Piston rings, fitted into the slots around the piston, provide a tight seal between the piston and the cylinder wall thus preventing leakage of combustion gases.

l) Gudgeon pin

– It links the small end of the connecting rod and the piston.


m) Camshaft

– The camshaft (not shown in the figure) and its associated parts control the opening

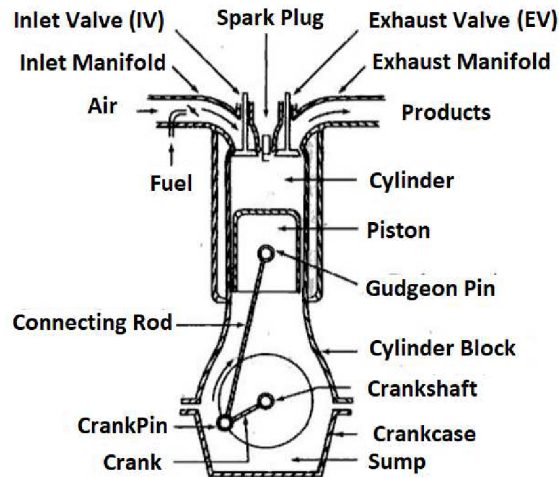

0

7	Explain briefly about Electronic injection system & what are the advantages and disadvantages of it?	2	Understand
---	--	---	------------

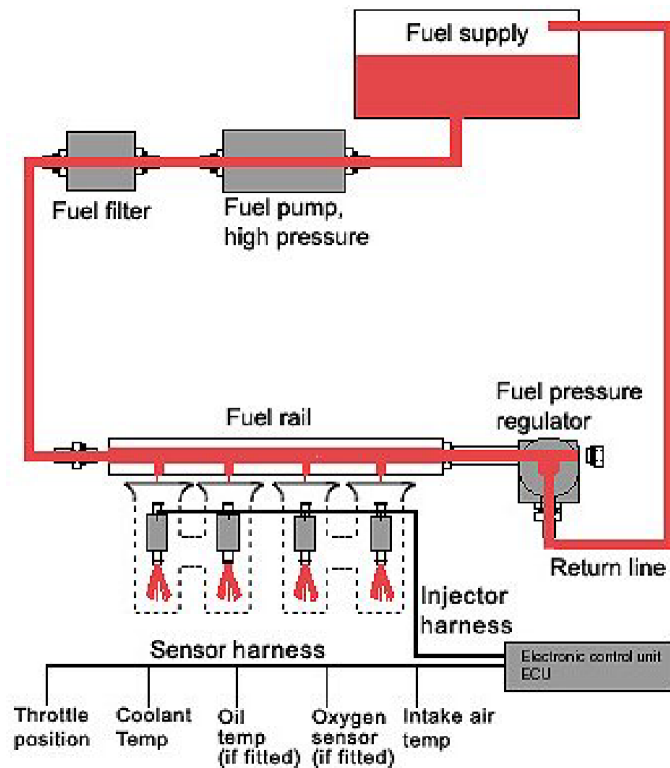


Electronic Control Unit

Control unit regulates the correct amount of fuel to be injected, depending on engine speed, intake pressure and engine temperature. When ignition is switched on, control unit receives its operating voltage directly from battery, via voltage supply relay. It also controls the fuel pump, which normally is provided with current from pump relay, only with engine running. A time switch, in control unit, allows fuel pump to run approximately 1 to 1.5 seconds after ignition is turned on. The control unit is connected to all sender units by a special wiring harness, coupled to a multiple plug. The control unit is usually located inside vehicle under the dash, under one of the seats or in the trunk.

Pressure Sensor

The pressure sensor is located in the engine compartment and is connected to the intake manifold by a vacuum hose. This sensor controls the basic amount of fuel to be injected, depending on pressure in the intake manifold and load on the engine

	Air Intake Temperature Sensor The air temperature sensor provides control unit with information about air temperature, so that control unit can increase the injection quantity as necessary at low intake air temperature. This compensation ceases when intake air temperature is greater than 68F (200C). Engine Temperature Sensor The engine temperature sensor provides the control unit with information about coolant temperature (cylinder head temperature on VW). This enables control unit to adapt injection interval and determine how long the cold start injector should remain open during cold starting. Triggering Contacts The triggering contacts are located in the distributor. They provide signals which determine when and to which cylinder fuel is to be injected. The contacts also supply information concerning engine speed to determine the amount of fuel that needs to be injected into the engine. Throttle Valve Switch The throttle valve switch is mounted on the throttle housing. This switch signals the control unit of throttle position. During deceleration, above 1500 RPM, throttle switch cuts fuel supply off and below 900 RPM, fuel supply is turned on. Auxiliary Air Valve During cold starts, the auxiliary air valve opens to allow additional air into the inlet duct. As engine heats up, a bi-metallic element expands and closes valve. At approximately 140F (800C) the auxiliary air pipe is completely closed by the valve.		
8	Explain about Electronic Fuel injection with diagram. Electronic Fuel Injection (EFI) is a sophisticated system used in internal combustion engines to control the delivery of fuel. It replaces traditional mechanical fuel injection systems with electronic controls to optimize fuel delivery for better performance, efficiency, and emissions. Here's a comprehensive overview of EFI:	1	Remember

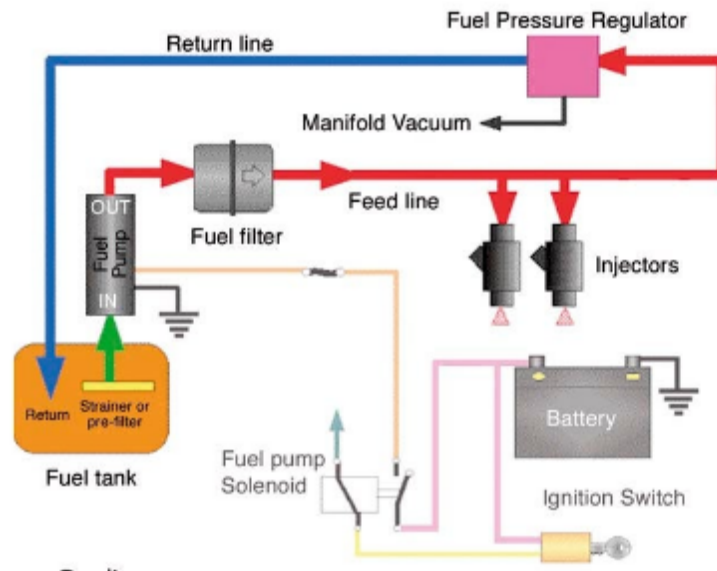

Key Components of EFI

1. Engine Control Unit (ECU):

- o **Function:** The ECU is the brain of the EFI system. It receives input from various sensors, processes the data, and sends commands to the fuel injectors to control fuel delivery.
- o **Components:** Includes a microprocessor, memory, and software for controlling engine functions.

2. Fuel Injectors:

- o **Function:** Injectors atomize and deliver the precise amount of fuel into the intake manifold or directly into the combustion chamber.
- o **Types:**
 - **Port Fuel Injectors:** Located in the intake manifold, delivering fuel to the air-fuel mixture before entering the combustion chamber.
 - **Direct Injectors:** Deliver fuel directly into the combustion chamber under high pressure.

3. Sensors:

- o **Mass Air Flow (MAF) Sensor:** Measures the amount of air entering the engine.
- o **Oxygen (O2) Sensors:** Monitor the level of oxygen in the exhaust gases to optimize fuel-air ratio.
- o **Throttle Position Sensor (TPS):** Measures the position of the throttle to adjust fuel delivery based on throttle opening.

	- o Coolant Temperature Sensor: Measures the engine temperature to adjust fuel delivery based on operating conditions. 4. Fuel Pump: - o Function: Pumps fuel from the tank to the fuel injectors under high pressure. 5. Fuel Pressure Regulator: - o Function: Maintains a consistent fuel pressure in the system to ensure proper fuel delivery. How EFI Works 1. Data Collection: - o Sensors collect data about engine parameters such as air flow, temperature, throttle position, and exhaust gases. 2. Data Processing: - o The ECU processes the data from sensors to determine the optimal amount of fuel needed for the current operating conditions. 3. Fuel Delivery: - o The ECU sends signals to the fuel injectors, which atomize and inject the precise amount of fuel into the intake manifold or combustion chamber. 4. Feedback and Adjustment: - o The ECU continuously monitors engine performance and adjusts the fuel delivery in real-time to maintain optimal performance, fuel efficiency, and emissions. Types of EFI Systems 1. Single-Point Fuel Injection (SPFI): - o Description: A single injector is used to deliver fuel to all cylinders through a central port. - o Applications: Used in older or less complex engines. 2. Multi-Point Fuel Injection (MPFI): - o Description: Each cylinder has its own injector, delivering fuel directly to the intake manifold. - o Applications: Common in modern gasoline engines for better performance and efficiency. 3. Direct Fuel Injection (DFI): - o Description: Fuel is injected directly into the combustion chamber under high pressure.		
--	---	--	--

	o Applications: Used in high-performance and modern engines to improve combustion efficiency and reduce emissions.		
UNIT 2: COMBUSTION IN SI AND CI ENGINES			
Introduction - Ignition - Stages of combustion-Normal and abnormal combustion- Factors affecting knock -Combustion chambers- Fuel spray behaviour – spray structure, spray penetration-and evaporation – air motion-stages of combustion-Factors affecting combustion-Direct and indirect injection systems –Combustion chambers.			
Part A (2 marks)			
Q.No	Question	BT Level*	Competence[#]
1	What is ignition delay period? Ignition Delay Period The ignition delay period in an internal combustion engine refers to the time interval between the start of fuel injection into the combustion chamber and the onset of combustion. This period is critical as it affects engine performance, fuel efficiency, and emissions.	1	Remember
2	Define Ignition Limits. Ignition Limits Ignition limits are the boundaries of fuel-air mixture compositions within which the mixture can ignite and sustain combustion. These limits are defined by the lean limit (minimum fuel concentration) and the rich limit (maximum fuel concentration).	1	Remember
3	Write the classification of combustion chamber in C.I engine? Classification of Combustion Chamber in C.I Engine Combustion chambers in compression ignition (C.I.) engines can be classified into: 1. Direct Injection (DI) Combustion Chambers: - o Open Combustion Chamber - o Toroidal or Bowl-in-Piston Chamber	1	Remember

	2. Indirect Injection (IDI) Combustion Chambers: - o Swirl Chamber - o Pre-Combustion Chamber - o Air-Cell Chamber		
4	What is the effect of detonation? Effect of Detonation Detonation, or knocking, in an engine can cause several detrimental effects, including: • Increased engine wear and tear • Higher combustion temperatures and pressures • Potential damage to pistons, cylinder walls, and head gaskets • Decreased efficiency and power output • Increased emissions	2	Understand
5	Explain Swirl Ratio. Swirl Ratio Swirl ratio is the measure of the rotational motion of air or the air-fuel mixture within the combustion chamber relative to the crankshaft speed. It is a dimensionless number indicating the intensity of the swirl, which helps in better mixing of air and fuel, leading to efficient combustion.	1	Remember
6	Define Turbulence. Turbulence Turbulence in an engine refers to the chaotic and irregular flow of the air-fuel mixture within the combustion chamber. It enhances the mixing of air and fuel, increases the rate of combustion, and improves overall engine performance.	1	Remember
7	Define abnormal Combustion. Abnormal Combustion	1	Remember

	Abnormal combustion refers to any deviation from the ideal combustion process, which can include knocking, pre-ignition, and incomplete combustion. These abnormalities can lead to reduced engine performance, increased emissions, and potential engine damage.		
8	What are the types of combustion chamber? Types of Combustion Chamber Combustion chambers can be classified into two main types: 1. Direct Injection (DI) Combustion Chambers 2. Indirect Injection (IDI) Combustion Chambers	2	Understand
9	Define Factors affecting knock. Factors Affecting Knock Several factors affect knock in engines: ● Compression ratio ● Engine temperature ● Air-fuel mixture ● Engine speed ● Engine load ● Fuel octane rating Combustion chamber design	1	Remember
10	List out the stages of combustion. Stages of Combustion The stages of combustion in a spark-ignition engine typically include: 1. Ignition Delay Period 2. Rapid Combustion 3. Controlled Combustion 4. Afterburning	1	Remember
11	List the advantages of indirect injection systems.	2	Understand

	Advantages of Indirect Injection Systems • Better fuel atomization • Smoother and quieter operation • Lower peak pressure in the combustion chamber • Easier starting, especially in cold conditions • Improved fuel-air mixing		
12	What is indirect injection type of combustion? Indirect Injection Type of Combustion In an indirect injection (IDI) system, fuel is injected into a pre-combustion chamber where it mixes with air and partially combusts before entering the main combustion chamber. This process helps in better mixing and more efficient combustion.	1	Remember
13	Define Normal combustion. Normal Combustion Normal combustion is the controlled and predictable burning of the air-fuel mixture in an engine's combustion chamber, leading to smooth and efficient engine operation. • Turbulence and swirl	1	Remember
14	What are the Factors affecting combustion? Factors Affecting Combustion • Air-fuel ratio • Ignition timing • Combustion chamber design • Engine speed and load • Fuel properties	1	Remember
15	What are the advantages and disadvantages of combustion chamber? Advantages and Disadvantages of Combustion Chambers	1	Remember

	Advantages: ● Efficient fuel combustion ● Improved engine performance ● Reduced emissions ● Enhanced fuel economy Disadvantages: ● Complexity in design ● Potential for abnormal combustion ● Maintenance requirements ● Higher manufacturing costs in some designs		
--	---	--	--

Part B (16 marks)

Q.No	Question	BT Level*	Competence[#]
1	Bring out clearly the process of combustion in CI engines and also explain the various stages of combustion. Combustion Process in CI (Compression Ignition) Engines In a Compression Ignition (CI) engine, commonly known as a diesel engine, combustion occurs through the process of compressing the air-fuel mixture to such high temperatures and pressures that the fuel ignites spontaneously. This process differs significantly from Spark Ignition (SI) engines, where combustion is initiated by a spark plug. Steps in the Combustion Process Intake Stroke: ○ Process: Fresh air is drawn into the cylinder through the intake valve. ○ Purpose: To fill the cylinder with air that will be compressed and mixed with fuel. Compression Stroke: ○ Process: The intake valve closes, and the piston moves upward, compressing the air in the cylinder. ○ Purpose: The compression raises the temperature and pressure of the air to prepare it for fuel injection. Fuel Injection: ○ Process: At the end of the compression stroke, fuel is injected into the high-temperature, high-pressure air in the cylinder.	2	Understand


	○ Purpose: The injected fuel atomizes into tiny droplets, which mix with the compressed air. 4. Combustion: ○ Process: The fuel spontaneously ignites due to the high temperature and pressure of the compressed air. ○ Purpose: The rapid combustion generates a high-pressure and high-temperature gas, which forces the piston downward. 5. Power Stroke: ○ Process: The high-pressure gas pushes the piston downward, converting the thermal energy into mechanical work. ○ Purpose: This is the stroke where the engine performs work, generating power. 6. Exhaust Stroke: ○ Process: The exhaust valve opens, and the piston moves upward, expelling the spent gases from the cylinder. ○ Purpose: To clear the cylinder of exhaust gases and prepare for the next intake stroke. Stages of Combustion in CI Engines 1. Ignition Delay Period: ○ Definition: The time interval between the start of fuel injection and the start of combustion. ○ Characteristics: During this period, the injected fuel undergoes atomization and mixing with the compressed air. The delay depends on fuel properties, temperature, and pressure. 2. Premixed Combustion: ○ Definition: Combustion of the fuel that has mixed with the air before reaching the end of the ignition delay period. ○ Characteristics: Occurs when the fuel-air mixture reaches a critical temperature and pressure, causing it to ignite and burn rapidly. This phase is characterized by a rapid rise in pressure and temperature. 3. Diffusion Combustion: ○ Definition: The combustion of the fuel that occurs after the initial premixed combustion phase, as the remaining fuel continues to mix with the hot air. ○ Characteristics: Fuel continues to burn as it diffuses into the high-temperature, high-pressure air, leading to a more sustained combustion phase. This phase is marked by a slower and more controlled release of energy. 4. Combustion Duration:		
--	--	--	--

	○ Definition: The total time during which combustion occurs in the cylinder. ○ Characteristics: Includes both the premixed and diffusion combustion phases. The duration affects the engine's performance, efficiency, and emissions. 5. End of Combustion: ○ Definition: The point at which the combustion process is complete, and the majority of the fuel has been burned. ○ Characteristics: Typically coincides with the end of the power stroke. After this point, the pressure in the cylinder starts to decrease as the piston moves down.		
2	Explain the various processes involved in Otto cycle with P-V & T-S diagrams. The Otto cycle is the thermodynamic cycle that describes the functioning of a Spark Ignition (SI) engine. It consists of two adiabatic (isentropic) processes and two isochoric (constant volume) processes. The cycle is composed of four main processes: intake, compression, power, and exhaust. Let's break down each process and provide P-V (Pressure-Volume) and T-S (Temperature-Entropy) diagrams for clarity. Processes in the Otto Cycle 1. Intake Stroke (Process 1-2) ○ Description: The intake valve opens, and the piston moves down, drawing in a mixture of air and fuel. ○ P-V Diagram: The volume increases while the pressure remains nearly constant. ○ T-S Diagram: The temperature and entropy increase as the air-fuel mixture is drawn into the cylinder. 2. Compression Stroke (Process 2-3) ○ Description: The intake valve closes, and the piston moves up, compressing the air-fuel mixture to a high pressure and temperature. ○ P-V Diagram: The volume decreases, and the pressure increases significantly. ○ T-S Diagram: The temperature increases while the entropy remains nearly constant, as the process is adiabatic. 3. Power Stroke (Process 3-4)	2	Understand

	- o Description: The spark plug ignites the compressed air-fuel mixture, causing a rapid increase in pressure and temperature. The piston is pushed down due to the combustion. - o P-V Diagram: The volume increases while the pressure drops after the peak. - o T-S Diagram: The temperature increases sharply while the entropy also increases, reflecting the heat added to the system. 4. Exhaust Stroke (Process 4-1) - o Description: The exhaust valve opens, and the piston moves up, expelling the spent gases from the cylinder. - o P-V Diagram: The volume decreases while the pressure remains nearly constant. - o T-S Diagram: The temperature decreases as the spent gases are expelled, and entropy remains nearly constant. P-V Diagram of the Otto Cycle ● Process 1-2: Isobaric (constant pressure) intake, leading to an increase in volume. ● Process 2-3: Adiabatic compression, leading to a decrease in volume and an increase in pressure. ● Process 3-4: Isentropic (constant entropy) expansion due to combustion, leading to an increase in volume and a decrease in pressure. ● Process 4-1: Isobaric exhaust, leading to a decrease in volume. P-V Diagram:		
--	---	--	--

	1-2: Isentropic compression 2-3: constant volume heat addition 3-4: Isentropic Expansion 4-1: Constant volume heat rejection P-V and T-S Diagram of Otto Cycle Region 1-2: Intake • Region 2-3: Compression • Region 3-4: Power Stroke • Region 4-1: Exhaust T-S Diagram of the Otto Cycle • Process 1-2: Isochoric (constant volume) heating, with an increase in temperature and entropy. • Process 2-3: Adiabatic compression, increasing temperature with nearly constant entropy. • Process 3-4: Isochoric heating due to combustion, increasing temperature and entropy. • Process 4-1: Adiabatic expansion, reducing temperature and entropy. T-S Diagram: • Region 1-2: Intake • Region 2-3: Compression • Region 3-4: Power Stroke • Region 4-1: Exhaust		
3	Discuss about the working of a 4 stroke petrol engine with neat sketch? A 4-stroke petrol engine, also known as a 4-stroke spark ignition (SI) engine, operates through a four-stage cycle to convert fuel into mechanical energy. Each stroke corresponds to one of the four main processes in the engine's cycle: intake, compression, power, and	1	Remember

exhaust. Here's a detailed explanation of each stage, along with the overall working of the engine.

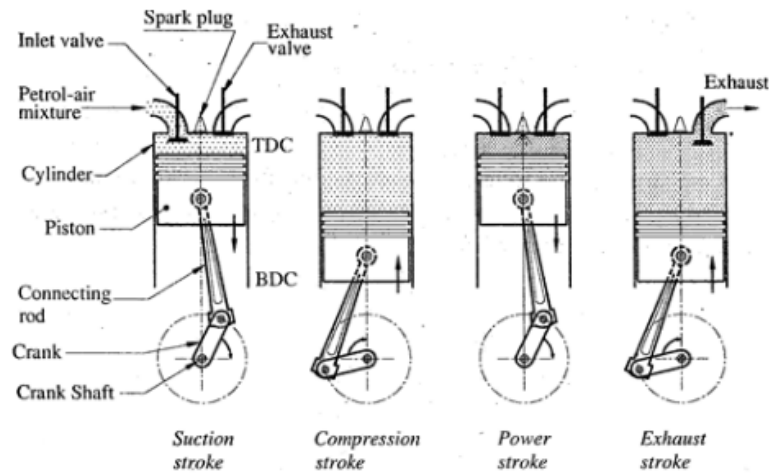

Working of a 4-Stroke Petrol Engine

1. Intake Stroke


- **Description:**
 - The intake valve opens while the exhaust valve remains closed.
 - The piston moves down the cylinder from the top dead center (TDC) to the bottom dead center (BDC).
- **Process:**
 - As the piston moves down, the volume of the cylinder increases, creating a vacuum.
 - This vacuum draws in a mixture of air and fuel from the intake manifold into the cylinder.
- **Objective:**
 - To fill the cylinder with the air-fuel mixture necessary for combustion.

2. Compression Stroke

- **Description:**
 - Both the intake and exhaust valves are closed.
 - The piston moves up from the BDC to the TDC.
- **Process:**
 - As the piston moves up, it compresses the air-fuel mixture.

	○ The compression raises the pressure and temperature of the mixture, making it more combustible. ● Objective: ○ To prepare the air-fuel mixture for efficient combustion by increasing its temperature and pressure. 3. Power Stroke (Combustion Stroke) ● Description: ○ Both the intake and exhaust valves remain closed. ○ The piston reaches the TDC, where the spark plug ignites the compressed air-fuel mixture. ● Process: ○ The spark plug produces a spark that ignites the compressed mixture. ○ The combustion of the fuel-air mixture generates a rapid expansion of gases. ○ This expansion creates high pressure that forces the piston down from TDC to BDC. ● Objective: ○ To convert the chemical energy of the fuel into mechanical energy, producing work. 4. Exhaust Stroke ● Description: ○ The exhaust valve opens while the intake valve remains closed. ○ The piston moves up from the BDC to the TDC. ● Process: ○ As the piston moves up, it pushes the spent exhaust gases out of the cylinder through the open exhaust valve. ● Objective: ○ To clear the cylinder of exhaust gases, making room for a new intake of air-fuel mixture for the next cycle.		
4	Brief explain about the differences between theoretical and actual Valve timing diagram of I.C.Engines? The valve timing diagram of an internal combustion engine (IC engine) represents the timing of the opening and closing of the intake and exhaust valves throughout the engine cycle. It is essential for understanding engine performance and efficiency. There are two types of valve timing diagrams: theoretical and actual. Here's a brief explanation of the differences between them:	1	Remember

Theoretical & Actual Valve Timing Diagram For 4-Stroke Diesel Engine

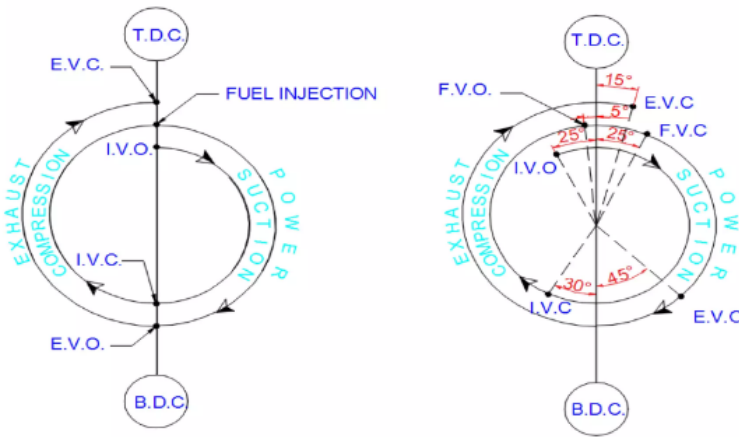

Theoretical Valve Timing Diagram

Definition: The theoretical valve timing diagram is an idealized representation of the valve timings based on the engine's design and intended operation. It assumes perfect conditions without considering real-world factors.

Characteristics:

- **Ideal Conditions:** Assumes ideal valve timing with no mechanical losses, friction, or delays.
- **Fixed Timings:** The timing of valve events (opening and closing) is set according to theoretical calculations or design specifications.
- **Predictive:** Provides a basis for understanding the designed performance of the engine.


Diagram Example:

- **Intake Valve Open:** Starts before TDC of the exhaust stroke and closes after BDC of the intake stroke.
- **Exhaust Valve Open:** Starts before BDC of the power stroke and closes after TDC of the exhaust stroke.
- The diagram is usually symmetrical and assumes constant engine speed.

Actual Valve Timing Diagram

	Definition: The actual valve timing diagram reflects the real-world operation of the engine, taking into account the practical factors that affect valve timing, such as mechanical imperfections, wear, and dynamic behavior. Characteristics: ● Real Conditions: Includes factors like valve overlap, mechanical delays, spring characteristics, and engine speed variations. ● Variable Timings: The timing of valve events may differ from theoretical values due to practical constraints and adjustments. ● Empirical Data: Based on real engine tests and measurements, providing a more accurate representation of engine performance. Diagram Example: ● Intake Valve Open: May start slightly later or close slightly earlier than the theoretical values due to real-world factors. ● Exhaust Valve Open: Similar variations compared to theoretical timings, with potential overlap and delays.		
5	Explain the working of a 4 stroke diesel engine with neat sketch. A 4-stroke diesel engine operates on the Diesel cycle, where air is compressed to high temperatures and pressures, and fuel is injected to ignite spontaneously. The engine performs work through four distinct strokes: intake, compression, power, and exhaust. Here's a detailed explanation of each stroke, along with a neat sketch. Working of a 4-Stroke Diesel Engine 1. Intake Stroke ● Description: ○ The intake valve opens, and the exhaust valve remains closed. ○ The piston moves from the top dead center (TDC) to the bottom dead center (BDC). ● Process: ○ As the piston moves down, fresh air is drawn into the cylinder due to the decrease in volume.	1	Remember

	● Objective: ○ To fill the cylinder with air that will be compressed and ignited in the following strokes. 2. Compression Stroke ● Description: ○ Both intake and exhaust valves are closed. ○ The piston moves up from the BDC to the TDC. ● Process: ○ The air is compressed to a very high pressure and temperature, increasing its density. ○ This compression is adiabatic (no heat exchange), meaning temperature rises significantly. ● Objective: ○ To prepare the air for combustion by increasing its temperature and pressure. 3. Power Stroke (Combustion Stroke) ● Description: ○ Both intake and exhaust valves remain closed. ○ At the end of the compression stroke, fuel is injected into the high-temperature compressed air. ● Process: ○ The fuel atomizes and ignites spontaneously due to the high temperature. ○ Combustion rapidly increases the pressure of the air, forcing the piston down from TDC to BDC. ● Objective: ○ To convert the chemical energy of the fuel into mechanical energy and produce work. 4. Exhaust Stroke ● Description: ○ The exhaust valve opens, and the intake valve remains closed. ○ The piston moves up from the BDC to the TDC. ● Process: ○ The piston pushes the spent exhaust gases out of the cylinder through the open exhaust valve. ● Objective:		
--	---	--	--

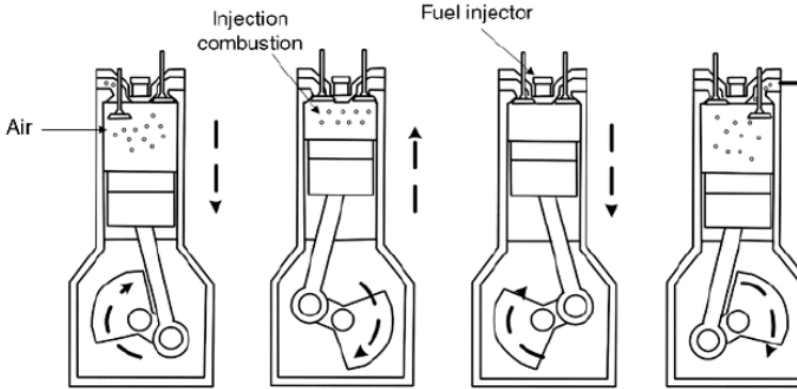	○ To clear the cylinder of exhaust gases and prepare for the next intake stroke. Neat Sketch of a 4-Stroke Diesel Engine Here's a simplified sketch illustrating the four strokes of the engine cycle: Four-stroke cycle (Diesel)  ● Intake Stroke: The piston moves down (from TDC to BDC), drawing air into the cylinder. The intake valve is open, and the exhaust valve is closed. ● Compression Stroke: The piston moves up (from BDC to TDC), compressing the air. Both valves are closed. ● Power Stroke: At the end of compression, fuel is injected into the cylinder, causing combustion. The piston is forced down (from TDC to BDC) by the expanding gases. ● Exhaust Stroke: The piston moves up (from BDC to TDC) to expel the exhaust gases. The exhaust valve is open, and the intake valve is closed.		
6	Explain briefly about Direct and indirect injection systems. In internal combustion engines, fuel injection systems are critical for delivering the right amount of fuel into the combustion chamber. There are two primary types of injection systems used: Direct Injection and Indirect Injection. Here's a brief explanation of each: Direct Injection System Description: ● In a Direct Injection (DI) system, fuel is injected directly into the combustion chamber.	1	Remember

	• This method allows for precise control of the fuel-air mixture and combustion process. Operation: • Injection Timing: Fuel is injected during the compression stroke or just before ignition, directly into the compressed air in the combustion chamber. • Advantages: - o Improved Efficiency: Better fuel atomization and mixing with air, leading to more complete combustion and higher efficiency. - o Increased Power: Enhanced power output due to more efficient combustion. - o Lower Emissions: Reduced fuel consumption and emissions, especially CO and HC, due to more complete combustion. • Disadvantages: - o Complexity: More complex and expensive system due to high-pressure fuel pumps and injectors. - o Potential for Carbon Deposits: Increased risk of carbon buildup on intake valves because the fuel does not wash over them. Applications: • Commonly used in modern gasoline and diesel engines for better performance and fuel economy. Indirect Injection System Description: • In an Indirect Injection (IDI) system, fuel is injected into a pre-chamber or intake manifold rather than directly into the combustion chamber. • The fuel mixes with air in the pre-chamber or manifold before entering the main combustion chamber. Operation: • Injection Timing: Fuel is injected into a pre-chamber or intake manifold during the intake stroke. The air-fuel mixture is then drawn into the main combustion chamber. • Advantages:		
--	--	--	--

	- o Simplicity: Generally simpler and less expensive to manufacture compared to direct injection systems. - o Lower Risk of Carbon Deposits: Fuel washes over the intake valves, reducing the likelihood of carbon buildup. • Disadvantages: - o Lower Efficiency: Less efficient combustion compared to direct injection due to less precise fuel-air mixing. - o Reduced Power: Potentially lower power output due to less efficient combustion. - o Higher Emissions: May produce higher levels of CO and HC emissions due to incomplete combustion. Applications: • Commonly used in older or less performance-focused engines, as well as some diesel engines where the technology is simpler and cost-effective.		
7	Write about the various processes involved in Dual cycle with P-V & T-S diagrams? The Dual cycle, also known as the Mixed Cycle, is a thermodynamic cycle that combines elements of both the Otto cycle (constant volume) and the Diesel cycle (constant pressure). It is often used to describe engines that operate with a combination of both constant volume and constant pressure processes, such as some modern diesel engines with variable valve timing. Processes Involved in the Dual Cycle The Dual cycle includes the following key processes: 1. Intake Stroke (Process 1-2) - o Description: The intake valve opens, and the piston moves down from the top dead center (TDC) to the bottom dead center (BDC). - o Process: The volume increases while the pressure remains nearly constant. - o Objective: To draw in the air-fuel mixture into the cylinder. 2. Compression Stroke (Process 2-3) - o Description: Both the intake and exhaust valves are closed, and the piston moves up from BDC to TDC.	2	Understand

	- o Process: The air-fuel mixture is compressed, leading to an increase in pressure and temperature. The compression is typically adiabatic. - o Objective: To increase the pressure and temperature of the air-fuel mixture in preparation for combustion. 3. Combustion Stroke (Process 3-4) - o Description: Combustion occurs after the piston reaches TDC. Fuel is injected and ignited, causing a rapid increase in pressure. - o Process: The pressure increases at nearly constant volume (similar to the Otto cycle) initially, followed by a constant pressure process (similar to the Diesel cycle) as the combustion continues. - o Objective: To maximize the work done by the expanding gases during combustion. 4. Expansion Stroke (Process 4-5) - o Description: The piston moves down from TDC to BDC while the exhaust valve remains closed. - o Process: The gases expand at nearly constant pressure, which provides the power stroke. - o Objective: To convert the thermal energy of the gases into mechanical work. 5. Exhaust Stroke (Process 5-1) - o Description: The exhaust valve opens, and the piston moves up from BDC to TDC. - o Process: The spent gases are expelled from the cylinder, decreasing the volume while pressure remains nearly constant. - o Objective: To clear the cylinder of exhaust gases and prepare for the next intake stroke. P-V (Pressure-Volume) Diagram The P-V diagram illustrates the changes in pressure and volume during the Dual cycle: ● Process 1-2: Isobaric intake, where the volume increases at nearly constant pressure. ● Process 2-3: Adiabatic compression, where both volume and pressure increase. ● Process 3-4: Initial constant volume combustion (similar to Otto cycle), followed by constant pressure expansion (similar to Diesel cycle). ● Process 4-5: Isobaric expansion, where the volume increases at nearly constant pressure.		
--	---	--	--

- **Process 5-1:** Isobaric exhaust, where the volume decreases at nearly constant pressure.

P-V Diagram:

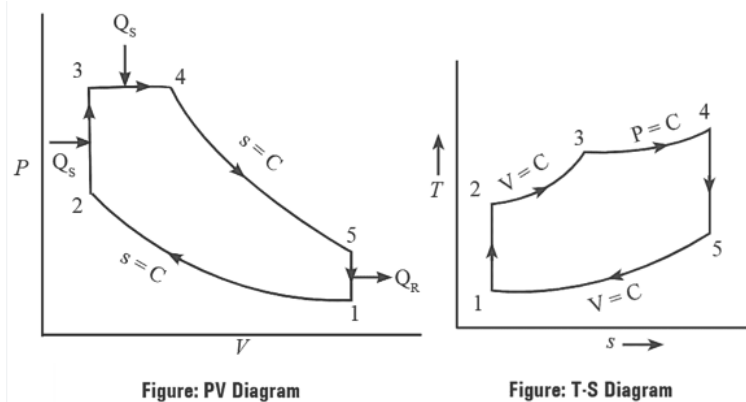


Figure: PV Diagram

Figure: T-S Diagram

V1

V2

- **Region 1-2:** Intake
- **Region 2-3:** Compression
- **Region 3-4:** Combustion (initially constant volume, then constant pressure)
- **Region 4-5:** Expansion
- **Region 5-1:** Exhaust


T-S (Temperature-Entropy) Diagram

The T-S diagram shows the temperature and entropy changes throughout the cycle:

- **Process 1-2:** Isochoric heating, with an increase in temperature and entropy.
- **Process 2-3:** Adiabatic compression, increasing temperature while entropy remains nearly constant.
- **Process 3-4:** Initially constant volume combustion (increase in temperature and entropy), followed by constant pressure combustion (further increase in entropy).
- **Process 4-5:** Isobaric expansion, with a decrease in temperature but an increase in entropy.
- **Process 5-1:** Isochoric cooling, where the temperature decreases and entropy remains nearly constant.

T-S Diagram:

- **Region 1-2:** Intake
- **Region 2-3:** Compression

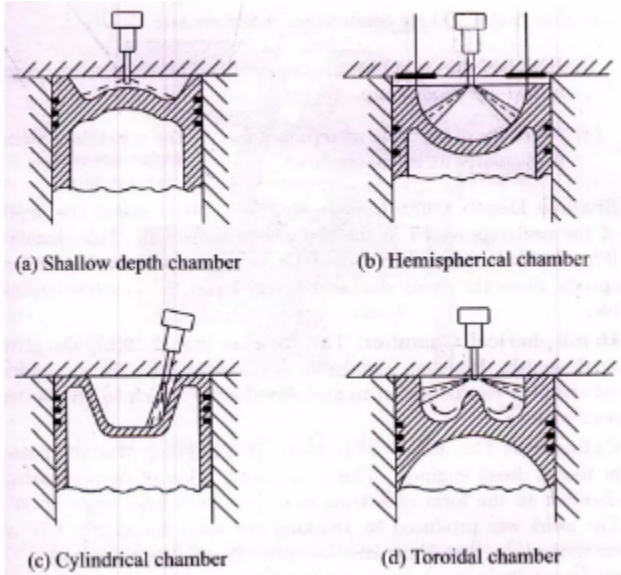	● Region 3-4: Combustion (initially constant volume, then constant pressure) ● Region 4-5: Expansion ● Region 5-1: Exhaust		
8	Explain briefly about types of combustion chamber with neat sketch. Combustion chambers in internal combustion engines are designed to facilitate efficient combustion of the air-fuel mixture. Different types of combustion chambers have distinct shapes and configurations that affect engine performance, efficiency, and emissions. Here's a brief overview of the main types of combustion chambers:  (a) Shallow depth chamber (b) Hemispherical chamber (c) Cylindrical chamber (d) Toroidal chamber 1. Open Combustion Chamber Description: ● The open combustion chamber has a simple, open design with no specific pre-chamber or additional features. ● The air-fuel mixture is introduced directly into the main combustion chamber. Characteristics: ● Design: Directly open to the cylinder, with minimal or no separation between the intake and combustion areas.	1	Remember

	● Applications: Common in older gasoline engines and some modern engines with simple designs. Advantages: ● Simplicity: Simple design with fewer components. ● Ease of Manufacturing: Easier and less costly to manufacture. Disadvantages: ● Lower Efficiency: Less efficient mixing of air and fuel, leading to incomplete combustion and higher emissions. ● Higher Emissions: Potentially higher levels of unburned hydrocarbons and carbon monoxide. 2. Hemisphere Combustion Chamber Description: ● The hemisphere combustion chamber has a hemispherical shape, creating a space with a dome-like structure. ● Often used in combination with a wedge-shaped piston crown to enhance turbulence and mixing. Characteristics: ● Design: The chamber is shaped like a half-sphere, allowing for better mixing of the air-fuel mixture. ● Applications: Common in many modern gasoline engines. Advantages: ● Improved Efficiency: Better air-fuel mixing due to enhanced turbulence. ● Higher Power Output: More efficient combustion can lead to increased engine power. Disadvantages: ● Complexity: More complex design and manufacturing compared to open chambers. ● Potential for Knock: Can be more prone to knocking (pre-ignition) if not properly managed.		
--	--	--	--

	3. Pre-Chamber Combustion Chamber Description: • A pre-chamber combustion chamber has a small, separate chamber (pre-chamber) that is connected to the main combustion chamber. • The air-fuel mixture is first ignited in the pre-chamber, then the resulting gases are directed into the main chamber. Characteristics: • Design: The pre-chamber is located adjacent to or within the main combustion chamber, allowing for better mixing and ignition control. • Applications: Used in some diesel engines and advanced gasoline engines. Advantages: • Improved Combustion: Better mixing and more controlled combustion process. • Reduced Emissions: More complete combustion can lead to lower emissions. Disadvantages: • Complexity: More complex design with additional components. • Cost: Increased manufacturing costs due to the additional chamber and mechanisms. 4. Swirl Combustion Chamber Description: • The swirl combustion chamber is designed to create a swirling motion of the air-fuel mixture within the chamber. • This design promotes better mixing and efficient combustion. Characteristics: • Design: Features inlet ports or shapes that induce a swirling motion in the combustion chamber.		
--	--	--	--

	● Applications: Common in modern diesel engines and some advanced gasoline engines. Advantages: ● Enhanced Mixing: Improved air-fuel mixing due to the swirling action. ● Better Combustion Efficiency: More complete combustion and reduced emissions. Disadvantages: ● Complexity: Design and manufacturing can be more complex. ● Potential for Noise: Swirling action can increase engine noise.		
UNIT 3: ENGINE LUBRICATION AND COOLING			
Lubrication of engine components, Lubrication system – wet sump and dry sump, crankcase ventilation, Types of cooling systems – liquid and air cooled, comparison of liquid and air cooled systems.			
Part A (2 marks)			
Q.No	Question	BT Level*	Competence[#]
1	How to determine Engine Friction? Determining Engine Friction Engine friction can be determined by measuring the difference between the indicated power (power generated inside the combustion chamber) and the brake power (power available at the crankshaft). This is typically done using a dynamometer and the following methods: ● Motoring Test: Running the engine without fuel and measuring the power required to overcome friction. ● Friction Mean Effective Pressure (FMEP): Calculated using empirical formulas and engine parameters. ● Willans Line Method: Extrapolating power measurements at various loads to find friction losses.	2	Understand
2	Define Total Engine Friction.	1	Remember

	Total Engine Friction Total engine friction encompasses all the resistive forces within an engine that oppose the motion of its components. This includes friction between moving parts (pistons, crankshaft, camshaft, etc.), pumping losses, and accessory drive losses.		
3	What is the purpose of Lubricants? Purpose of Lubricants The primary purposes of lubricants in an engine are: ● Reducing Friction: Minimizing the resistance between moving parts. ● Cooling: Absorbing and dissipating heat generated by friction. ● Cleaning: Removing contaminants and debris from engine parts. ● Protecting: Forming a protective film to prevent corrosion and wear. ● Sealing: Helping to seal gaps between components to prevent leakage.	2	Understand
4	Define Properties of lubricants. Properties of Lubricants Key properties of lubricants include: ● Viscosity: Resistance to flow, which affects lubrication and cooling. ● Viscosity Index: Measure of how viscosity changes with temperature. ● Thermal Stability: Ability to resist breakdown at high temperatures. ● Oxidation Stability: Resistance to reacting with oxygen at high temperatures. ● Corrosion Protection: Ability to prevent rust and corrosion. ● Detergent Properties: Ability to clean and suspend contaminants.	1	Remember


5	What is the need of cooling system? Need for Cooling System The cooling system is necessary to: ● Maintain Optimal Operating Temperature: Prevent overheating and ensure efficient engine performance. ● Prevent Engine Damage: Avoid damage to engine components caused by excessive heat. ● Improve Efficiency: Ensure combustion efficiency and reduce fuel consumption. ● Extend Engine Life: Reduce thermal stress on engine parts.	2	Understand
6	Define types of lubricants. Types of Lubricants Lubricants can be classified into: ● Mineral Oils: Derived from crude oil, used in many standard applications. ● Synthetic Oils: Chemically engineered for specific properties and performance. ● Semi-Synthetic Oils: Blend of mineral and synthetic oils for balanced performance. ● Bio-based Oils: Made from renewable resources, environmentally friendly.	1	Remember
7	Define crank case ventilation. Crankcase Ventilation Crankcase ventilation is the process of removing gases (blow-by gases) that leak from the combustion chamber into the crankcase. It helps maintain pressure balance, prevents oil contamination, and reduces emissions. Systems include: ● Positive Crankcase Ventilation (PCV): Uses engine vacuum to draw gases back into the intake manifold for re-combustion. ● Open Crankcase Ventilation (OCV): Vents gases directly to the atmosphere (less common due to environmental regulations).	1	Remember
8	What is the necessity of engine cooling?	2	Understand

	Necessity of Engine Cooling Engine cooling is necessary to: ● Prevent Overheating: Avoid damage to engine components. ● Maintain Efficiency: Ensure optimal combustion and performance. ● Protect Lubricants: Prevent breakdown of lubricating oil due to high temperatures.		
9	Define Heat transfer. Heat Transfer Heat transfer is the process of thermal energy moving from a hotter object to a cooler one. It occurs through: ● Conduction: Direct transfer through a material. ● Convection: Transfer through a fluid (liquid or gas). ● Radiation: Transfer through electromagnetic waves.	1	Remember
10	Define Air cooling system. Air Cooling System An air cooling system uses air to dissipate heat from the engine. Components typically include cooling fins on the engine block and cylinder head, and sometimes a fan to increase airflow. It's commonly used in motorcycles, lawnmowers, and small engines.	1	Remember
11	Define water cooling. Water Cooling A water cooling system uses a liquid coolant (usually water mixed with antifreeze) to absorb and transfer heat from the engine. Key components include: ● Radiator: Exchanges heat with the air. ● Water Pump: Circulates the coolant. ● Thermostat: Regulates the coolant flow based on temperature.	1	Remember

	Coolant: The liquid that absorbs heat from the engine.		
12	What is the need of oil filters? Need for Oil Filters Oil filters are necessary to: ● Remove Contaminants: Filter out particles, dirt, and debris from the oil. ● Protect Engine Components: Prevent abrasive wear by ensuring clean oil. ● Maintain Oil Quality: Extend the life and effectiveness of the lubricating oil.	2	Understand
13	Define Mist Lubrication system. Mist Lubrication System In a mist lubrication system, a fine mist of oil is created and delivered to the engine components. This system is often used in two-stroke engines and small air-cooled engines. It provides lubrication with minimal oil consumption.	1	Remember
14	What are the Components of water cooling system? Components of Water Cooling System The water cooling system typically includes: ● Radiator: Transfers heat from coolant to air. ● Water Pump: Circulates coolant through the system. ● Thermostat: Controls coolant flow based on engine temperature. ● Coolant Reservoir: Stores excess coolant. ● Fan: Increases airflow through the radiator. ● Hoses and Piping: Connects components and channels coolant.	1	Remember
15	Define dry sump. Dry Sump A dry sump system is an engine lubrication system where oil is stored in an external tank instead of the engine sump. Advantages include:	1	Remember

	● Improved Lubrication: Consistent oil supply regardless of engine orientation. ● Reduced Oil Aeration: Less air mixed with oil, enhancing lubrication. ● Lower Center of Gravity: Allows engine placement lower in the vehicle. Better Cooling: External tank can be larger and better cooled.		
Part B (16 marks)			
Q.No	Question	BT Level*	Competence[#]
1	Explain briefly About Lubrication of engine components with neat sketch. Engine lubrication is crucial for the smooth operation, longevity, and efficiency of an internal combustion engine. It involves the application of lubricant (usually oil) to various engine components to reduce friction, prevent wear, and ensure proper function. Key Functions of Engine Lubrication Reducing Friction: - o Purpose: Minimizes friction between moving parts, reducing wear and tear. - o Mechanism: Lubricant forms a thin film between surfaces, preventing metal-to-metal contact. Cooling: - o Purpose: Helps dissipate heat generated by friction and combustion. - o Mechanism: Absorbs and transfers heat away from hot engine components. Cleaning: - o Purpose: Carries away contaminants and debris. - o Mechanism: Lubricant suspends particles and deposits them in the oil filter. Sealing: - o Purpose: Improves the seal between the piston and cylinder walls. - o Mechanism: Lubricant helps maintain compression by sealing gaps. Corrosion Protection: - o Purpose: Protects metal surfaces from rust and corrosion.	1	Remember

	- o Mechanism: Contains additives that inhibit oxidation and corrosion. Components Involved in Engine Lubrication 1. Oil Pump: - o Function: Circulates oil throughout the engine. - o Location: Typically mounted on the engine block. 2. Oil Filter: - o Function: Removes contaminants and particles from the oil. - o Location: Usually located along the oil flow path. 3. Oil Pan (Sump): - o Function: Stores the oil when the engine is off. - o Location: Mounted at the bottom of the engine. 4. Lubrication Channels: - o Function: Directs oil to various engine components. - o Location: Integrated within the engine block and cylinder head. Lubrication System Types 1. Splash Lubrication: - o Mechanism: Oil is splashed onto moving parts by the motion of the crankshaft. - o Use: Common in older or simpler engines. 2. Pressure Lubrication: - o Mechanism: Oil is pumped under pressure through channels to critical components. - o Use: Common in modern engines for better oil distribution. 3. Dry Sump Lubrication: - o Mechanism: Oil is stored in a separate tank and pumped to the engine. - o Use: Often used in high-performance engines to prevent oil starvation under extreme conditions. Sketch of Engine Lubrication System		
--	--	--	--

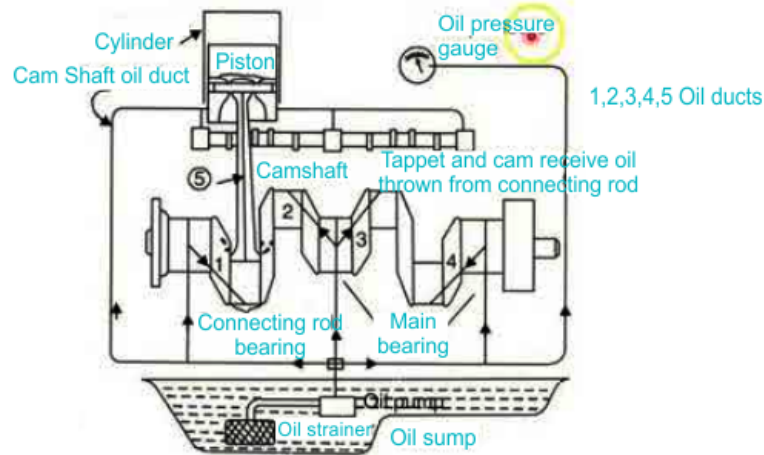

Pressure Lubrication System

1. **Oil Pan (Sump):**
 - o **Position:** At the bottom of the engine.
 - o **Function:** Contains the oil reservoir.
2. **Oil Pump:**
 - o **Position:** Connected to the oil pan.
 - o **Function:** Pumps oil to various engine parts.
3. **Oil Filter:**
 - o **Position:** Along the oil flow path from the pump.
 - o **Function:** Filters contaminants from the oil.
4. **Lubrication Channels:**
 - o **Position:** Integrated within the engine block.
 - o **Function:** Distributes oil to bearings, pistons, and other components.
5. **Connecting Rods and Crankshaft:**
 - o **Position:** Located inside the engine block.
 - o **Function:** Splash lubrication is often used to oil these parts.

2

Discuss about the Properties of Lubricants & explain about its advantages and disadvantages.

Properties of Lubricants

Lubricants are essential for reducing friction, wear, and heat in mechanical systems. The effectiveness of a lubricant depends on several key properties:

1. **Viscosity:**
 - o **Definition:** The measure of a lubricant's resistance to flow. Higher viscosity means thicker oil, while lower viscosity means thinner oil.

1

Remember

	- o Importance: Adequate viscosity ensures proper lubrication under varying temperature and pressure conditions. It affects the lubricant's ability to form a protective film between moving parts. 2. Viscosity Index (VI): - o Definition: A measure of how much a lubricant's viscosity changes with temperature. A high VI indicates less change in viscosity with temperature. - o Importance: A high VI is desirable because it means the lubricant maintains its effectiveness across a wider temperature range. 3. Flash Point: - o Definition: The temperature at which the lubricant vapors ignite in air. - o Importance: A higher flash point indicates better thermal stability and safety during high-temperature operation. 4. Pour Point: - o Definition: The lowest temperature at which the lubricant remains fluid. - o Importance: A lower pour point ensures the lubricant remains effective at low temperatures, preventing it from becoming too thick to flow. 5. Lubricating Ability: - o Definition: The ability of a lubricant to form a protective film on surfaces. - o Importance: Good lubricating ability reduces friction and wear by preventing metal-to-metal contact. 6. Additive Package: - o Definition: Various chemicals added to lubricants to enhance their performance. - o Common Additives: ▪ Detergents: Keep the engine clean by preventing deposit formation. ▪ Dispersants: Help suspend particles in the oil. ▪ Anti-wear Agents: Protect metal surfaces from wear. ▪ Antioxidants: Prevent oxidation and degradation. 7. Corrosion and Rust Protection: - o Definition: The ability of a lubricant to prevent corrosion and rust formation on metal surfaces. - o Importance: Ensures long-term protection of engine and machinery components.		
--	---	--	--


	8. Thermal Stability: - o Definition: The ability of a lubricant to remain stable and effective under high temperatures. - o Importance: Prevents the breakdown of the lubricant and formation of harmful deposits. Advantages of Lubricants 1. Reduces Friction: - o Advantage: Minimizes friction between moving parts, reducing wear and tear and improving efficiency. 2. Prevents Wear and Tear: - o Advantage: Forms a protective film on surfaces, extending the lifespan of components. 3. Improves Efficiency: - o Advantage: Reduces energy loss due to friction, improving overall mechanical efficiency. 4. Cools Components: - o Advantage: Absorbs and dissipates heat generated by friction, preventing overheating. 5. Cleans and Protects: - o Advantage: Helps remove contaminants and prevent rust and corrosion, maintaining clean and protected surfaces. 6. Maintains Proper Functioning: - o Advantage: Ensures smooth operation of machinery and engines, reducing the risk of failure. Disadvantages of Lubricants 1. Degradation Over Time: - o Disadvantage: Lubricants can degrade due to oxidation, high temperatures, and contamination, reducing their effectiveness. 2. Maintenance Requirements: - o Disadvantage: Regular monitoring and changing of lubricants are required to ensure optimal performance and avoid potential issues. 3. Cost: - o Disadvantage: High-quality lubricants and their additives can be expensive, impacting overall maintenance costs. 4. Environmental Impact: - o Disadvantage: Improper disposal of used lubricants can lead to environmental contamination.		
--	--	--	--

	5. Potential for Sludge Formation: o Disadvantage: Over time, lubricants can form sludge or varnish, which can clog filters and reduce engine performance.		
3	Explain about types of lubricants & What are the advantages and disadvantages of it? Types of Lubricants Lubricants can be categorized based on their composition and application. The main types include: 1. Mineral Oils: - o Definition: Derived from refining crude oil. - o Types: Include paraffinic, naphthenic, and aromatic oils. - o Applications: Widely used in automotive engines, industrial machinery, and compressors. 2. Synthetic Oils: - o Definition: Man-made lubricants synthesized from chemical compounds. - o Types: Include ester-based, phosphate esters, and organosilicon compounds. - o Applications: Used in high-performance engines, aerospace, and extreme temperature environments. 3. Semi-Synthetic Oils: - o Definition: A blend of mineral oils and synthetic oils. - o Applications: Provides enhanced performance compared to mineral oils but at a lower cost than full synthetics. 4. Greases: - o Definition: Consist of a lubricant (oil) thickened with a soap or non-soap thickener. - o Types: Include lithium-based, calcium-based, and complex greases. - o Applications: Used in applications where a liquid lubricant would not stay in place, such as bearings, joints, and open gears. 5. Bio-Lubricants: - o Definition: Made from renewable resources and designed to be biodegradable. - o Types: Include ester-based, vegetable oils, and animal fats. - o Applications: Used in industries where environmental impact is a concern, such as forestry and agriculture. 6. Dry Lubricants: - o Definition: Solid lubricants that work without liquid oil, such as graphite or molybdenum disulfide.	1	Remember


	○ Applications: Used in high-temperature applications or where liquid lubricants would be unsuitable. 7. Water-Based Lubricants: ○ Definition: Lubricants that use water as the primary fluid, often with additives to improve performance. ○ Types: Include soluble oils, emulsions, and gels. ○ Applications: Used in machining processes, such as cutting and grinding. Advantages and Disadvantages of Different Types of Lubricants 1. Mineral Oils ● Advantages: ○ Cost-Effective: Generally less expensive than synthetic oils. ○ Wide Availability: Readily available and used in a variety of applications. ○ Good Lubrication: Effective for many standard applications. ● Disadvantages: ○ Lower Performance: May not perform as well in extreme temperatures or high-stress conditions compared to synthetics. ○ Degradation: Can degrade faster and require more frequent changes. 2. Synthetic Oils ● Advantages: ○ High Performance: Excellent performance under extreme temperatures and high-stress conditions. ○ Longer Life: Typically last longer and maintain their properties better over time. ○ Reduced Deposits: Produce fewer deposits and sludge. ● Disadvantages: ○ Cost: Generally more expensive than mineral oils. ○ Compatibility: May not be compatible with all systems, requiring careful selection. 3. Semi-Synthetic Oils ● Advantages:		
--	---	--	--

	○ Balanced Performance: Offers improved performance compared to mineral oils at a lower cost than full synthetics. ○ Versatility: Suitable for a wide range of applications. ● Disadvantages: ○ Intermediate Cost: More expensive than mineral oils but less so than full synthetics. ○ Performance Limitations: May not match the high-performance standards of fully synthetic oils. 4. Greases ● Advantages: ○ Stay in Place: Ideal for applications where the lubricant needs to stay in place and withstand high pressures. ○ Protection: Provides excellent protection against water and contaminants. ● Disadvantages: ○ Limited Flow: Can be less effective in applications requiring free-flowing lubricants. ○ Cost: Some high-performance greases can be expensive.		
4	Explain About wet sump lubrication system with neat sketch. Wet Sump Lubrication System Wet sump lubrication is a common system used in internal combustion engines where the oil is stored in a sump or oil pan located at the bottom of the engine. This system is simple and widely used in many automotive and small engine applications. Components of Wet Sump Lubrication System 1. Oil Pan (Sump): ○ Function: Holds the oil when the engine is off. ○ Location: Mounted at the bottom of the engine. 2. Oil Pump: ○ Function: Pumps oil from the oil pan to various engine components. ○ Types: Gear pump, rotor pump, or vane pump. ○ Location: Attached to the engine block or integrated with the oil pan. 3. Oil Filter:	1	Remember

	○ Function: Removes contaminants and particles from the oil. ○ Location: Installed along the oil flow path, usually close to the oil pump. 4. Oil Pickup Tube: ○ Function: Draws oil from the oil pan and delivers it to the oil pump. ○ Location: Extends into the oil pan and is connected to the pump. 5. Lubrication Channels: ○ Function: Distribute oil to various engine components like bearings, pistons, and camshaft. ○ Location: Integrated within the engine block and cylinder head. 6. Oil Pressure Relief Valve: ○ Function: Regulates oil pressure and prevents excessive pressure buildup. ○ Location: Usually located in the oil pump or engine block. 7. Oil Cooler (Optional): ○ Function: Cools the oil if necessary to maintain optimal operating temperature. ○ Location: Positioned in the oil circuit. How Wet Sump Lubrication System Works 1. Oil Collection: ○ When the engine is off, oil collects in the oil pan at the bottom of the engine. 2. Oil Pump Operation: ○ When the engine starts, the oil pump draws oil from the oil pan through the oil pickup tube. ○ The pump then pressurizes the oil and sends it through the oil filter to remove any contaminants. 3. Distribution: ○ Clean, pressurized oil is distributed through lubrication channels to various engine components. ○ Oil lubricates moving parts such as bearings, camshafts, and pistons, reducing friction and wear. 4. Return to Oil Pan: ○ After lubricating the engine components, the oil returns to the oil pan. ○ It collects any debris or contaminants and is ready to be recirculated when the engine starts again. 5. Oil Pressure Regulation:		
--	---	--	--

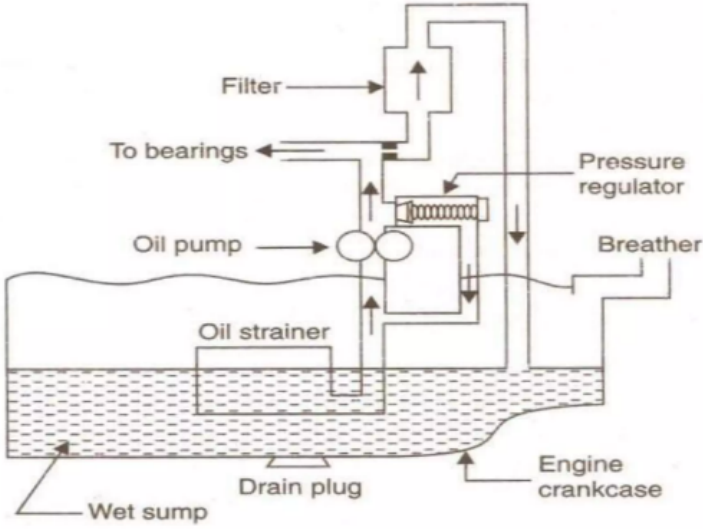	○ The oil pressure relief valve ensures that the oil pressure remains within the specified range, preventing damage to the engine. Sketch of Wet Sump Lubrication System Here's a simplified sketch of a typical wet sump lubrication system: Lubrication System – Wet Sump 		
5	Briefly explain about components of water cooling systems with neat diagram. Components of Water Cooling Systems Water cooling systems are commonly used in internal combustion engines and industrial machinery to manage temperature by transferring heat away from the engine. The primary components of a water cooling system include: 1. Radiator: ○ Function: Transfers heat from the engine coolant to the air. ○ Location: Mounted at the front of the engine compartment. ○ Construction: Consists of a series of tubes and fins that maximize surface area for heat dissipation. 2. Water Pump:	2	Understand

	- o Function: Circulates coolant through the engine and radiator. - o Location: Typically mounted on the front of the engine or driven by a belt. - o Construction: Contains an impeller that pushes the coolant through the system. 3. Thermostat: - o Function: Regulates the engine temperature by controlling coolant flow to the radiator. - o Location: Installed in the engine block or the coolant outlet. - o Construction: A valve that opens and closes based on temperature. 4. Coolant Reservoir (Expansion Tank): - o Function: Provides additional coolant capacity and absorbs coolant expansion. - o Location: Positioned near the radiator. - o Construction: A sealed container that maintains coolant levels and pressure. 5. Hoses: - o Function: Transport coolant between the engine, radiator, and other components. - o Location: Connects various parts of the cooling system. - o Construction: Made of rubber or reinforced materials to withstand temperature and pressure. 6. Cooling Fans: - o Function: Enhances air flow through the radiator to improve heat dissipation. - o Location: Mounted behind the radiator. - o Construction: Electric or belt-driven fans that turn on based on temperature. 7. Heater Core: - o Function: Transfers heat from the coolant to the cabin for heating. - o Location: Located inside the vehicle cabin. - o Construction: Similar to a small radiator that provides heat to the passenger compartment. 8. Water Jacket: - o Function: Circulates coolant around the engine block to absorb and transfer heat. - o Location: Integrated into the engine block and cylinder head. - o Construction: Channels and passages within the engine casting.		
--	--	--	--

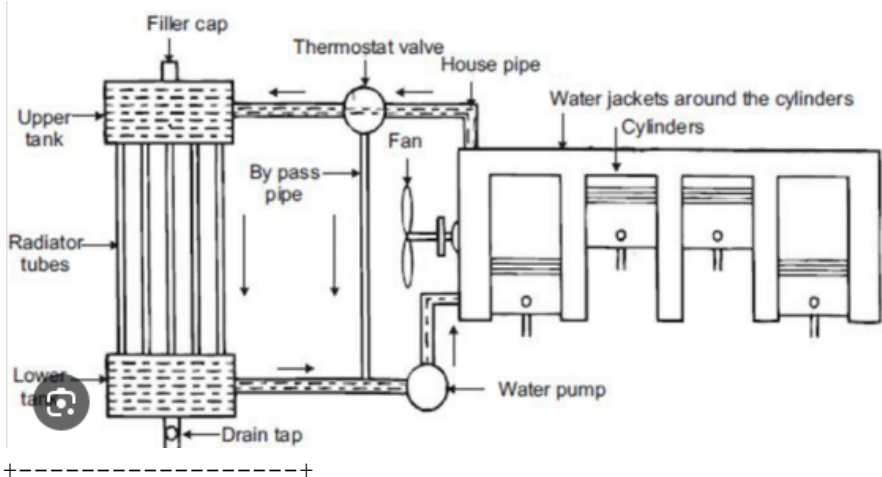	Diagram of Water Cooling System Here's a simplified sketch of a typical water cooling system: 		
6	Explain About Dry sump lubrication system with neat sketch. Dry Sump Lubrication System The dry sump lubrication system is used primarily in high-performance and racing engines where conventional wet sump systems might not provide adequate oil control, especially under high-G forces or extreme conditions. Unlike the wet sump system, the dry sump system does not rely on an oil pan to collect oil. Components of Dry Sump Lubrication System Oil Tank: ○ Function: Stores the oil separately from the engine. ○ Location: Mounted externally to the engine, often in the vehicle's trunk or elsewhere. ○ Construction: A sealed container that holds the oil for the entire system. Oil Pump(s): ○ Function: Transfers oil from the tank to the engine and returns it after lubrication. ○ Types: Typically two or more pumps are used—one for scavenging oil from the engine and another for pressurizing oil to the engine components. ○ Location: Attached to the engine or integrated with the oil tank. Scavenge Pump:	1	Remember

	○ Function: Removes oil from the engine and returns it to the oil tank. ○ Location: Often located in the oil sump area of the engine. ○ Construction: Works to create a vacuum and pull oil from the engine's lubrication channels. 4. Pressure Pump: ○ Function: Pumps pressurized oil from the oil tank to the engine's lubrication points. ○ Location: Integrated with or located close to the oil tank. ○ Construction: Provides the necessary pressure to ensure proper lubrication of engine components. 5. Oil Cooler: ○ Function: Cools the oil to maintain optimal operating temperatures. ○ Location: Positioned in the oil circuit, often close to the oil tank or integrated with it. 6. Oil Lines and Hoses: ○ Function: Transport oil between the tank, pumps, and engine. ○ Location: Connects various components in the system. ○ Construction: High-pressure, heat-resistant hoses. 7. Oil Filter: ○ Function: Filters contaminants from the oil before it enters the engine. ○ Location: Typically located in the oil circuit between the pump and engine. DRY SUMP LUBRICATING SYSTEM How Dry Sump Lubrication System Works 1. Oil Collection: ○ The scavenge pump removes oil from the engine's sump and channels it back to the external oil tank.		
--	--	--	--


	2. Oil Storage: ○ The oil is stored in the external oil tank, which maintains a reserve of oil and helps separate contaminants. 3. Oil Pressurization: ○ The pressure pump draws oil from the oil tank and pressurizes it before sending it to the engine's lubrication channels. 4. Oil Distribution: ○ Pressurized oil flows through the engine's lubrication system, lubricating moving parts such as bearings and pistons. 5. Oil Cooling and Filtration: ○ As oil circulates, it may pass through an oil cooler to regulate temperature and an oil filter to remove contaminants. 6. Return to Oil Tank: ○ After lubricating the engine components, the oil returns to the external oil tank via the scavenge pump.		
7	Discuss about comparison of liquid and air cooled systems. Comparison of Liquid-Cooled and Air-Cooled Systems Both liquid-cooled and air-cooled systems are used to manage engine temperatures, each with its own advantages and disadvantages. The choice between these systems depends on the engine's application, design requirements, and performance needs. Liquid-Cooled Systems Definition: Liquid-cooled systems use a coolant (typically a mixture of water and antifreeze) to absorb heat from the engine and transfer it to a radiator, where it is cooled by air. Components: ● Radiator: Cools the hot coolant. ● Water Pump: Circulates the coolant through the system. ● Thermostat: Regulates coolant temperature. ● Coolant Reservoir: Stores additional coolant and absorbs expansion. ● Hoses and Pipes: Transport coolant between components. Advantages:	1	Remember

	1. Effective Cooling: ○ Advantage: Provides better heat dissipation, making it suitable for high-performance and high-load engines. ○ Explanation: Liquid coolant has a higher heat capacity than air, allowing for more efficient heat transfer. 2. Temperature Regulation: ○ Advantage: Maintains a stable engine temperature regardless of external conditions. ○ Explanation: The thermostat and radiator regulate the engine's operating temperature effectively. 3. Engine Design Flexibility: ○ Advantage: Allows for more compact and flexible engine designs. ○ Explanation: The engine can be designed without large cooling fins or external cooling mechanisms. 4. Better Performance in Extreme Conditions: ○ Advantage: Performs well in various environmental conditions, including extreme temperatures. ○ Explanation: The system is less affected by ambient air temperature compared to air-cooled systems. Disadvantages: 1. Complexity: ○ Disadvantage: More complex with additional components such as pumps, radiators, and thermostats. ○ Explanation: The increased complexity can lead to higher maintenance and repair costs. 2. Weight: ○ Disadvantage: Heavier due to the addition of the cooling system components. ○ Explanation: The radiator, water pump, and coolant add weight to the vehicle or engine. 3. Cost: ○ Disadvantage: Generally more expensive to install and maintain. ○ Explanation: The cost of components and the need for regular coolant changes contribute to higher costs. Air-Cooled Systems Definition: Air-cooled systems rely on air flow to cool the engine. Heat is dissipated directly from the engine's surfaces to the surrounding air, often assisted by cooling fins and fans.		
--	---	--	--

	Components: • Cooling Fins: Increase the surface area for heat dissipation. • Cooling Fan: Enhances air flow over the engine and cooling fins. • Engine Block: Designed with integrated cooling fins. Advantages: 1. Simplicity: ○ Advantage: Fewer components and simpler design. ○ Explanation: No need for radiators, water pumps, or thermostats, which reduces complexity. 2. Weight: ○ Advantage: Lighter as there is no need for a liquid cooling system. ○ Explanation: Eliminates the weight of the radiator, water pump, and coolant. 3. Cost: ○ Advantage: Generally less expensive to manufacture and maintain. ○ Explanation: Fewer parts and no need for coolant changes lower costs. 4. Reliability: ○ Advantage: Fewer moving parts mean fewer potential points of failure. ○ Explanation: The absence of a complex cooling system reduces the likelihood of leaks and mechanical failures. Disadvantages: 1. Limited Cooling Efficiency: ○ Disadvantage: Less effective in cooling high-performance or high-load engines. ○ Explanation: Air has a lower heat capacity compared to liquid, making it less effective for high-temperature applications. 2. Temperature Variation: ○ Disadvantage: Engine temperature can vary with ambient air conditions. ○ Explanation: Performance and cooling efficiency are affected by external temperature, potentially leading to overheating in hot conditions. 3. Design Constraints: ○ Disadvantage: Limited design flexibility due to the need for cooling fins and sufficient air flow. ○ Explanation: The engine design must accommodate fins and space for adequate air circulation.		
--	--	--	--

	4. Cooling in Extreme Conditions: ○ Disadvantage: Less effective in extreme cold or hot conditions. ○ Explanation: In very hot climates, air-cooled engines may struggle to dissipate heat effectively, while in cold climates, they may not reach optimal operating temperatures.		
8	Briefly explain about air cooling and water cooling system with neat sketch. Air Cooling System Definition: Air cooling systems use air to remove heat from the engine. The engine's heat is transferred directly to the air, typically using cooling fins and a fan to enhance the process. Components of Air Cooling System Cooling Fins: ○ Function: Increase the surface area for heat dissipation. ○ Location: Attached to the engine block and cylinder head. ○ Construction: Metal fins or ridges extending from the engine surface. Cooling Fan: ○ Function: Enhances air flow over the cooling fins to improve heat dissipation. ○ Location: Mounted behind the engine or in front of the fins. ○ Construction: Electric or belt-driven fan. Engine Block: ○ Function: Contains integrated cooling fins. ○ Location: The central component of the engine. How Air Cooling System Works Heat Transfer: ○ Heat is transferred from the engine components to the cooling fins. Air Flow: ○ Air flows over the cooling fins, absorbing heat from the engine. Heat Dissipation: ○ The heated air is carried away from the engine, reducing the engine temperature.	1	Remember

Diagram of Air Cooling System

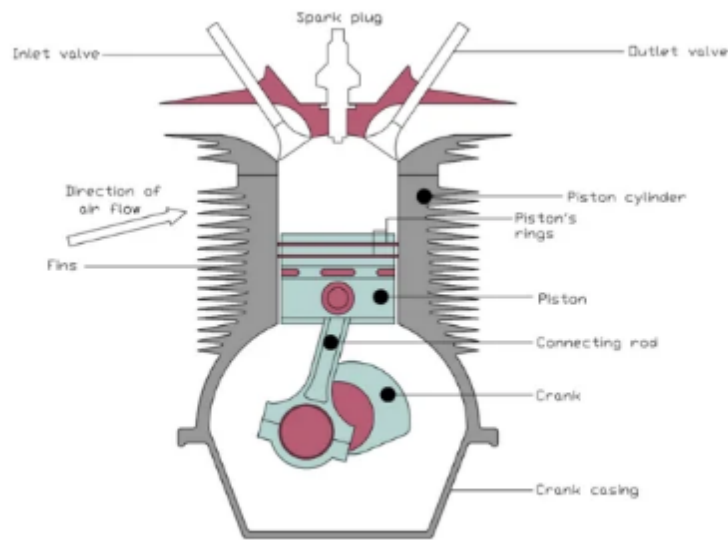

AIR COOLED ENGINE COOLING SYSTEM

Water Cooling System

Definition: Water cooling systems use a liquid coolant (typically a mixture of water and antifreeze) to absorb heat from the engine. The heated coolant is then passed through a radiator where it is cooled by air.

Components of Water Cooling System

1. Radiator:

- **Function:** Cools the hot coolant.
- **Location:** Mounted at the front of the engine compartment.
- **Construction:** Consists of tubes and fins.

2. Water Pump:

- **Function:** Circulates coolant through the engine and radiator.
- **Location:** Attached to the engine block or integrated with the oil pump.
- **Construction:** Contains an impeller to move the coolant.

3. Thermostat:


- **Function:** Regulates the engine temperature by controlling coolant flow.
- **Location:** Installed in the engine block.

- **Construction:** A valve that opens and closes based on temperature.
- 4. **Coolant Reservoir:**
 - **Function:** Provides additional coolant capacity and absorbs coolant expansion.
 - **Location:** Positioned near the radiator.
 - **Construction:** A sealed container.
- 5. **Hoses:**
 - **Function:** Transport coolant between components.
 - **Location:** Connects the engine, radiator, and other components.
 - **Construction:** Rubber or reinforced material.

How Water Cooling System Works

1. **Heat Absorption:**
 - Coolant absorbs heat from the engine as it circulates through the engine block and cylinder head.
2. **Heat Transfer:**
 - Heated coolant is pumped to the radiator.
3. **Heat Dissipation:**
 - The radiator cools the coolant using air flow.
4. **Coolant Return:**
 - The cooled coolant is returned to the engine for recirculation.

Diagram of Water Cooling System

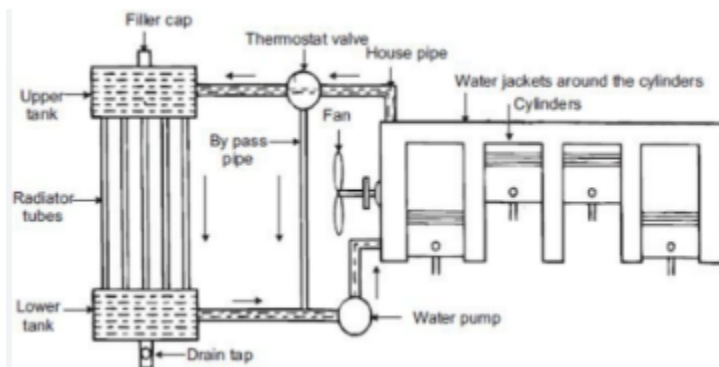

Introduction to Turbo charging and supercharging, Engine emissions - Emission control methods in SI and CI engines, catalytic converters-EGR, Modern evaporative emission control system Lean Burn Engines, homogeneous charge compression ignition engines.

Part A (2 marks)

Q.No	Question	BT Level*	Competence[#]
1	Define Turbo charging. Turbocharging Turbocharging is a method of increasing an engine's efficiency and power output by forcing extra compressed air into the combustion chamber using a turbine driven by the engine's exhaust gases.	1	Remember
2	Define supercharging. Supercharging Supercharging is a method of increasing an engine's power output by compressing the intake air using a mechanically driven compressor (supercharger), typically powered by a belt connected to the engine's crankshaft.	1	Remember
3	What is the Function of turbo charging? Function of Turbocharging The primary functions of turbocharging include: • Increasing air density entering the engine, allowing more fuel to be burned, thus increasing power output. • Improving overall engine efficiency and performance. • Reducing specific fuel consumption and emissions by improving combustion.	2	Understand
4	Define method of turbo charging. Method of Turbocharging Methods of turbocharging include: • Single-Turbo: One turbocharger compresses air for the engine.	2	Understand

	• Twin-Turbo: Two turbochargers work either in sequence or parallel to provide better performance across a range of speeds. • Variable Geometry Turbocharger (VGT): Adjusts the flow of exhaust gases to the turbine to optimize performance at different engine speeds. • Twin-Scroll Turbo: Uses a divided turbine housing and exhaust manifold to improve scavenging and reduce lag.		
5	List out the invisible and visible emission. Invisible and Visible Emission • Invisible Emissions: These include gases such as carbon monoxide (CO), hydrocarbons (HC), nitrogen oxides (NO_x), and sulfur oxides (SO_x). • Visible Emissions: These include smoke (particulate matter), often seen as black, blue, or white smoke depending on the cause.	2	Understand
6	Write short note on HC emissions. HC Emissions (Hydrocarbon Emissions) Hydrocarbon emissions result from incomplete combustion of fuel in the engine. They consist of unburned or partially burned fuel and are a significant contributor to smog and air pollution. HC emissions can be reduced through better fuel management, improved combustion efficiency, and emission control systems like catalytic converters.	2	Understand
7	Define Emission control methods. Emission Control Methods Emission control methods include: • Catalytic Converters: Convert harmful gases into less harmful emissions. • Exhaust Gas Recirculation (EGR): Reduces NO_x emissions by recirculating a portion of the exhaust gas back into the intake air. • Particulate Filters: Capture and remove particulate matter from diesel exhaust.	1	Remember

	● Selective Catalytic Reduction (SCR): Reduces NO_x emissions by injecting a urea solution into the exhaust stream. Evaporative Emission Control Systems: Prevent fuel vapors from escaping into the atmosphere.		
8	Explain Limitation of turbo charging. Limitations of Turbocharging ● Turbo Lag: Delay in power delivery due to the time taken for the turbocharger to spool up. ● Complexity: Increased engine complexity and potential maintenance issues. ● Heat Management: Increased heat generation requiring efficient cooling systems. ● Cost: Higher manufacturing and maintenance costs.	1	Remember
9	What are the methods of measuring the emission in engine? Methods of Measuring Emissions in Engines ● Gas Chromatography: For detailed analysis of gas components. ● Infrared Gas Analyzers: Measure CO, CO₂, and hydrocarbons. ● Chemiluminescence Analyzers: Measure NO_x emissions. ● Particulate Matter Samplers: Measure soot and other particulate emissions. ● Smoke Meters: Measure opacity of the exhaust to quantify visible emissions.	2	Understand
10	Write a short on carbon monoxide emissions. Carbon Monoxide Emissions Carbon monoxide (CO) is a colorless, odorless, and poisonous gas produced by the incomplete combustion of carbon-containing fuels. High CO emissions indicate poor combustion efficiency, often due to insufficient oxygen supply or poor engine maintenance. CO emissions can be reduced by using catalytic converters and ensuring proper engine tuning.	1	Remember
11	Explain EGR?	1	Remember

	Exhaust Gas Recirculation (EGR) EGR is an emission control technique that reduces NOx emissions by recirculating a portion of the exhaust gases back into the engine's intake manifold. This dilutes the oxygen in the intake air, lowers combustion temperatures, and reduces the formation of NOx.		
12	What is evaporative emission Evaporative Emission Evaporative emissions are the vapors that escape from a vehicle's fuel system, primarily due to the evaporation of fuel. These emissions occur during refueling, from the fuel tank, and from the fuel lines. Controlling evaporative emissions involves using systems like charcoal canisters to capture and store vapors until they can be burned in the engine.	1	Remember
13	What are the Methods of controlling emissions? Methods of Controlling Emissions ● Catalytic Converters: Convert harmful gases into less harmful substances. ● EGR Systems: Reduce NOx emissions by lowering combustion temperatures. ● Air Injection Systems: Inject air into the exhaust to promote further combustion of unburned hydrocarbons. ● Evaporative Emission Controls: Capture and recycle fuel vapors. ● Particulate Filters: Trap and remove particulate matter from diesel exhaust.	1	Remember
14	Define Effect of catalytic converters? Effect of Catalytic Converters Catalytic converters significantly reduce harmful emissions from the exhaust by converting CO, HC, and NOx into less harmful substances such as CO2, H2O, and N2 through oxidation and reduction reactions. They are essential for meeting emission standards and improving air quality.	1	Remember

15	Define Zero Emission. Zero Emission Zero emission refers to vehicles or systems that produce no direct exhaust emissions from the onboard source of power. Examples include electric vehicles (EVs) and hydrogen fuel cell vehicles (FCVs), which produce no tailpipe pollutants.	1	Remember
Part B (16 marks)			
Q.No	Question	BT Level*	Competence[#]
1	Briefly explain about Turbo charging & What are the advantages and disadvantages of it? Turbocharging Turbocharging is a technology used to increase the power output and efficiency of internal combustion engines by forcing more air into the combustion chamber. This is achieved using a turbine-driven compressor that compresses the incoming air, allowing the engine to burn more fuel and produce more power. How It Works: 1. Exhaust Gas Flow: Exhaust gases from the engine's cylinders flow through the turbine side of the turbocharger. 2. Turbine Rotation: The force of the exhaust gases spins the turbine, which is connected to a shaft. 3. Compressor Function: The spinning turbine drives the compressor on the other end of the shaft, which draws in and compresses more air. 4. Increased Air Intake: The compressed air is then forced into the engine's cylinders, allowing for more fuel to be burned and more power to be generated. Advantages of Turbocharging 1. Increased Power Output: - o Benefit: Turbocharging significantly boosts engine power without increasing engine size, leading to better performance and acceleration. 2. Improved Fuel Efficiency: - o Benefit: By enabling the engine to burn more fuel efficiently, turbocharging can improve fuel efficiency, especially at higher speeds and loads.	1	Remember

	3. Reduced Engine Size: - o Benefit: A smaller engine with a turbocharger can achieve power levels comparable to a larger engine, allowing for weight savings and better fuel economy. 4. Enhanced Performance at High Altitudes: - o Benefit: Turbochargers help maintain engine performance in high-altitude conditions where the air is thinner, providing consistent power output. 5. Lower Emissions: - o Benefit: By improving combustion efficiency, turbocharging can help reduce CO₂ and other emissions compared to larger, naturally aspirated engines. Disadvantages of Turbocharging 1. Increased Complexity: - o Issue: Turbocharging adds complexity to the engine and its components, including the turbocharger itself, intercoolers, and additional plumbing. 2. Higher Maintenance Costs: - o Issue: The added complexity can lead to higher maintenance and repair costs, including potential issues with the turbocharger, cooling systems, and related components. 3. Turbo Lag: - o Issue: There can be a delay (lag) between when the driver accelerates and when the turbocharger delivers increased power, particularly in smaller turbos or during rapid acceleration. 4. Heat Management: - o Issue: Turbochargers generate significant heat, which requires effective cooling solutions to prevent overheating and ensure reliable operation. 5. Potential for Increased Engine Stress: - o Issue: The increased pressure and power generated by turbocharging can put additional stress on engine components, potentially reducing engine lifespan if not properly managed. 6. Cost: - o Issue: Turbocharged engines can be more expensive to manufacture and purchase, potentially increasing the cost of vehicles equipped with this technology.		
2	Discuss briefly about the need of Engine emissions control.	2	Understand

	Engine emissions control is essential for several key reasons, all of which are aimed at reducing the negative impact of vehicle emissions on health, environment, and compliance with regulatory standards. Here's a brief discussion on why engine emissions control is crucial: 1. Environmental Protection ● Reduction of Pollutants: Engine emissions contain pollutants such as carbon monoxide (CO), nitrogen oxides (NOx), hydrocarbons (HC), and particulate matter (PM). Controlling these emissions helps to reduce air pollution and mitigate the adverse effects on ecosystems, including acid rain and smog. ● Climate Change Mitigation: Vehicles contribute to greenhouse gas emissions, particularly carbon dioxide (CO2). Effective emissions control reduces CO2 emissions and helps combat climate change by minimizing the carbon footprint of vehicles. 2. Public Health ● Improved Air Quality: Pollutants from engine emissions can cause respiratory and cardiovascular diseases, and exacerbate conditions such as asthma. Reducing these emissions improves air quality and has a direct positive impact on public health. ● Prevention of Toxic Exposure: Some engine emissions contain toxic substances like benzene and formaldehyde, which are harmful to human health. Emissions control systems help to lower exposure to these harmful chemicals. 3. Regulatory Compliance ● Legal Requirements: Governments and regulatory bodies impose stringent emissions standards and regulations for vehicles to ensure that manufacturers produce cleaner and more efficient engines. Compliance with these regulations is necessary to avoid legal penalties and fines. ● Market Access: Adhering to emissions standards is essential for accessing markets where regulations are in place. Vehicles that meet these standards can be sold in regions with strict environmental regulations.		
--	---	--	--

	4. Economic Benefits ● Fuel Efficiency: Many emissions control technologies, such as advanced combustion systems and catalytic converters, also improve fuel efficiency. This leads to cost savings for vehicle owners and reduces overall fuel consumption. ● Resale Value: Vehicles equipped with up-to-date emissions control systems may have higher resale value due to their compliance with environmental regulations and improved performance. 5. Technological Innovation ● Advancement of Clean Technologies: Emissions control drives the development and adoption of advanced technologies, including electric and hybrid vehicles, which contribute to a more sustainable transportation system. ● Incentives and Support: Governments often provide incentives and support for vehicles that meet or exceed emissions standards, encouraging the adoption of cleaner technologies and fostering innovation in the automotive industry.		
3	Describe in detail the causes of hydro carbon emissions from SI engines. Hydrocarbon (HC) emissions from spark ignition (SI) engines are primarily due to incomplete combustion of the air-fuel mixture. Several factors contribute to HC emissions, each related to various aspects of engine design, operation, and maintenance. Here's a detailed look at the causes of hydrocarbon emissions from SI engines: 1. Incomplete Combustion ● Rich Air-Fuel Mixture: When the air-fuel mixture is too rich (i.e., too much fuel relative to air), not all the fuel is burned completely. This excess fuel can exit the engine as unburned hydrocarbons. ● Poor Atomization of Fuel: Inadequate fuel atomization leads to large fuel droplets that do not burn completely. This is often due to malfunctioning fuel injectors or improper fuel pressure.	2	Understand


	2. Engine Design and Operating Conditions ● Engine Temperature: Engines running at lower temperatures or having inadequate warm-up time may not reach the optimal temperature for complete combustion. This results in higher HC emissions during cold starts. ● Timing of Ignition: Incorrect ignition timing can cause misfires or incomplete combustion. If the spark plug fires too early or too late, it can lead to unburned fuel. ● Engine Load and Speed: Under certain load conditions or at low engine speeds, combustion may not be complete. Engines operating outside their optimal load range often exhibit higher HC emissions. 3. Fuel System Issues ● Leaky Fuel Injectors: Fuel injectors that leak or have faulty nozzles can introduce excess fuel into the combustion chamber, leading to incomplete combustion and higher HC emissions. ● Carburetor Problems: In carbureted engines, issues such as a misadjusted air-fuel mixture or a malfunctioning choke can cause excess fuel to be present, resulting in higher HC emissions. 4. Air-Fuel Mixture Imbalance ● Poor Air-Fuel Ratio: An incorrect air-fuel ratio, whether too rich or too lean, can lead to incomplete combustion. A rich mixture results in excess fuel, while a lean mixture can lead to engine misfires. ● Intake System Leaks: Leaks in the intake manifold or vacuum lines can cause an imbalance in the air-fuel mixture, affecting combustion efficiency and leading to higher HC emissions. 5. Ignition System Issues ● Faulty Spark Plugs: Worn or fouled spark plugs can cause weak or inconsistent sparks, leading to incomplete combustion and higher HC emissions. ● Ignition Coil Problems: Malfunctioning ignition coils can result in insufficient spark energy, leading to incomplete combustion and increased HC emissions.		
--	--	--	--

	6. Exhaust System Issues ● Malfunctioning Catalytic Converter: The catalytic converter is responsible for converting HC, CO, and NO_x into less harmful emissions. A clogged or malfunctioning catalytic converter can result in higher HC emissions. ● Exhaust Leaks: Leaks in the exhaust system can allow unburned fuel to escape, contributing to higher HC emissions. 7. Engine Wear and Tear ● Worn Piston Rings: Worn or damaged piston rings can lead to poor sealing between the piston and cylinder walls, allowing unburned fuel to enter the crankcase and increasing HC emissions. ● Valve Seal Issues: Worn or damaged valve seals can cause oil to enter the combustion chamber, leading to incomplete combustion and higher HC emissions. 8. Environmental Factors ● Temperature Extremes: Extreme temperatures can affect fuel evaporation and combustion. Cold weather can make fuel less volatile, leading to incomplete combustion, while hot weather can cause fuel vaporization issues.		
4	Explain about Emission control methods in SI and CI engines. Emission control methods for Spark Ignition (SI) and Compression Ignition (CI) engines focus on reducing the pollutants emitted during combustion. Here's an overview of the various methods used to control emissions in each type of engine: Emission Control Methods for Spark Ignition (SI) Engines 1. Catalytic Converters: - o Function: Converts harmful emissions like carbon monoxide (CO), hydrocarbons (HC), and nitrogen oxides (NO_x) into less harmful substances such as carbon dioxide (CO₂), nitrogen (N₂), and water (H₂O). - o Types:	1	Remember

	▪ Three-Way Catalytic Converter: Handles CO, HC, and NOx simultaneously. ▪ Selective Catalytic Reduction (SCR): Uses a urea-based additive to reduce NOx emissions. 2. Fuel Injection Systems: - o Function: Provides precise control over the air-fuel mixture, improving combustion efficiency and reducing emissions. - o Types: ▪ Port Fuel Injection (PFI): Injects fuel into the intake manifold. ▪ Direct Fuel Injection (DFI): Injects fuel directly into the combustion chamber, leading to more efficient combustion. 3. Oxygen Sensors: - o Function: Monitor the oxygen levels in the exhaust gases and provide feedback to the engine control unit (ECU) to adjust the air-fuel ratio for optimal combustion. 4. EGR (Exhaust Gas Recirculation): - o Function: Recirculates a portion of the exhaust gases back into the intake manifold, reducing combustion temperatures and lowering NOx emissions. 5. On-Board Diagnostics (OBD): - o Function: Monitors engine performance and emission control systems to ensure they are functioning properly. It provides diagnostic information and alerts for maintenance or repairs. 6. Engine Tuning and Calibration: - o Function: Adjusts engine parameters such as ignition timing and air-fuel ratio to optimize performance and reduce emissions. 7. Evaporative Emission Control: - o Function: Captures and stores fuel vapors that evaporate from the fuel tank and fuel system to prevent their release into the atmosphere. - o Components: Includes charcoal canisters and vapor recovery systems. Emission Control Methods for Compression Ignition (CI) Engines 1. Turbocharging and Intercooling: - o Function: Increases the efficiency of the engine by forcing more air into the combustion chamber and		
--	---	--	--

	cooling the intake air, which helps in better combustion and reduced emissions. 2. Diesel Particulate Filters (DPF): - o Function: Captures and removes particulate matter (soot) from the exhaust gases. The filter periodically undergoes regeneration to burn off accumulated soot. 3. Selective Catalytic Reduction (SCR): - o Function: Uses a urea-based additive (AdBlue) to reduce NOx emissions in the exhaust gases. The urea reacts with NOx to form nitrogen and water. 4. Exhaust Gas Recirculation (EGR): - o Function: Recirculates a portion of the exhaust gases back into the intake manifold to lower combustion temperatures and reduce NOx emissions. 5. Common Rail Direct Fuel Injection: - o Function: Provides precise control of fuel injection timing and quantity, improving combustion efficiency and reducing NOx and particulate emissions. 6. Turbocharging with Variable Geometry: - o Function: Adjusts the turbocharger's geometry to optimize performance and efficiency across a range of engine speeds and loads, leading to reduced emissions. 7. Engine Calibration and Management: - o Function: Optimizes engine parameters such as fuel injection timing, boost pressure, and combustion temperature to improve efficiency and reduce emissions. 8. Diesel Oxidation Catalysts (DOC): - o Function: Converts CO and HC into CO₂ and H₂O, and also helps in reducing particulate emissions by oxidizing soot.		
5	Briefly explain about catalytic converters with neat sketches. A catalytic converter is an essential component of a vehicle's exhaust system designed to reduce harmful emissions. It uses a chemical reaction to convert toxic gases into less harmful substances before they exit the exhaust system. Here's a brief explanation along with a simplified sketch to illustrate its components and function: Function of a Catalytic Converter 1. Reduction of Emissions:	1	Remember

	- o Chemical Reactions: The catalytic converter facilitates chemical reactions that convert harmful gases: ▪ Carbon Monoxide (CO) is converted into Carbon Dioxide (CO₂). ▪ Hydrocarbons (HC) are converted into Carbon Dioxide (CO₂) and Water (H₂O). ▪ Nitrogen Oxides (NO_x) are converted into Nitrogen (N₂) and Oxygen (O₂). 2. Three Main Stages: - o Reduction Catalyst: Converts NO_x into N₂ and O₂. - o Oxidation Catalyst: Converts CO into CO₂ and HC into CO₂ and H₂O. - o Storage/Trap Catalyst: Stores excess oxygen and converts it during the process. Sketch of a Catalytic Converter Note: I'm unable to draw directly here, but you can visualize the structure based on the description below. 1. Structure: - o Inlet and Outlet: The converter has an inlet where exhaust gases enter and an outlet where cleaned gases exit. - o Substrate: Inside the converter is a substrate, often a honeycomb or ceramic structure, coated with catalytic materials. - o Catalyst Coating: The substrate is coated with platinum, palladium, and rhodium metals that act as catalysts. 2. Operation: - o Exhaust Gas Flow: Exhaust gases flow through the substrate where they come into contact with the catalyst. - o Chemical Reactions: The catalysts facilitate the chemical reactions that reduce emissions. - o Cleaned Exhaust: The cleaned gases exit through the outlet.		
--	--	--	--

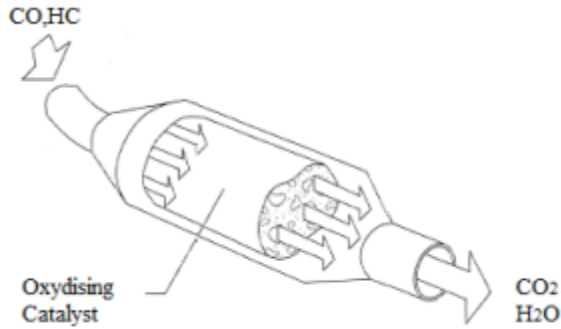

Detailed Explanation with Components

1. **Inlet Pipe:** Connects the catalytic converter to the engine's exhaust manifold.
2. **Catalytic Core (Substrate):**
 - o **Honeycomb Structure:** Provides a large surface area for the reactions to take place. The honeycomb or ceramic structure is coated with precious metals.
 - o **Catalyst Coating:** Contains platinum, palladium, and rhodium, which are active in the reactions.
3. **Outlet Pipe:** Allows the processed gases to exit the catalytic converter and flow through the rest of the exhaust system.
4. **Heat Shield:** Surrounds the catalytic converter to protect other components from the heat generated during operation.

Advantages

- **Reduces Harmful Emissions:** Effectively reduces CO, HC, and NO_x emissions.
- **Improves Air Quality:** Helps in meeting regulatory emission standards and improving air quality.

Disadvantages

- **Cost:** Catalytic converters can be expensive to replace due to the precious metals used in their construction.
- **Maintenance:** Requires proper maintenance of the engine and exhaust system to function effectively. Clogged or damaged converters can lead to reduced performance and increased emissions.

6	Briefly explain about supercharging. What are the advantages and disadvantages of it?	1	Remember
---	---	---	----------

	Supercharging Supercharging is a method used to increase the power output of an internal combustion engine by forcing more air into the combustion chamber. This is achieved using a supercharger, a mechanical device that compresses and delivers more air (and therefore more oxygen) into the engine, allowing it to burn more fuel and produce more power. How Supercharging Works 1. Air Compression: The supercharger draws in air from the atmosphere and compresses it, increasing the air density. 2. Increased Air Intake: The compressed air is then forced into the engine's combustion chamber. 3. Enhanced Combustion: With more air available, the engine can burn more fuel, leading to increased power output. Types of Superchargers 1. Roots Supercharger: - o Function: Uses two rotors to compress and push air into the engine. - o Feature: Provides a high boost at lower engine speeds. 2. Centrifugal Supercharger: - o Function: Uses a centrifugal force to compress air using a spinning impeller. - o Feature: Delivers higher boost at higher engine speeds. 3. Twin-Screw Supercharger: - o Function: Uses two interlocking screws to compress air. - o Feature: Offers high efficiency and a compact design. 4. Electric Supercharger: - o Function: Uses an electric motor to drive the compressor. - o Feature: Provides boost without the power loss associated with mechanical superchargers. Advantages of Supercharging 1. Increased Power Output:		
--	---	--	--

	- o Benefit: Significantly boosts engine power and performance, allowing for higher acceleration and speed. 2. Improved Engine Efficiency: - o Benefit: By increasing the air-fuel mixture, supercharging can enhance engine efficiency, especially at higher speeds. 3. Better Performance at High Altitudes: - o Benefit: Helps maintain engine performance at high altitudes where the air density is lower. 4. Instant Power Delivery: - o Benefit: Provides immediate power increase without the lag associated with turbochargers. Disadvantages of Supercharging 1. Increased Engine Load: - o Issue: The supercharger draws power from the engine's crankshaft, which can increase the overall load on the engine and reduce fuel efficiency. 2. Higher Fuel Consumption: - o Issue: Increased air and fuel intake can lead to higher fuel consumption, potentially offsetting some of the performance gains. 3. Heat Generation: - o Issue: Compressing air generates additional heat, which can increase engine temperatures and require effective cooling solutions. 4. Cost and Complexity: - o Issue: Installing a supercharger adds complexity to the engine and can be costly, including the need for additional maintenance and parts. 5. Potential Engine Wear: - o Issue: The increased pressure and power can put additional stress on engine components, potentially leading to higher wear and reduced engine lifespan if not managed properly.		
7	Discuss about Modern evaporative emission control system Lean Burn Engines. Modern Evaporative Emission Control Systems in Lean Burn Engines Lean burn engines operate with a lean air-fuel mixture, meaning they use more air and less fuel compared to a stoichiometric mixture	2	Understand

	(the ideal ratio for complete combustion). This approach improves fuel efficiency and reduces CO₂ emissions. However, it can increase the formation of nitrogen oxides (NO_x) and requires advanced emission control technologies to manage evaporative emissions effectively. Here's an overview of modern evaporative emission control systems used in lean burn engines: Key Components of Evaporative Emission Control Systems 1. Evaporative Emission Control System (EECS): - o Function: Captures and stores fuel vapors that evaporate from the fuel tank and fuel system. This prevents these vapors from escaping into the atmosphere and contributes to reducing hydrocarbon (HC) emissions. 2. Charcoal Canister (Activated Carbon Canister): - o Function: Contains activated carbon that adsorbs fuel vapors from the fuel tank and other parts of the fuel system. The canister prevents vapors from entering the atmosphere and stores them until they can be purged and burned in the engine. 3. Purge Valve: - o Function: Controls the flow of fuel vapors from the charcoal canister into the intake manifold. It opens to allow the stored vapors to be drawn into the engine and burned during combustion. 4. Fuel Tank Pressure Sensor: - o Function: Monitors the pressure inside the fuel tank to detect any potential leaks or issues in the evaporative emission control system. 5. Fuel Vapor Recovery System: - o Function: Includes components such as the vapor recovery pipe and connections that ensure that fuel vapors are properly routed to the charcoal canister and subsequently purged into the engine. Challenges with Lean Burn Engines and Emission Control 1. Increased NO_x Emissions: - o Challenge: Lean burn engines tend to produce higher levels of NO_x because the higher air-fuel ratio leads to higher combustion temperatures.		
--	--	--	--

	- o Solution: Advanced emission control technologies, such as selective catalytic reduction (SCR) and lean NOx traps (LNT), are used to reduce NOx emissions. 2. Evaporative Emissions: - o Challenge: Fuel vapors can still escape from the fuel system, even with advanced control systems, particularly during temperature changes and engine operation. - o Solution: Modern EECS and canister designs are optimized to minimize these emissions and improve overall efficiency. 3. System Complexity: - o Challenge: The integration of various components and sensors adds complexity to the vehicle's emission control system. - o Solution: Advanced diagnostic systems, such as on-board diagnostics (OBD), are employed to monitor system performance and ensure compliance with emission standards. Advanced Technologies for Emission Control in Lean Burn Engines 1. Lean NOx Trap (LNT): - o Function: Captures NOx emissions during lean operation and periodically regenerates by running the engine in a rich mode to convert the stored NOx into nitrogen and oxygen. 2. Selective Catalytic Reduction (SCR): - o Function: Uses a urea-based additive (AdBlue) to reduce NOx emissions. The additive reacts with NOx in the exhaust to form nitrogen and water. 3. Dual-Layer Catalysts: - o Function: Combines different catalyst materials to handle both HC and NOx emissions effectively, improving overall emission performance. 4. Advanced Engine Management Systems: - o Function: Optimize engine parameters such as air-fuel ratio, ignition timing, and boost pressure to reduce emissions while maintaining performance.		
8	Explain catalytic converters & How are they help full in reducing HC,CO and NOx emissions?	2	Understand

	Catalytic Converters A catalytic converter is an emission control device used in the exhaust system of internal combustion engines. Its primary purpose is to reduce the levels of harmful pollutants—specifically hydrocarbons (HC), carbon monoxide (CO), and nitrogen oxides (NOx)—before they are released into the atmosphere. How Catalytic Converters Work Catalytic converters facilitate chemical reactions that convert harmful emissions into less harmful substances. They contain a substrate coated with catalytic materials that enable these reactions. Here's a breakdown of their operation: Catalytic Materials: - o Platinum (Pt), Palladium (Pd), and Rhodium (Rh) are used as catalysts. These metals are effective in facilitating the necessary chemical reactions without being consumed in the process. Substrate: - o The substrate inside the catalytic converter provides a large surface area for the reactions. It is usually made of ceramic or metal in a honeycomb or metallic mesh structure. Chemical Reactions: - o The catalyst promotes reactions that transform pollutants into less harmful substances. These reactions occur at high temperatures as the exhaust gases pass through the converter. Reduction of Pollutants Hydrocarbons (HC): - o Problem: HC emissions are unburned or partially burned fuel that escapes from the combustion process. - o Conversion: Hydrocarbons are converted into carbon dioxide (CO2) and water (H2O). - o Reaction: $C_xH_y + O_2 \rightarrow CO_2 + H_2O$ $C_xH_y + O_2 \rightarrow CO_2 + H_2O$ Carbon Monoxide (CO): - o Problem: CO is a colorless, odorless gas that results from incomplete combustion of fuel.		
--	---	--	--

	- o Conversion: Carbon monoxide is converted into carbon dioxide (CO₂). - o Reaction: $2\text{CO} + \text{O}_2 \rightarrow 2\text{CO}_2$ 3. Nitrogen Oxides (NO_x): - o Problem: NO_x gases are produced from high-temperature combustion processes and contribute to smog and acid rain. - o Conversion: Nitrogen oxides are reduced to nitrogen (N₂) and oxygen (O₂). - o Reaction: $2\text{NO} \rightarrow \text{N}_2 + \text{O}_2$ Types of Catalytic Converters 1. Three-Way Catalytic Converter: - o Function: Handles CO, HC, and NO_x simultaneously. - o Components: ▪ Reduction Catalyst: Reduces NO_x into N₂ and O₂. ▪ Oxidation Catalyst: Converts CO and HC into CO₂ and H₂O. 2. Selective Catalytic Reduction (SCR): - o Function: Specifically targets NO_x reduction using a urea-based additive (AdBlue). - o Reaction: $4\text{NO} + 4\text{NH}_3 + \text{O}_2 \rightarrow 4\text{N}_2 + 6\text{H}_2\text{O}$ 3. Diesel Oxidation Catalyst (DOC): - o Function: Primarily used in diesel engines to oxidize CO and HC. - o Reaction: $\text{CO} + \text{O}_2 \rightarrow \text{CO}_2$ - o HC Conversion: $\text{HC} + \text{O}_2 \rightarrow \text{CO}_2 + \text{H}_2\text{O}$ Benefits of Catalytic Converters 1. Reduction in Pollutants: - o Effectiveness: Significantly reduces HC, CO, and NO_x emissions, leading to cleaner exhaust gases. 2. Environmental Protection: - o Impact: Helps in reducing the environmental impact of vehicles by lowering emissions that contribute to air pollution, smog, and acid rain.		
--	--	--	--

	3. Regulatory Compliance: - o Requirement: Meets stringent emissions regulations and standards set by environmental authorities. 4. Improved Air Quality: - o Benefit: Contributes to better air quality and public health by minimizing the release of harmful pollutants. Limitations 1. Cost: - o Expense: Catalytic converters can be expensive to replace due to the precious metals used in their construction. 2. Performance Impact: - o Potential: May cause a slight reduction in engine performance due to increased exhaust backpressure. 3. Maintenance: - o Care: Requires proper maintenance and monitoring to ensure it operates efficiently and does not become clogged or damaged.		
--	---	--	--

--	--	--	--

UNIT 5: ALTERNATE FUELS

Introduction to alternate fuels-biofuels, thermochemical and biochemical conversion, Vegetable oils and Biodiesel, Ethanol, LPG, Natural gas, Hydrogen-Production and Utilization perspective.

Part A (2 marks)

Q.No	Question	BT Level*	Competence [#]
1	Write the advantage and disadvantage of alcohol as a fuel. Advantages and Disadvantages of Alcohol as a Fuel Advantages: 1. Renewable Resource: Alcohol can be produced from biomass, making it a renewable energy source.	1	Remember

	2. Cleaner Combustion: Produces fewer harmful emissions compared to gasoline, including lower NO_x and particulate matter. Disadvantages: 1. Lower Energy Density: Alcohol fuels have a lower energy content per unit volume than gasoline, leading to lower fuel economy. 2. Corrosive Nature: Alcohols can be corrosive to certain materials used in fuel systems and engines, requiring modifications.		
2	Write the sources for methanol? Sources for Methanol • Natural Gas: The primary feedstock for methanol production through steam methane reforming. • Coal: Methanol can be produced from coal via gasification. • Biomass: Methanol can be derived from the gasification of biomass. • CO₂ and Hydrogen: Methanol can be synthesized from carbon dioxide and hydrogen through catalytic processes.	2	Understand
3	Define Biogas properties. Biogas Properties • Composition: Mainly composed of methane (CH₄) and carbon dioxide (CO₂), with trace amounts of hydrogen sulfide (H₂S), moisture, and other gases. • Calorific Value: Approximately 20-25 MJ/m³, depending on the methane content. • Density: Typically around 1.2 kg/m³. Combustion Characteristics: Burns cleanly with low emissions of particulates and NO_x	1	Remember
4	List the advantages of hydrogen as an IC engine fuel. Advantages of Hydrogen as an IC Engine Fuel	2	Understand

	● Zero Emissions: Produces only water vapor as a byproduct, resulting in zero CO₂ and pollutant emissions. ● High Energy Density: Hydrogen has a high energy content per unit mass. ● Renewable: Can be produced from water through electrolysis using renewable energy sources. ● Clean Combustion: Results in lower NO_x emissions compared to hydrocarbon fuels.		
5	List the advantages and disadvantages of natural Gas. Advantages and Disadvantages of Natural Gas Advantages: 1. Lower Emissions: Produces fewer pollutants compared to gasoline and diesel. 2. Abundant Supply: Widely available with large reserves. 3. Cost-Effective: Often cheaper than gasoline and diesel. 4. High Octane Rating: Allows for higher compression ratios and improved engine efficiency. Disadvantages: 1. Storage and Distribution: Requires high-pressure storage and special refueling infrastructure. 2. Lower Energy Density: Provides less energy per unit volume compared to liquid fuels. 3. Engine Modifications: Engines may require modifications to run on natural gas. 4. Methane Leakage: Methane is a potent greenhouse gas, and leaks during extraction and distribution can negate some environmental benefits.	1	Remember
6	Write about LPG & LNG used in automobiles engine. LPG & LNG Used in Automobiles Engine LPG (Liquefied Petroleum Gas): A mixture of propane and butane used as an alternative fuel for internal combustion engines. It is stored under pressure in liquid form and vaporizes when released for use.	1	Remember

	LNG (Liquefied Natural Gas): Natural gas that has been cooled to a liquid state at about -162°C. Used primarily in heavy-duty vehicles due to its high energy density and cleaner combustion compared to diesel.		
7	What are the advantages of LPG? Advantages of LPG 1. Lower Emissions: Produces fewer pollutants and greenhouse gases compared to gasoline and diesel. 2. Cost-Effective: Often cheaper than traditional fuels. 3. High Octane Rating: Provides better anti-knock properties. 4. Availability: Widely available with established infrastructure.	1	Remember
8	Write the disadvantages of LPG? Disadvantages of LPG 1. Storage: Requires pressurized tanks for storage, which can be bulky. 2. Energy Density: Lower energy content per unit volume compared to gasoline. 3. Infrastructure: Limited refueling infrastructure in some areas. 4. Engine Compatibility: Engines may require modifications to run efficiently on LPG.	1	Remember
9	Compare the petrol and LPG? Compare Petrol and LPG Petrol: • Higher energy density. • Widely available with extensive refueling infrastructure. • Higher emissions of CO2 and pollutants. • Typically higher running costs. LPG: • Lower emissions and cleaner combustion. • Lower fuel cost.	1	Remember

	• Requires pressurized storage tanks. • Slightly lower energy density, resulting in higher consumption.		
10	List out the benefits of natural gas? Benefits of Natural Gas 1. Lower Emissions: Produces fewer pollutants and greenhouse gases. 2. Cost Savings: Often cheaper than gasoline and diesel. 3. Abundant Supply: Large reserves and widespread availability. 4. High Octane Rating: Suitable for high-efficiency engines.	2	Understand
11	What is dual fuel operation? Dual Fuel Operation Dual fuel operation involves using two different fuels simultaneously or alternately in an engine, commonly a combination of a primary fuel (like diesel) and a secondary fuel (like natural gas or hydrogen). This approach aims to enhance fuel efficiency, reduce emissions, and provide operational flexibility.	1	Remember
12	Define miscellaneous properties of SI engine fuels. Miscellaneous Properties of SI Engine Fuels • Volatility: Ability to vaporize and mix with air for efficient combustion. • Octane Rating: Resistance to knocking and pre-ignition. • Energy Content: Amount of energy released per unit volume or mass. • Combustion Temperature: Temperature at which the fuel burns. • Stoichiometric Air-Fuel Ratio: The ideal ratio of air to fuel for complete combustion.	1	Remember
13	Define Biodiesel properties. Biodiesel Properties • Composition: Made from vegetable oils or animal fats through transesterification.	1	Remember

	• Renewable: Derived from biological sources. • Biodegradable: Breaks down naturally in the environment. • Lower Emissions: Produces fewer pollutants compared to petroleum diesel. • Lubricity: Provides better lubrication, reducing engine wear.		
14	Define biochemical conversion. Biochemical Conversion Biochemical conversion involves using biological processes, such as anaerobic digestion or fermentation, to convert organic materials (like biomass) into energy-rich fuels or chemicals, such as biogas or ethanol.	1	Remember
15	Define thermo chemical. Thermochemical Conversion Thermochemical conversion involves using heat and chemical processes, such as gasification, pyrolysis, or combustion, to convert organic materials into energy-rich fuels or chemicals, like syngas or bio-oil.	1	Remember
Part B (16 marks)			
Q.No	Question	BT Level*	Competence[#]
1	Explain the need of alternate fuels in the field of automobiles with valid points. The need for alternate fuels in the field of automobiles is driven by several critical factors that address environmental, economic, and energy security concerns. Here are the key points: Environmental Concerns 1. Reduction of Greenhouse Gas Emissions: Alternate fuels like electricity, hydrogen, and biofuels generally produce fewer greenhouse gases compared to conventional fossil fuels. This helps mitigate climate change. 2. Lower Pollutant Emissions: Many alternate fuels produce fewer harmful pollutants such as NO_x, SO_x, particulate	1	Remember

	matter, and volatile organic compounds, contributing to improved air quality and public health. Economic Factors 1. Fuel Cost Savings: Some alternate fuels, such as natural gas and electricity, can be cheaper than gasoline and diesel, leading to cost savings for consumers and businesses. 2. Price Stability: Alternate fuels can help stabilize fuel prices as they are often less affected by geopolitical events that cause fluctuations in oil prices. Energy Security 1. Diversification of Energy Sources: Using a variety of fuels reduces dependence on any single energy source, enhancing energy security and reducing vulnerability to supply disruptions. 2. Domestic Production: Many alternate fuels, like biofuels and electricity, can be produced domestically, reducing reliance on imported oil and enhancing national energy independence. Technological Advancements 1. Improved Engine Efficiency: Alternate fuels can enhance engine performance and efficiency. For example, hydrogen fuel cells and electric motors are more efficient than internal combustion engines. 2. Innovations in Vehicle Design: The shift to alternate fuels has spurred innovations in vehicle design and technology, such as electric drivetrains, lightweight materials, and advanced battery systems. Resource Sustainability 1. Renewable Resources: Many alternate fuels are derived from renewable resources, such as solar, wind, and biomass, ensuring a sustainable supply in the long term. 2. Waste Utilization: Biofuels and biogas can be produced from agricultural waste, municipal waste, and other organic materials, turning waste into valuable energy resources. Regulatory and Policy Drivers		
--	---	--	--

	1. Government Incentives: Many governments offer incentives such as tax credits, rebates, and subsidies to promote the adoption of alternate fuels and reduce the overall environmental impact. 2. Emissions Regulations: Stricter emissions regulations and standards are pushing manufacturers to develop and adopt cleaner technologies and fuels. Global Trends 1. Paris Agreement: International commitments to reduce carbon emissions and combat climate change are driving the adoption of alternate fuels worldwide. 2. Public Awareness: Increasing public awareness of environmental issues and the benefits of alternate fuels is driving demand for cleaner, sustainable transportation options. Resilience to Market Changes 1. Resilience to Oil Market Volatility: By diversifying the fuel mix, economies can become more resilient to oil market volatility and potential crises. 2. Sustainable Economic Growth: Developing and investing in alternate fuels can drive sustainable economic growth by creating new industries and job opportunities. In summary, the shift towards alternate fuels in the automotive sector is essential for addressing environmental challenges, achieving economic benefits, enhancing energy security, fostering technological innovation, and ensuring sustainable resource use.		
2	Briefly explain about thermo chemical and biochemical conversion. Thermochemical Conversion Thermochemical conversion involves the use of heat and chemical processes to transform organic materials (such as biomass) into energy-rich fuels and chemicals. Key processes include: 1. Gasification: - o Process: Converts organic materials into syngas (a mixture of carbon monoxide, hydrogen, and carbon dioxide) by reacting the material at high temperatures with a controlled amount of oxygen or steam.	1	Remember

	- o Products: Syngas can be used to produce electricity, heat, hydrogen, or synthetic fuels. 2. Pyrolysis: - o Process: Decomposes organic materials at high temperatures in the absence of oxygen to produce bio-oil, syngas, and char. - o Products: Bio-oil can be refined into biofuels, syngas can be used for energy, and char can be used as a soil amendment. 3. Combustion: - o Process: Burns organic materials in the presence of oxygen to produce heat, which can be used to generate electricity. - o Products: Primarily heat, along with carbon dioxide and water vapor. 4. Liquefaction: - o Process: Converts biomass into liquid biofuels at high pressure and moderate temperatures, often using a solvent. - o Products: Bio-crude oil that can be refined into various fuels. Biochemical Conversion Biochemical conversion uses biological processes to break down organic materials into simpler substances and convert them into energy-rich fuels and chemicals. Key processes include: 1. Anaerobic Digestion: - o Process: Microorganisms break down organic materials in the absence of oxygen to produce biogas (mainly methane and carbon dioxide) and digestate (a nutrient-rich residue). - o Products: Biogas can be used for heating, electricity generation, or as a vehicle fuel. Digestate can be used as fertilizer. 2. Fermentation: - o Process: Microorganisms (yeasts or bacteria) convert sugars and starches in biomass into ethanol or other alcohols. - o Products: Ethanol can be used as a biofuel for vehicles or as an industrial chemical. Other alcohols and by-products can be used in various applications. 3. Enzymatic Hydrolysis: - o Process: Enzymes break down complex carbohydrates (cellulose and hemicellulose) in		
--	--	--	--

	biomass into simple sugars, which can then be fermented into biofuels like ethanol. - o Products: Simple sugars for fermentation, leading to biofuels or other biochemical products. 4. Composting: - o Process: Microorganisms decompose organic matter aerobically to produce compost, which can be used as a soil conditioner. - o Products: Compost, which enhances soil health and fertility. Both thermochemical and biochemical conversion processes play crucial roles in transforming biomass into usable energy and products, contributing to renewable energy production and waste management.		
3	Explain the reasons for looking for alternate fuels for IC engines. The search for alternate fuels for internal combustion (IC) engines is driven by several important reasons, each addressing specific challenges and opportunities related to energy, environment, economy, and technology. Here are the key reasons: Environmental Concerns 1. Reduction of Greenhouse Gas Emissions: - o Conventional fossil fuels (gasoline and diesel) are major sources of CO₂, a greenhouse gas contributing to climate change. - o Alternate fuels like biofuels, hydrogen, and electricity from renewable sources can significantly reduce carbon footprints. 2. Lower Pollutant Emissions: - o IC engines running on gasoline and diesel emit pollutants like NO_x, SO_x, particulate matter, and volatile organic compounds (VOCs), contributing to air pollution and health issues. - o Alternate fuels such as natural gas, LPG, and biofuels produce fewer pollutants, leading to cleaner air and improved public health. Economic Factors 1. Fuel Cost Savings:	2	Understand

	- o Some alternate fuels, such as natural gas and electricity, can be more cost-effective compared to traditional fuels, leading to operational savings for consumers and businesses. 2. Price Stability: - o Alternate fuels can help stabilize fuel prices, as they are often less susceptible to geopolitical events that cause fluctuations in oil prices. Energy Security 1. Diversification of Energy Sources: - o Relying on a variety of energy sources reduces dependence on any single fuel, enhancing energy security and reducing vulnerability to supply disruptions. 2. Domestic Production: - o Many alternate fuels, like biofuels, electricity, and hydrogen, can be produced domestically, reducing reliance on imported oil and enhancing national energy independence. Technological Advancements 1. Improved Engine Efficiency: - o Alternate fuels can enhance engine performance and efficiency. For example, hydrogen fuel cells and electric drivetrains are more efficient than traditional internal combustion engines. 2. Innovations in Vehicle Design: - o The shift to alternate fuels has spurred innovations in vehicle design and technology, such as lightweight materials, advanced battery systems, and new engine architectures. Resource Sustainability 1. Renewable Resources: - o Many alternate fuels are derived from renewable resources, such as solar, wind, and biomass, ensuring a sustainable supply in the long term. 2. Waste Utilization: - o Biofuels and biogas can be produced from agricultural waste, municipal waste, and other		
--	---	--	--

	organic materials, turning waste into valuable energy resources. Regulatory and Policy Drivers Government Incentives: - Many governments offer incentives such as tax credits, rebates, and subsidies to promote the adoption of alternate fuels and reduce the overall environmental impact. Emissions Regulations: - Stricter emissions regulations and standards are pushing manufacturers to develop and adopt cleaner technologies and fuels. Global Trends Paris Agreement: - International commitments to reduce carbon emissions and combat climate change are driving the adoption of alternate fuels worldwide. Public Awareness: - Increasing public awareness of environmental issues and the benefits of alternate fuels is driving demand for cleaner, sustainable transportation options. Resilience to Market Changes Resilience to Oil Market Volatility: - By diversifying the fuel mix, economies can become more resilient to oil market volatility and potential crises. Sustainable Economic Growth: - Developing and investing in alternate fuels can drive sustainable economic growth by creating new industries and job opportunities.		
4	What are the advantages and disadvantages of using hydrogen in SI engine? Advantages of Using Hydrogen in SI (Spark Ignition) Engines Zero Carbon Emissions: Benefit: When hydrogen is burned, it produces only water vapor as a byproduct, eliminating carbon	2	Understand

	dioxide emissions and contributing to climate change mitigation. 2. High Energy Density: - o Benefit: Hydrogen has a high energy content per unit mass, which can potentially lead to higher efficiency and performance compared to traditional fuels. 3. Renewable Source: - o Benefit: Hydrogen can be produced from renewable energy sources such as solar, wind, and hydropower through electrolysis, making it a sustainable fuel option. 4. Cleaner Combustion: - o Benefit: Hydrogen combustion produces fewer pollutants like NOx and particulate matter compared to gasoline and diesel, leading to improved air quality. 5. Wide Range of Operating Conditions: - o Benefit: Hydrogen can be used efficiently across a wide range of engine operating conditions due to its high flame speed and wide flammability range. 6. Energy Security: - o Benefit: Hydrogen can be produced domestically from various resources, reducing dependence on imported oil and enhancing national energy security. Disadvantages of Using Hydrogen in SI Engines 1. Storage and Distribution Challenges: - o Issue: Hydrogen has a low energy density by volume, requiring high-pressure or cryogenic storage, which complicates infrastructure and vehicle design. 2. Hydrogen Embrittlement: - o Issue: Hydrogen can cause embrittlement of metals, leading to potential durability and safety concerns in engine components and storage systems. 3. Production Costs: - o Issue: Current methods of hydrogen production, especially from renewable sources, can be expensive compared to conventional fuels, posing economic challenges. 4. NOx Emissions: - o Issue: While hydrogen combustion produces fewer overall pollutants, high combustion temperatures can still lead to the formation of nitrogen oxides (NOx), which are harmful pollutants. 5. Infrastructure Development:		
--	--	--	--

	- o Issue: A significant investment is required to develop a widespread hydrogen refueling infrastructure, which is currently limited compared to gasoline and diesel networks. 6. Fuel Handling and Safety: - o Issue: Hydrogen is highly flammable and has a wide flammability range, requiring stringent safety measures for storage, handling, and refueling to prevent accidents. 7. Engine Modifications: - o Issue: Existing SI engines require modifications to run efficiently on hydrogen, including changes to the fuel delivery system, ignition system, and materials to handle hydrogen's properties.		
5	Briefly explain about the Natural gas and Hydrogen & what are the advantages and disadvantages of it? Natural Gas Natural gas is a fossil fuel composed mainly of methane (CH₄) and is used as an energy source for heating, electricity generation, and as a fuel for vehicles. Advantages of Natural Gas 1. Lower Emissions: - o Produces fewer greenhouse gases and pollutants such as NO_x, SO_x, and particulate matter compared to gasoline and diesel. 2. Cost-Effective: - o Often cheaper than conventional fuels, providing cost savings for consumers and businesses. 3. Abundant Supply: - o Widely available with extensive reserves, ensuring a reliable supply. 4. High Octane Rating: - o Offers better anti-knock properties, allowing for higher compression ratios and improved engine efficiency. 5. Infrastructure: - o Established distribution network in many regions, making it accessible for various applications.	2	Understand

	Disadvantages of Natural Gas Storage and Distribution: - Requires high-pressure storage and specialized refueling infrastructure, which can be costly and complex. Lower Energy Density: - Provides less energy per unit volume compared to liquid fuels, leading to higher fuel consumption. Methane Leakage: - Methane is a potent greenhouse gas, and leaks during extraction, distribution, and use can negate some environmental benefits. Engine Modifications: - Vehicles may need modifications to run on natural gas, including changes to the fuel system and engine components. Non-Renewable: - Despite being cleaner than other fossil fuels, natural gas is still a non-renewable resource with finite reserves. Hydrogen Hydrogen is a clean fuel that, when used in a fuel cell or combusted, produces only water as a byproduct. It can be produced from various sources, including natural gas, water (via electrolysis), and biomass. Advantages of Hydrogen Zero Carbon Emissions: - Produces only water vapor when used, eliminating CO₂ emissions. High Energy Density: - High energy content per unit mass can lead to higher efficiency and performance. Renewable Production: - Can be produced from renewable energy sources, making it a sustainable option. Cleaner Combustion: - Generates fewer pollutants like NO_x and particulate matter, improving air quality. Energy Security: - Can be produced domestically from various resources, reducing dependence on imported oil.		
--	---	--	--

	Disadvantages of Hydrogen Storage and Distribution Challenges: - Low energy density by volume requires high-pressure or cryogenic storage, complicating infrastructure and vehicle design. Hydrogen Embrittlement: - Can cause embrittlement of metals, leading to potential durability and safety concerns. Production Costs: - Current production methods, especially from renewable sources, can be expensive compared to conventional fuels. NOx Emissions: - High combustion temperatures can still lead to the formation of nitrogen oxides (NOx), which are harmful pollutants. Infrastructure Development: - Significant investment is required to develop a widespread hydrogen refueling infrastructure. Fuel Handling and Safety: - Highly flammable with a wide flammability range, requiring stringent safety measures for storage, handling, and refueling. Engine Modifications: - Existing engines require modifications to run efficiently on hydrogen, including changes to the fuel delivery system, ignition system, and materials to handle hydrogen's properties.		
6	Explain alcohols as alternate fuels for IC engines bringing out their merits and demerits. Alcohols as Alternative Fuels for IC Engines Alcohols such as methanol and ethanol are being considered as alternative fuels for internal combustion (IC) engines due to their potential environmental and performance benefits. Here's a detailed look at their merits and demerits: Merits of Alcohols as Fuels Renewable Resource: Benefit: Alcohols can be produced from renewable sources like biomass, agricultural waste, and even	1	Remember

	municipal solid waste, reducing reliance on fossil fuels. Cleaner Combustion: Benefit: Alcohols burn more cleanly than gasoline or diesel, producing fewer harmful emissions such as carbon monoxide (CO), nitrogen oxides (NO_x), and particulate matter (PM). Higher Octane Rating: Benefit: Alcohols have higher octane numbers compared to gasoline, which helps in reducing engine knocking and allows for higher compression ratios, improving engine efficiency and performance. Biodegradability: Benefit: Alcohols are biodegradable and less toxic than gasoline or diesel, posing less risk to the environment in the event of spills. Reduction in Greenhouse Gas Emissions: Benefit: Using alcohols can reduce the net emissions of CO₂, especially if produced from renewable resources, contributing to the mitigation of climate change. Cooling Effect: Benefit: Alcohol fuels have a higher latent heat of vaporization, which can help cool the intake charge and improve volumetric efficiency. Demerits of Alcohols as Fuels Lower Energy Density: Issue: Alcohols have lower energy content per unit volume than gasoline or diesel, resulting in lower fuel economy and higher consumption rates. Corrosiveness: Issue: Alcohols can be corrosive to certain materials used in fuel systems, such as aluminum and some plastics, necessitating modifications and the use of compatible materials. Water Absorption: Issue: Alcohols are hygroscopic, meaning they absorb water from the atmosphere, which can lead to fuel contamination and phase separation, potentially causing engine performance issues. Production Costs: Issue: Producing alcohols, especially from non-food biomass, can be expensive and may require		
--	---	--	--

	significant energy inputs, impacting the overall economic viability. 5. Infrastructure and Compatibility: - o Issue: Existing fuel infrastructure may need modifications to handle alcohol fuels, including storage, distribution, and dispensing systems. Additionally, engines may need adjustments or redesigns to run efficiently on alcohols. 6. Cold Start Issues: - o Issue: Alcohols, particularly methanol, can cause difficulties in cold starting due to their lower vapor pressures at low temperatures. 7. Limited Availability: - o Issue: The widespread availability of alcohol fuels is still limited compared to conventional fuels, impacting their immediate adoption and use.		
7	Discuss about LPG as fuel in vehicles & what are the advantages and disadvantages of it? LPG (Liquefied Petroleum Gas) as a Vehicle Fuel Liquefied Petroleum Gas (LPG) is a mixture of propane (C_3H_8) and butane (C_4H_{10}) that is used as an alternative fuel for vehicles. It is stored in liquid form under pressure in tanks and vaporized for use in internal combustion engines. Advantages of LPG as a Fuel 1. Lower Emissions: - o Benefit: LPG combustion produces fewer pollutants compared to gasoline and diesel, including reduced carbon monoxide (CO), nitrogen oxides (NO_x), and particulate matter. It also emits less carbon dioxide (CO₂), making it a cleaner option. 2. Cost-Effective: - o Benefit: LPG is generally cheaper than gasoline or diesel, leading to lower fuel costs for consumers. The price stability of LPG can also be advantageous compared to volatile oil markets. 3. High Octane Rating: - o Benefit: LPG has a higher octane rating than gasoline, which can lead to improved engine performance and efficiency due to reduced knocking and the ability to run at higher compression ratios. 4. Reduced Engine Wear:	2	Understand

	- o Benefit: LPG burns cleaner than gasoline, resulting in less carbon build-up and reduced engine wear. This can lead to longer engine life and reduced maintenance costs. 5. Infrastructure: - o Benefit: LPG infrastructure, including refueling stations, is well-established in many regions, making it accessible for a significant number of vehicles. 6. Safety: - o Benefit: LPG is stored in tanks designed with multiple safety features to prevent leaks and ensure safe handling. The fuel's properties make it less likely to cause dangerous vapor leaks compared to some other fuels. Disadvantages of LPG as a Fuel 1. Lower Energy Density: - o Issue: LPG has a lower energy density compared to gasoline and diesel, which results in lower fuel economy and reduced driving range per unit volume. 2. Storage Space: - o Issue: LPG requires larger storage tanks compared to gasoline, which can take up more space in the vehicle and potentially reduce cargo capacity or interior space. 3. Limited Availability: - o Issue: While LPG infrastructure is well-developed in some regions, it is still limited in others. This can impact the convenience of refueling, especially in areas with fewer LPG stations. 4. Engine Conversion Costs: - o Issue: Converting a vehicle to run on LPG requires modifications to the fuel system and engine, which can involve additional costs and may affect the vehicle's warranty. 5. Lower Power Output: - o Issue: Vehicles running on LPG may experience a slight reduction in power output compared to when running on gasoline, which can affect performance. 6. Environmental Impact of Production: - o Issue: While LPG is cleaner than gasoline and diesel, it is still a fossil fuel. The production and extraction processes contribute to greenhouse gas emissions and environmental impact. 7. Cold Weather Performance:		
--	--	--	--

	o Issue: In very cold climates, LPG can have issues with vaporization, which can affect engine starting and performance.		
8	Briefly explain about Production and Utilization perspective. Production Perspective Production perspective refers to the processes and considerations involved in the creation and supply of a fuel or energy source. This includes: 1. Raw Material Sourcing: - o Consideration: Identifying and obtaining the raw materials needed for fuel production, such as crude oil for gasoline, natural gas for LNG, or biomass for biofuels. 2. Processing and Refinement: - o Consideration: The methods used to convert raw materials into usable fuel. For instance, crude oil is refined into gasoline and diesel, while biomass is processed into biofuels or biogas. 3. Technology and Infrastructure: - o Consideration: The technologies and infrastructure required for production, including refineries, distilleries, and processing plants. This also involves investment in technology to improve efficiency and reduce costs. 4. Cost Factors: - o Consideration: The costs associated with production, including raw materials, labor, energy, and maintenance. Production costs can influence fuel prices and economic feasibility. 5. Environmental Impact: - o Consideration: The environmental effects of production processes, such as emissions, waste generation, and resource depletion. Sustainable production methods aim to minimize negative impacts. 6. Regulations and Standards: - o Consideration: Compliance with regulations and industry standards related to safety, quality, and environmental protection. This includes adhering to legal requirements and industry best practices.	3	Apply

	Utilization Perspective Utilization perspective focuses on how a fuel or energy source is used, including: 1. Efficiency and Performance: - o Consideration: The efficiency of energy conversion and performance in end-use applications, such as engines, power plants, or industrial processes. Higher efficiency means better energy utilization and reduced waste. 2. Infrastructure and Distribution: - o Consideration: The infrastructure required for distributing and delivering fuel to end users, including pipelines, storage facilities, and refueling stations. Effective distribution networks are crucial for accessibility. 3. Economic Viability: - o Consideration: The economic aspects of fuel utilization, including fuel costs, maintenance, and operational efficiency. Economic viability affects the adoption and competitiveness of the fuel. 4. Environmental Impact: - o Consideration: The environmental effects of fuel use, such as emissions, waste, and resource consumption. The goal is to minimize negative environmental impacts through cleaner technologies and practices. 5. Safety and Reliability: - o Consideration: Ensuring safe and reliable operation of equipment and infrastructure using the fuel. This includes managing risks, adhering to safety standards, and ensuring fuel quality. 6. End-User Acceptance: - o Consideration: The acceptance and adoption of the fuel by consumers and industries. Factors influencing acceptance include performance, cost, availability, and environmental benefits.		
--	---	--	--

* BT Levels – BTL1 to BTL6

Competence – Remember, understands, apply, analyze, evaluate and create