

## **Live Streaming Screen 15.6"**

February 7, 2025



• 1Multi-platform live • 5000 Mega Pixel broadcast

• WIFI 6

Guangdong HUSHIDA Electronic Technology Co.,Ltd.

#### Product Features

- Capacitive touch: 10-point full-fit capacitive touch screen, sensing object fingers, capacitive pen, etc.
- Multi-functional live streaming: green screen cutout, multi-camera broadcast, background texture, foreground texture, text pre-text, teleprompter, picture-in-picture, supports domestic and foreign mainstream APPs. 1080P high-definition one-click broadcast (Douyin, Kuaishou, video account, Taobao Live, Pinduoduo, Xiaohongshu, Weibo, video conference, WeChat, Facebook, tiktok, etc.). Supports the installation of various third-party Android applications. Live interaction: supports intelligent interactive application scenarios such as professional mobile broadcasting station functions
- Camera configuration: 5000W lens, supports AF ultra-fast autofocus, built-in sound pickup, and can adjust the camera up and down.
- Safety protection: The screen is made of tempered glass, with an impact resistance of more than 80MPA
- High-definition display: TFT-LCD screen, 1080P high-definition resolution, rich and vivid colors
- Network and others: Support WiFi6, wireless peripheral expansion; support Bluetooth 5.0
- Applicable scenarios: Simple operation, suitable for live broadcast rooms such as enterprises and individuals

## Specifications

#### Display

Size	15.6 inch
Backlight type	TFT-LCD
Aspect Ratio	16:9
Responsive Time	7ms
Displaty Area	344.16(H)×193.59(V)mm
Resolution	1920(H)×1080(V)
Contrast(Typ)	1200:1
Viewing Angle	178°(H/V)
Screen Brightness(Typ)	400cd/m²

# Operation System

System Version	Android 12
Ram	8G / 16G
Rom	128G / 256G
CPU	RK3588, Cortex-A76+Cortex-A55 octa-core 2.4GHz
GPU	ARM Mali-G610 MP4
NPU	6TOPS
IPS	48MP ISP with HDR&3DNR
Interfaces	LINE IN, PHONE/MIC, USB3.0*3, Gigabit Ethernet, USB3.0*1, HDMI OUT, HDMI IN*2, TYPE-C, DC
	JHUS SHUS

## Touch

ISHIDA	Туре	Capacity
AC	Touch Points	10 points
HUSHI	Touch Count	Over 60 Mega Times
2 PH	Configuration	

## Configuration

Corniguration	
Aqu	LHUS"
Camera	Built-in 5000W lens, supports AF ultra-fast auto focus, built-in sound pickup
Trumpet	6Ω4W*1
Appendix	1. Product manual*1 2. HDMI*1 3. Warranty card/certificate*1 4. Adapter*1 5. Fill light remote control*1
Network	1000M/100M adaptive Ethernet, support WiFi6, wireless peripheral expansion; support Bluetooth
P. Z.	SHIDA
Physical Parame	ters


# Physical Parameters

Meterial	Alloy
Net Weight	4kg
Gross Weight	5.8kg
Power	DC-12V input, 3A
Power consumption	25W
JEHIDA	3 HUS *

## Enviroment ZHUSHIDA

aå , Husi	
Working Temperature	0°C~40°C
Working Humidity	20%~80%RH
Stocking Temperature	-10°C~50°C
Stocking Humidity	20%~80%RH
Working Altitude	Below 5000meters
3 Husi	TISHIDA F.
Size	

#### Size

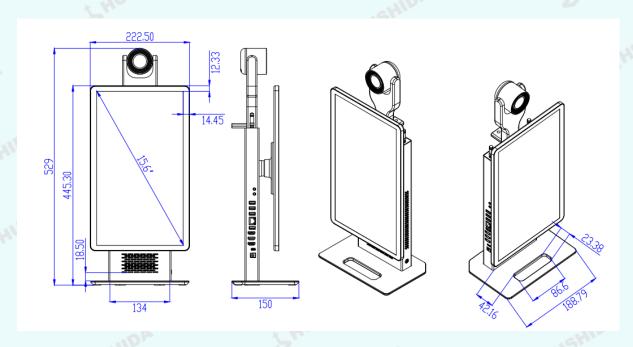

## Contact HUSHIDA Team

Email: support@hushidaglobal.com

WhatsApp: +1 909 905 7781

Phone: +86 18576560374

Website: https://hushidaglobal.com

Retail Website: https://www.hushidasmart.com

## "互动视界,智达未来"

## "Interactive Vision, Intelligent Future"

