



KONFIGURASI PERANGKAT JARINGAN MENGGUNAKAN VIRTUAL BOX


1. TAMPILAN AWAL VIRTUAL BOX

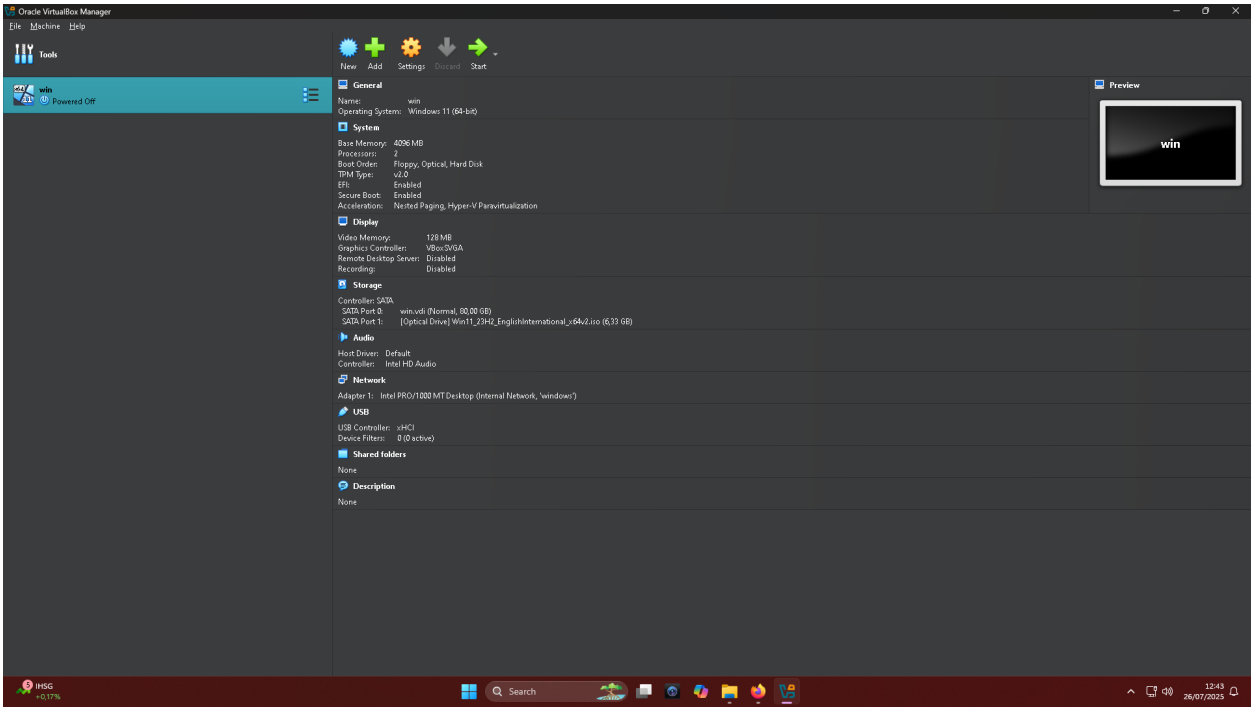


1. NEW

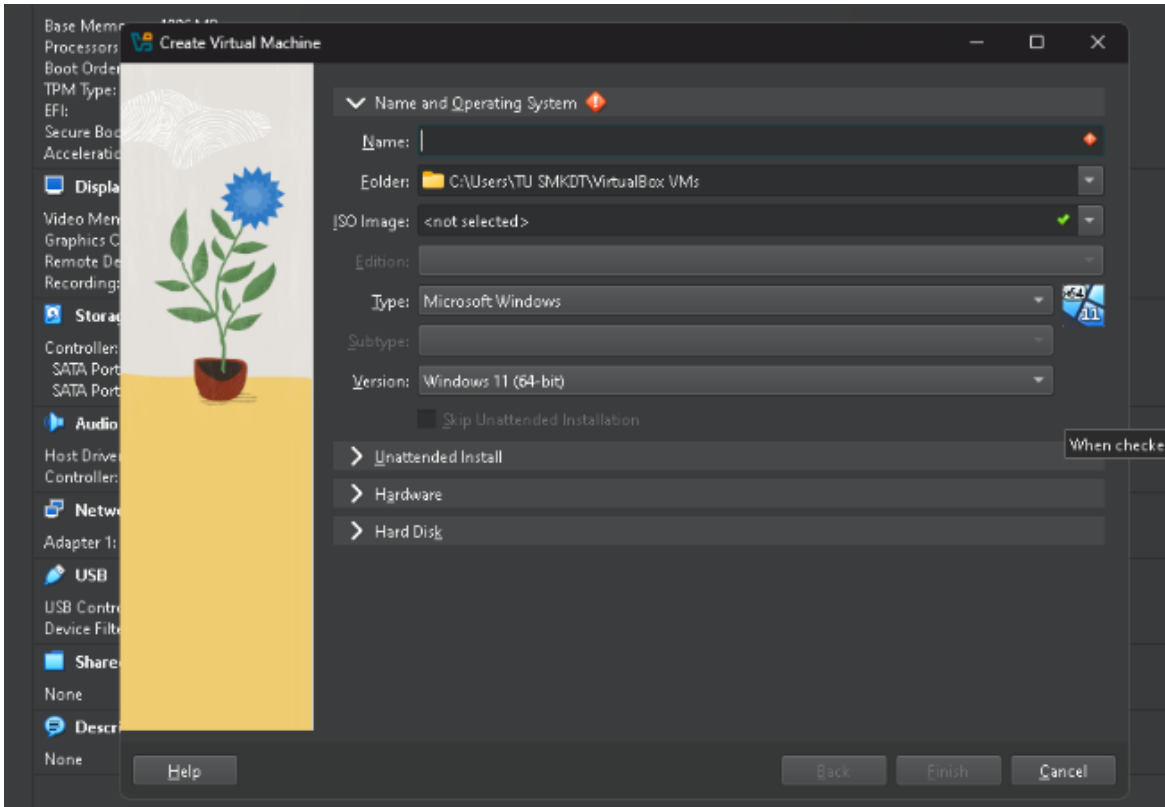


- 2. NAMA “MIKROTIK”
- 3. Finis
- 4. Pilih seting
- 5. Pilih storage – empty – optical drive pilih mikrotik

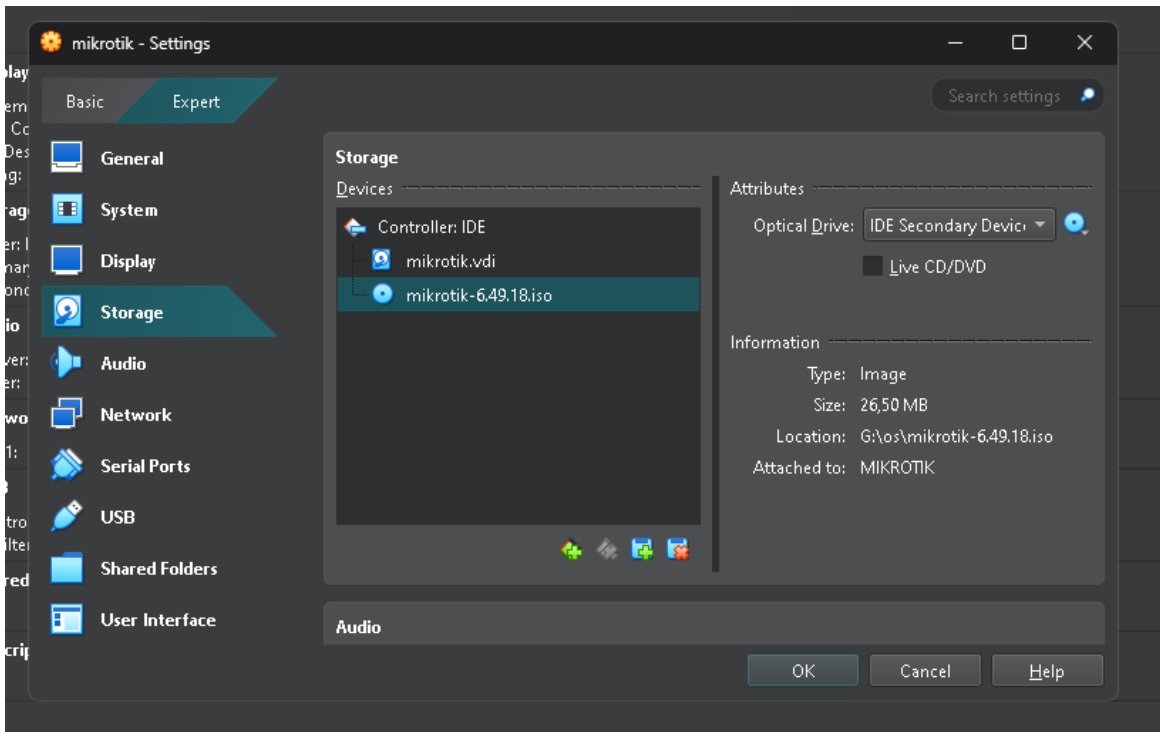


- 6. Pilih network
- 7. Enable network adapter
- 8. Pilih bridged adapter
- 9. Promiscuous mode : pilih allow all

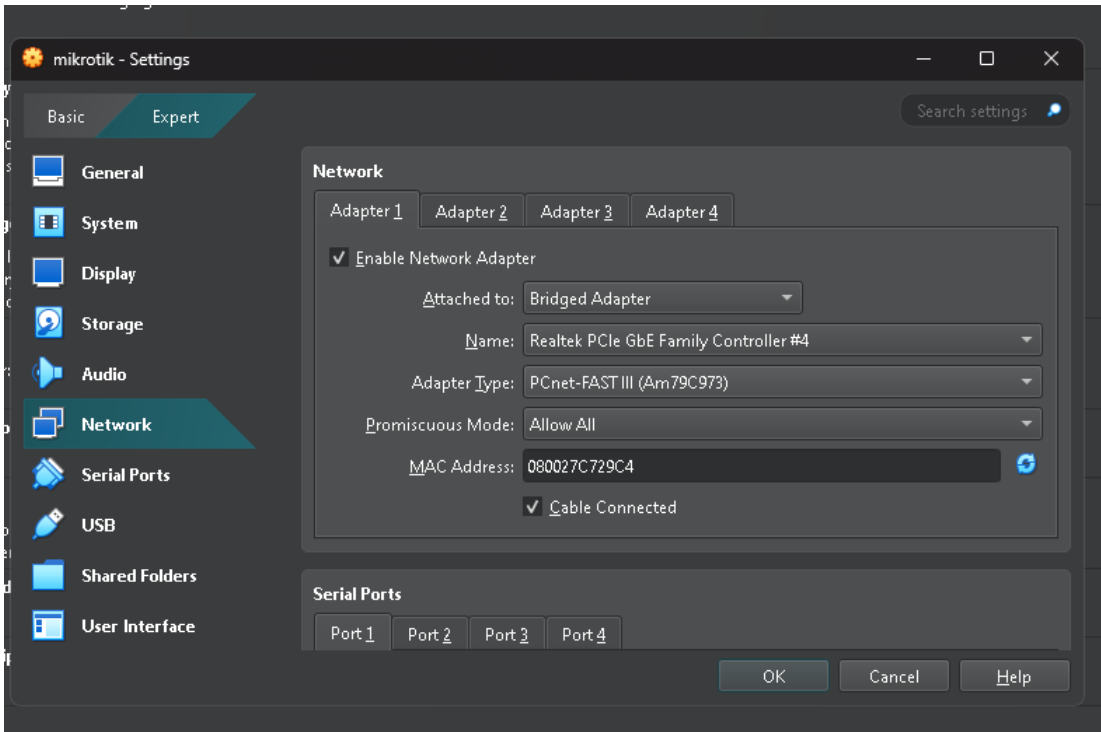



- 10. Pilih adaptor 2
- 11. Enable network adapter
- 12. Pilih host-only adaptor
- 13. Promiscuous mode : pilih allow all

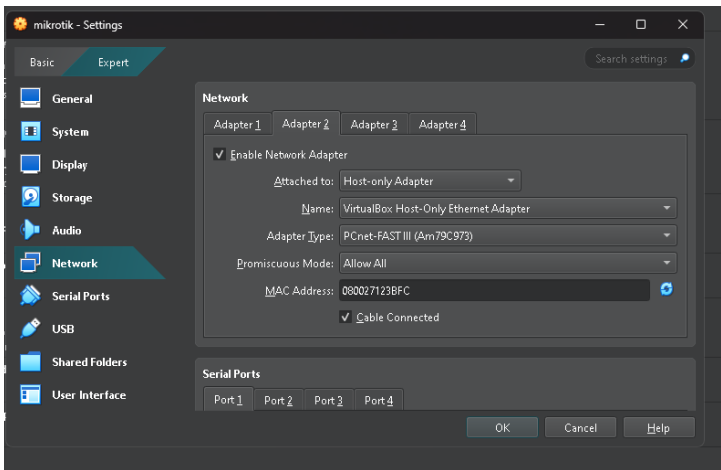

- 14. Ok
- 15. Start

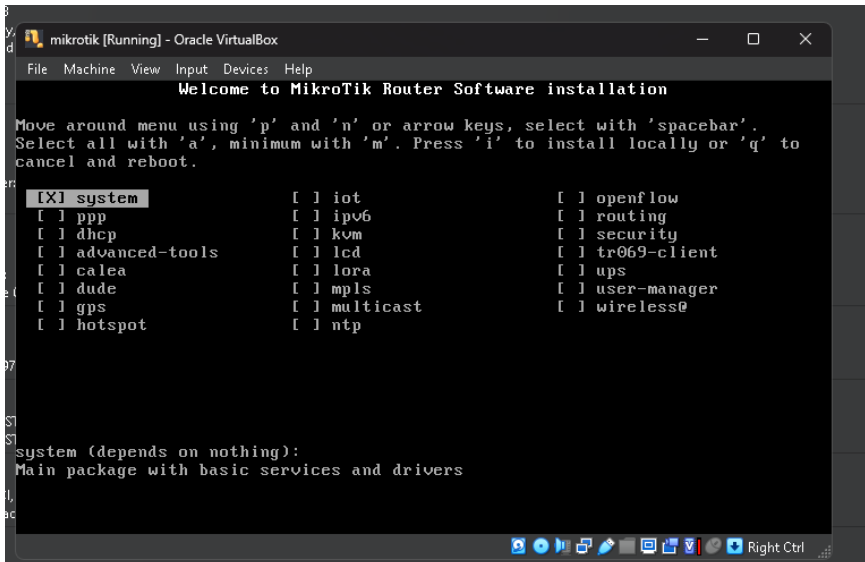

- 16. Tekan di keyboard “a”, “i”, “y”,y”

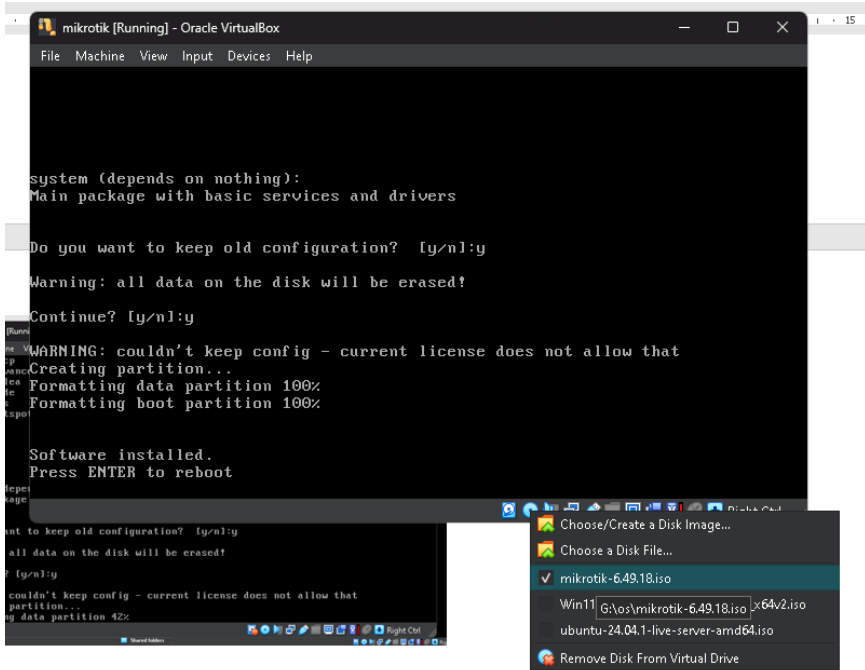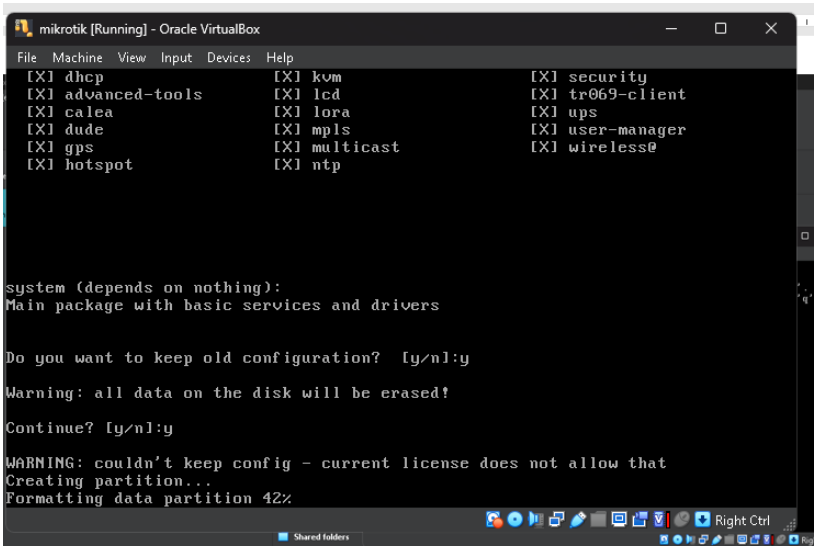

- 17. Sebelum di “enter”
- 18. Pada gambar diatas menunjukan klik kanan bulat biru pilih mikrotik untuk di dikeluarkan
- 19. Setelah itu tekan di keyboard “ENTER”
- 20. Jika sudah berhasil akan seperti dibawah ini

