




How to Setup the Audio Speakers

Depending on the speaker layout, use the following two techniques.

A) Stereo System (L + R)


Stage Layout

Use 2 audio speakers and 2 subwoofers to amplify sound. Set up one audio speaker and one subwoofer on both sides of the stage space.

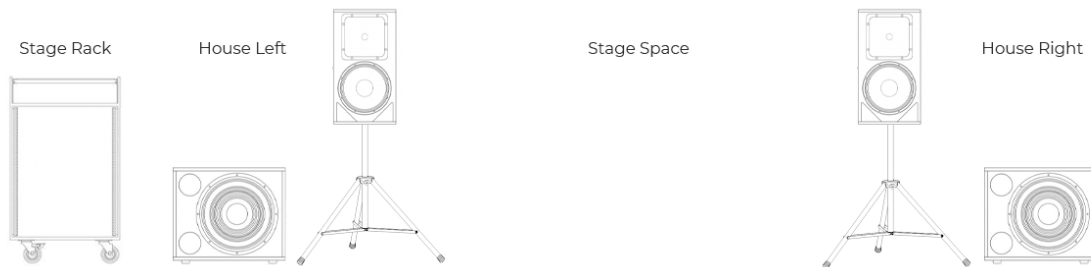


Running Power

First, run power from the Stage Rack to the closest audio speaker and subwoofer using a power extension. From there, run an additional power extension to the other side of the stage to power the remaining audio speaker and subwoofer.

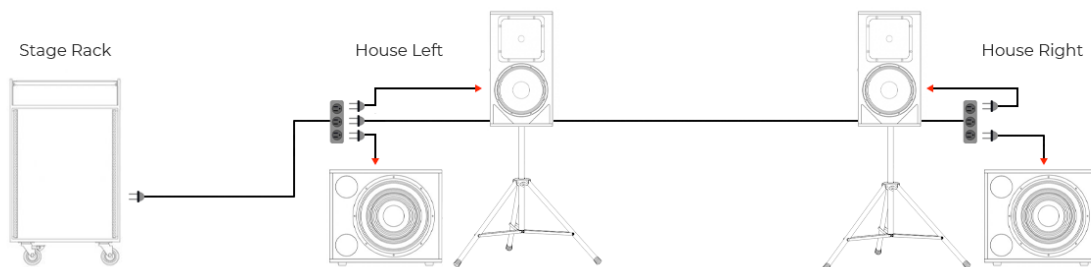

Running XLR Cables


From the Stage Rack, run 3 XLR cables from the Outputs on the Digital Snake to the speakers. Output #1 will provide audio to the House Left audio speaker. Output #2 will provide audio to the House Right speaker. Output #3 will provide audio to both sub speakers by first connecting to the closest sub speaker and then using an additional XLR cable to link to the other sub.

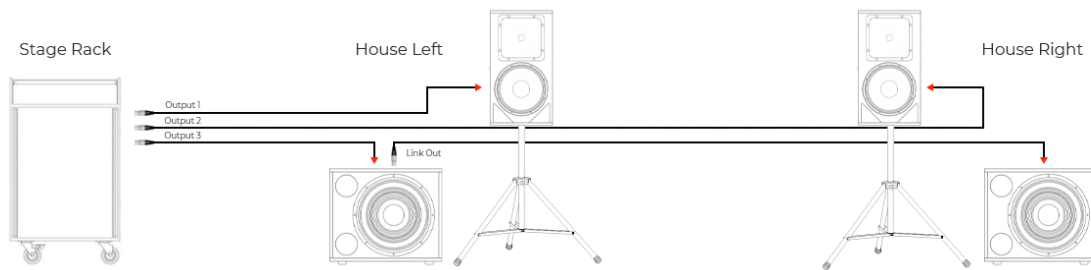

B) LCR System (L + C + R)


Stage Layout

Use 4 audio speakers and 2 subwoofers to amplify sound. Set up one audio speaker and one subwoofer on both sides of the stage space. Additionally, set up two audio speakers near the center of the stage.

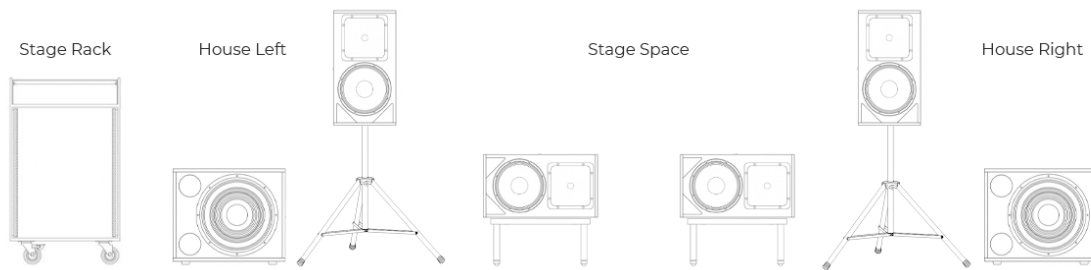

Running Power

First, run power from the Stage Rack to the closest audio speaker and subwoofer using a power extension. From there, run an additional power extension to the other side of the stage to power the remaining audio speaker and subwoofer. Ideally, the two center speakers should plug into their neighboring audio speaker and subwoofers power taps.

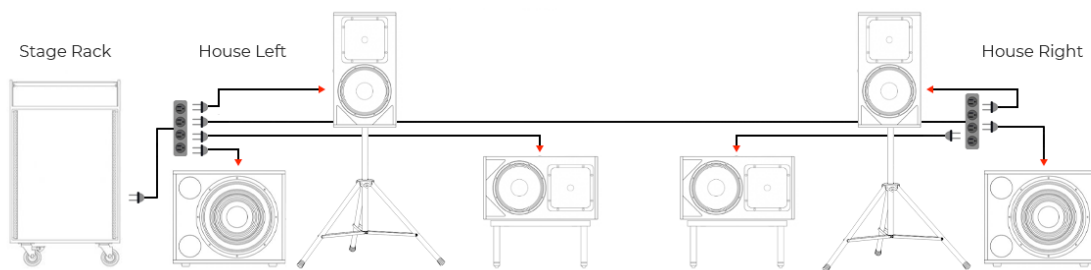

Running XLR Cables

From the Stage Rack, run 4 XLR cables from the Outputs on the Digital Snake to the speakers. Output #1 will provide audio to the House Left audio speaker. Output #2 will provide audio to the House Right speaker. Output #3 will provide audio to both center speakers by first connecting to the closest one and then using an additional XLR cable to link to the other speaker. Output #4 will provide audio to both sub speakers by first connecting to the closest sub speaker and then using an additional XLR cable to link to the other sub.

