
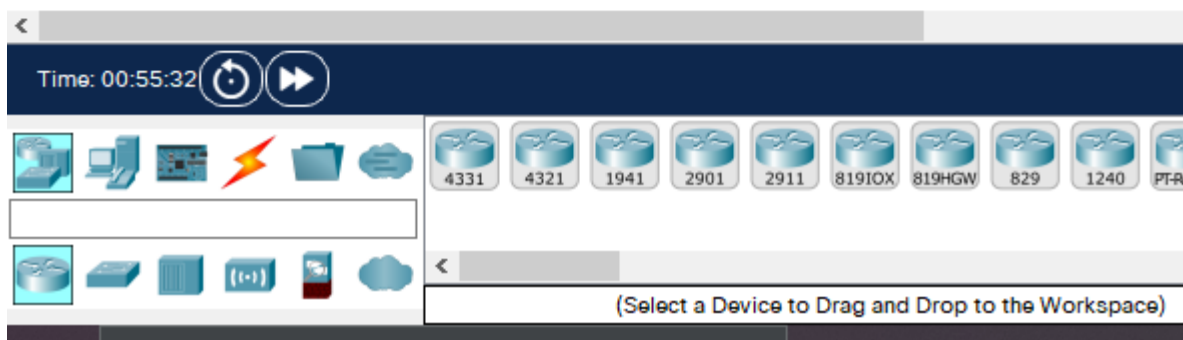
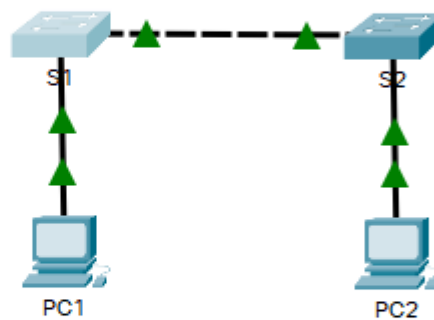


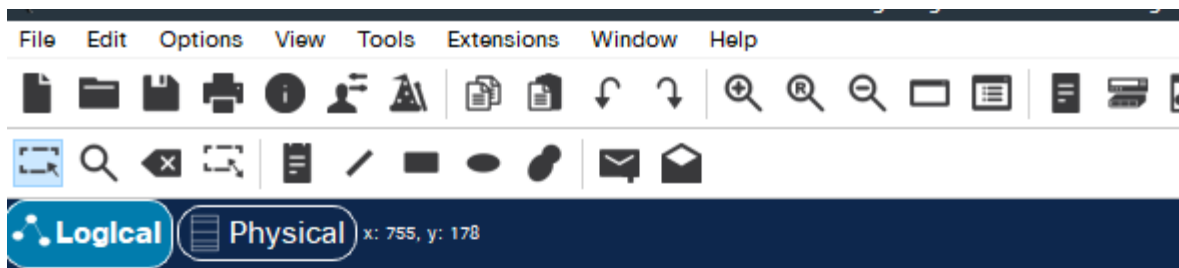

S1

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
interface Vlan1
  no ip address
  shutdown
!
!
!
!
line con 0
  password letmein
  login
!
line vty 0 4
  login
line vty 5 15
  login
!
!
!
!
end

S1#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
S1(config)#service password-encryption
S1(config)#exit
S1#
%SYS-5-CONFIG_I: Configured from console by console
```

Ctrl+F6 to exit CLI focus

Copy

Paste

☐ Top

S1

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
S1>enable
Password:
S1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
S1(config)#banner motd "This is a secure system. Authorized Access Only"
S1(config)#exit
S1#
%SYS-5-CONFIG_I: Configured from console by console

S1#show run
Building configuration...

Current configuration : 1252 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname S1
!
enable secret 5 $l$mERr$ILwq/b7kc.7X/ejA4Aosn0
enable password 7 08221D0A0A49
!
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
```

Ctrl+F6 to exit CLI focus

CopyPaste

☐ Top

IOS Command Line Interface

```
interface GigabitEthernet0/2
!
interface Vlan1
  no ip address
  shutdown
!
banner motd ^CThis is a  secure system. Authorized Access Only^C
!
!
!
line con 0
  password 7 082D495A041C0C19
  login
!
line vty 0 4
  login
line vty 5 15
  login
!
!
!
!
end

S1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
S1#copy r s
% Ambiguous command: "copy r s"
S1#show startup-config
Using 1252 bytes
!
version 12.2
```

Ctrl+F6 to exit CLI focus

Copy

Paste

```
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname S1
!
enable secret 5 $1$mERr$ILwq/b7kc.7X/ejA4Aosn0
enable password 7 08221D0A0A49
!
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
!
interface FastEthernet0/3
!
interface FastEthernet0/4
!
interface FastEthernet0/5
!
interface FastEthernet0/6
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
```

Ctrl+F6 to exit CLI focus

Copy

Paste

] Top

S1

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
!
interface FastEthernet0/22
!
interface FastEthernet0/23
!
interface FastEthernet0/24
!
interface GigabitEthernet0/1
!
interface GigabitEthernet0/2
!
interface Vlan1
  no ip address
  shutdown
!
banner motd ^CThis is a  secure system. Authorized Access Only^C
!
!
!
line con 0
  password 7 082D496A041C0C19
  login
!
line vty 0 4
  login
line vty 5 15
  login
!
!
!
end

S1#
```

Ctrl+F6 to exit CLI focus

Copy

Paste

☐ Top

IOS Command Line Interface

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname S2
S2(config)#line console 0
S2(config-line)#password letmein
S2(config-line)#login
S2(config-line)#exit
S2(config)#enable password c1$c0
S2(config)#enable secret itsasecret
S2(config)#banner motd "Authorized access is prohibited and violators will be prosecuted
to the full extent of the law"
S2(config)#service password-encryption
S2(config)#exit
S2#
%SYS-5-CONFIG_I: Configured from console by console

S2#show run
Building configuration...

Current configuration : 1298 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname S2
!
enable secret 5 $l$mERr$ILWq/b7kc.7X/ejA4Aosn0
enable password 7 08221D0A0A49
!
!
!
```

Ctrl+F6 to exit CLI focus

Copy

Paste

IOS Command Line Interface

```
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
!
interface FastEthernet0/3
!
interface FastEthernet0/4
!
interface FastEthernet0/5
!
interface FastEthernet0/6
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
!
interface FastEthernet0/10
!
interface FastEthernet0/11
!
interface FastEthernet0/12
!
interface FastEthernet0/13
!
interface FastEthernet0/14
!
interface FastEthernet0/15
!
interface FastEthernet0/16
```

Ctrl+F6 to exit CLI focus

Copy

Paste

IOS Command Line Interface

```
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
!
interface FastEthernet0/3
!
interface FastEthernet0/4
!
interface FastEthernet0/5
!
interface FastEthernet0/6
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
!
interface FastEthernet0/10
!
interface FastEthernet0/11
!
interface FastEthernet0/12
!
interface FastEthernet0/13
!
interface FastEthernet0/14
!
interface FastEthernet0/15
!
interface FastEthernet0/16
!
```

Ctrl+F6 to exit CLI focus

Copy

Paste

IOS Command Line Interface

```
interface GigabitEthernet0/1
!
interface GigabitEthernet0/2
!
interface Vlan1
  no ip address
  shutdown
!
banner motd ^CAuthorized access is prohibited and violators will be prosecuted to the
full extent of the law^C
!
!
!
line con 0
  password 7 082D495A041C0C19
  login
!
line vty 0 4
  login
line vty 5 15
  login
!
!
!
end

S2#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
S2#exit
```

Ctrl+F6 to exit CLI focus

Copy

Paste