



SERVICE BULLETIN

Marvel: Contest of Champions

Art and software update kit

Importance: High

October 24, 2024

Kit contents:

- (1) Lower marquee translite, large Marvel logo edition (part #: R90-13-211)
- (1) Speaker panel translite, large Marvel logo edition (part #: R90-13-212)
- (1) Upper marquee, large Marvel logo edition (part #: R90-13-213)
- (1) USB drive with Marvel: Contest of Champions software, v1.781
- (1) Series 3 promotional banner coupon (part #: R90-12-15)


Required tools:

- Drill or multi-bit screwdriver
- T-15 & T-27 Torx tamperproof bits
- Socket wrench
- $\frac{3}{8}$ " socket




Art installation procedure:

- 1.) Using a $\frac{3}{8}$ " socket, loosen the (4) flanged hex head screws that secure the upper marquee assembly to the top of the cabinet
- 2.) Slide the upper marquee assembly off the top of the cabinet, set it down, and then remove the (6) screws and washers securing the upper marquee to the upper marquee mounting brackets using a T-27 Torx tamperproof bit
- 3.) Install the upper marquee mounting brackets to the back of the new upper marquee included in the kit using the (6) screws and washers that were just removed. Lift the new upper marquee assembly, rest it on top of the cabinet, and slide it forward such that the flanged hex head screws pass through the new upper marquee assembly and make contact with the end of the slots in the bottom of the brackets
- 4.) Tighten the (4) flanged hex head screws to secure the new upper marquee assembly into place

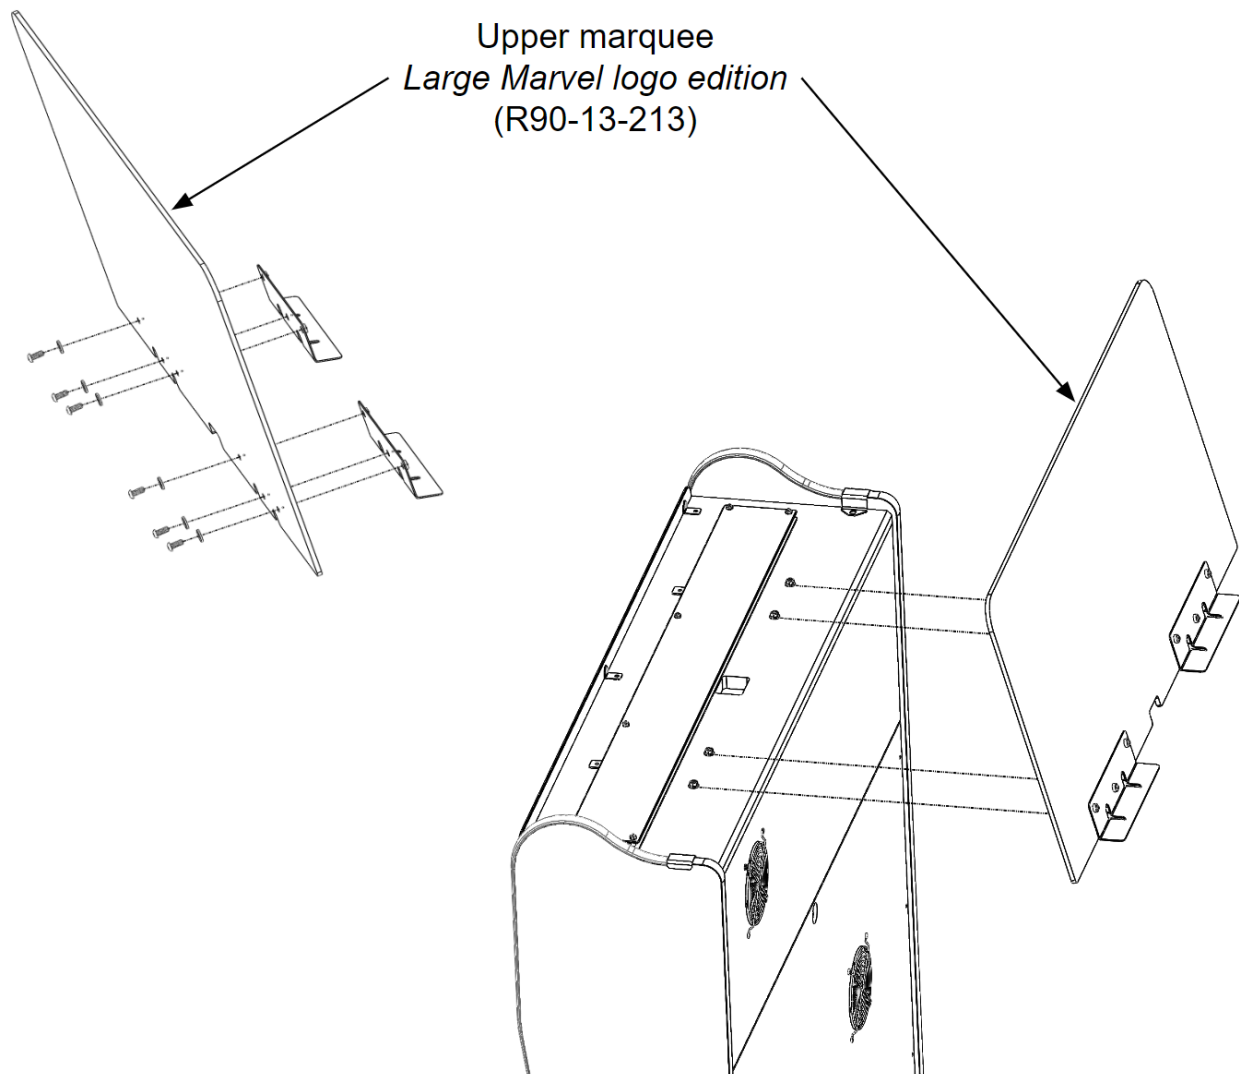

- 5.) Using a T-15 Torx Tamperproof bit, remove the (7) screws and washers that secure the lower marquee and clear plastic cover to the cabinet
- 6.) Replace the lower marquee translite with the new lower marquee translite included in the kit and install the new lower marquee translite and clear plastic cover to the cabinet using the (7) screws and washers that were just removed
- 7.) Using a T-15 Torx Tamperproof bit, remove the (7) screws and washers that secure the speaker panel translite and clear plastic cover to the cabinet
- 8.) Replace the speaker panel translite with the new speaker panel translite included in the kit and install the new speaker panel translite and clear plastic cover to the cabinet using the (7) screws and washers that were just removed

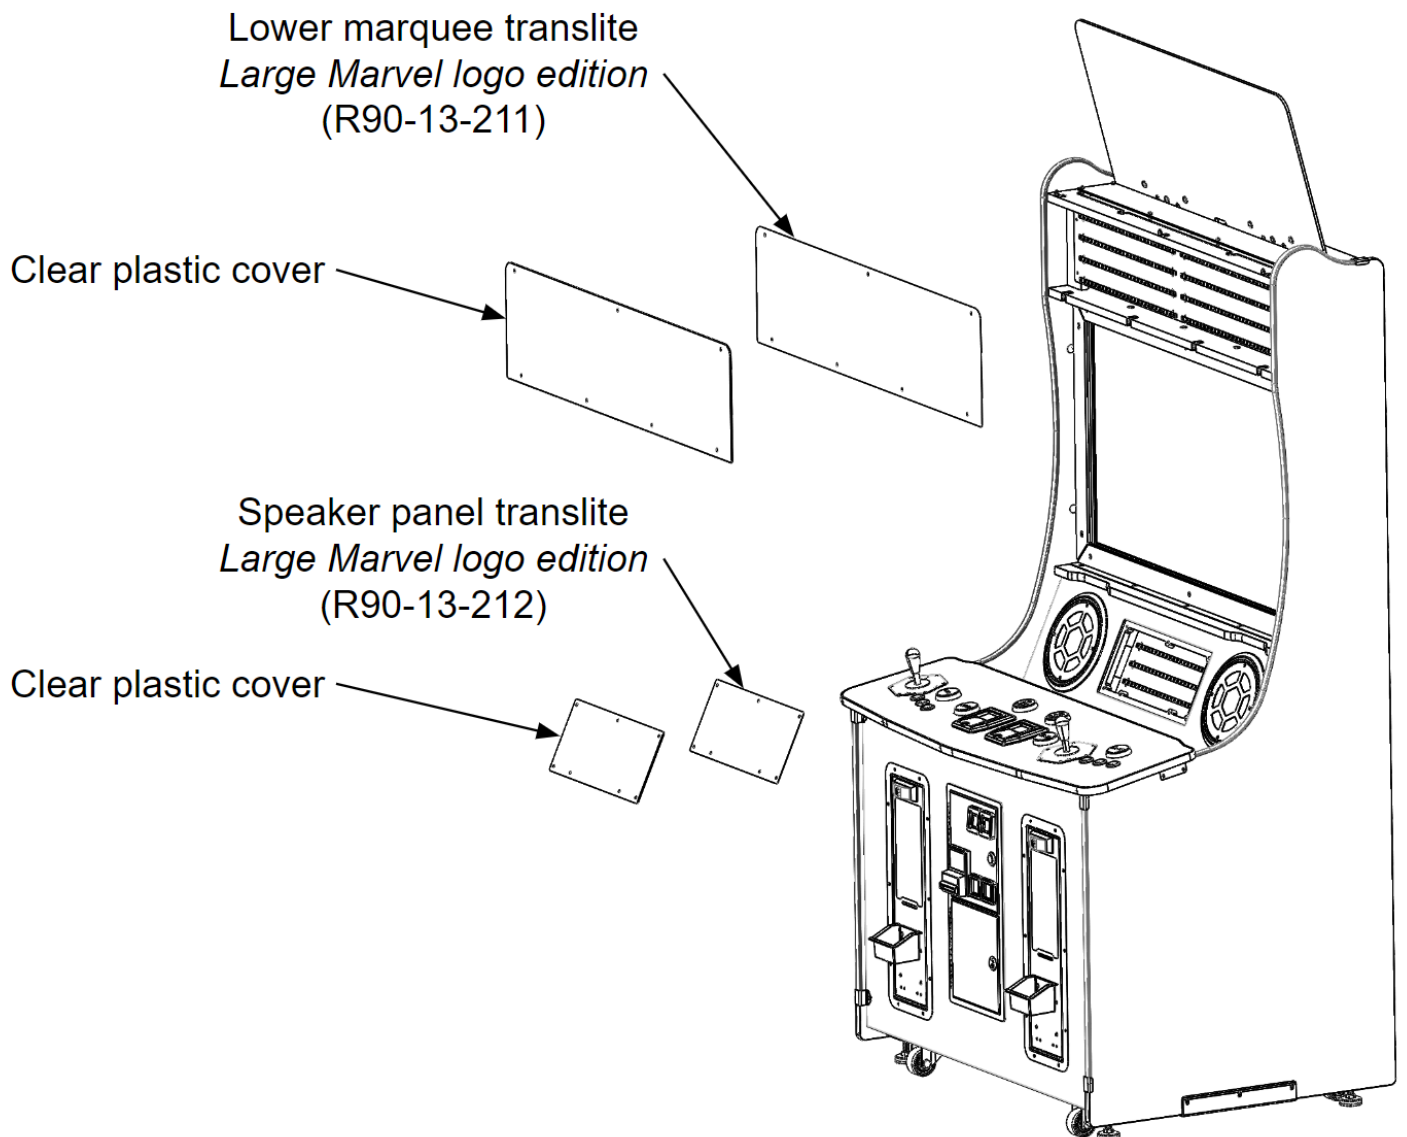

Software update procedure:

- 1.) Plug the USB drive into the test bracket's USB slot (located behind the upper coin door) or any open USB 3.0 slot on the PC
- 2.) Power cycle the machine
- 3.) When the game boots, select v1.781 from the menu (it should be the only software version listed) and follow the on-screen instructions to begin installation
- 4.) When the install is complete, remove the USB drive and power cycle the machine