


Wheel Well & Undermount Water Tanks

Fresh Water Fittings Kit

PARTS LIST

- (1x) 1 ¼" 90
- (2x) ¾" 90's
- (1x) ¾" Ball Valve
- (1x) ¾" Nipple (6" long)
- (1x) ¾" Nipple (4" long)
- (1x) ¾" Nipple (1½" long)
- (1x) ½" Poly Adaptor
- (2x) ½" Poly Elbows
- (2x) ½" Plugs *
- (1x) ¾" Plug **
- (2x) #20 Hose Clamps
- (2x) #8 Hose Clamps
- (1 roll) Teflon Tape
- (1x) Fill Port
- (5ft) Fill Hose
- (5ft) ½" ID Vinyl Hose

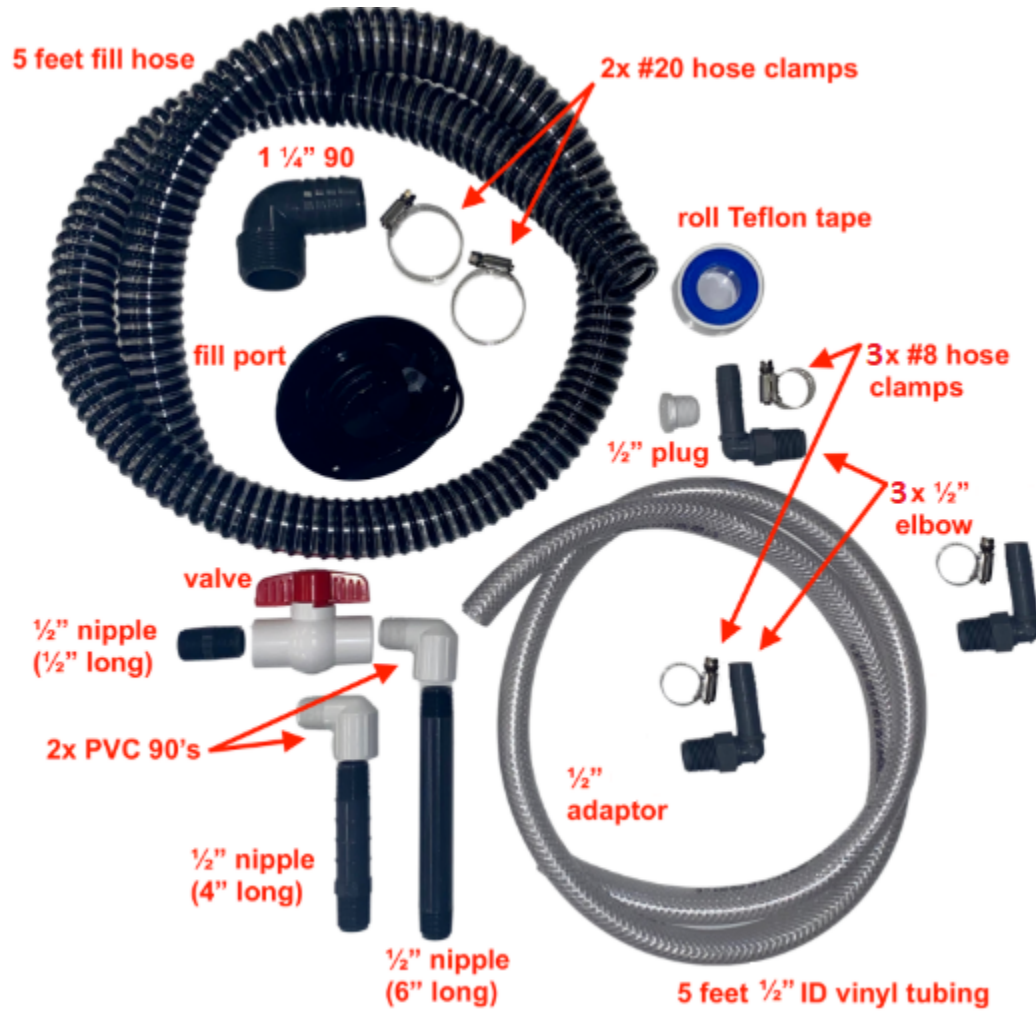

* ONLY 1x plug included with 22G, 27G.
NOT included with 10G, 15G, 16G, 17G.

** ONLY included with 29G, 32G.


Note: some ports on your tank have a membrane and require drilling for use.

Wheel Well & Undermount Water Tank Fresh Water Fittings Kit INSTALL INSTRUCTIONS

- Use one of the upper 1 ¼" ports for your fill port.
 - Use one of the upper ½" ports for your vent.
 - Use one of the bottom ¾" ports for your drain.
- Use one of the bottom ½" ports for your water pump hose.
- Use the ½" and ¾" plugs to seal any remaining ports - see parts list for your specific tank.
 - Use Teflon tape on all threaded fittings to ensure a proper seal.
- Option to use the 1 ½" port on the top of the tank for the KUS S5U Water Level Sender (sold separately).





FILL PORT

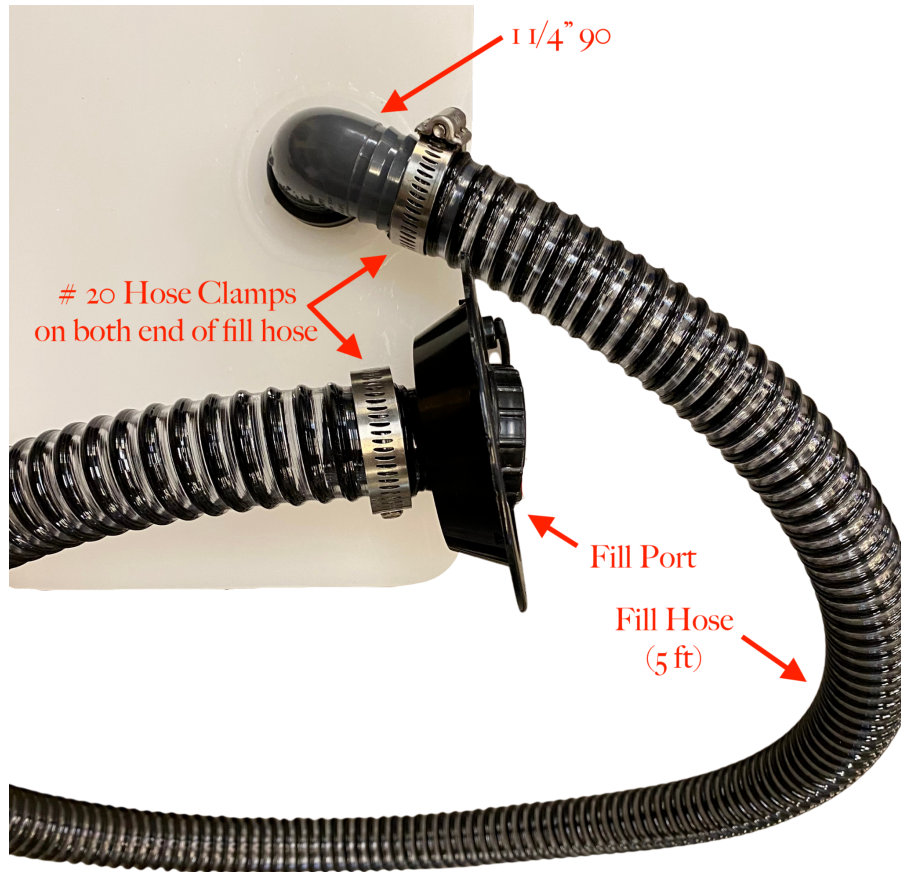

VENT



DRAIN TO GREY TANK OR GROUND (OPTIONS)

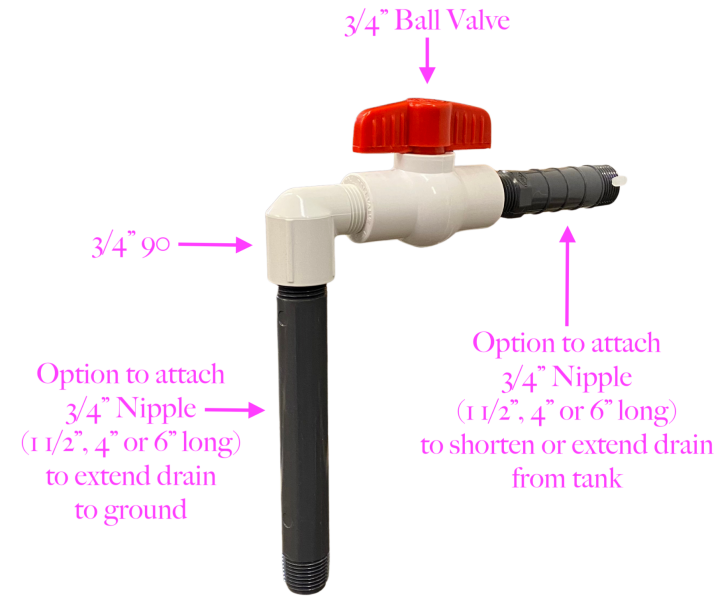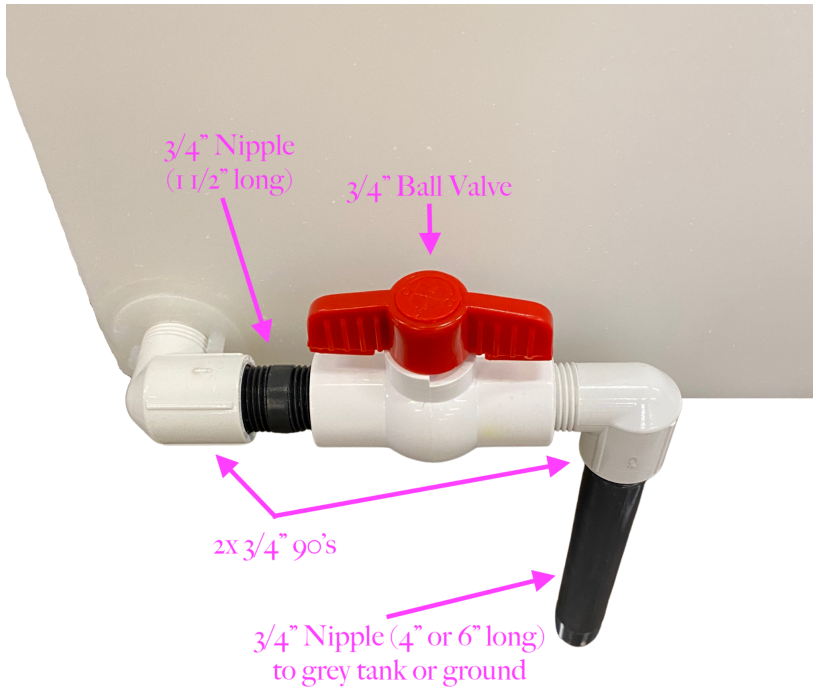

HOSE TO WATER PUMP (OPTIONS)

