

Barcode Scanner

PN0065



Table of Contents

Overview.....	3
Specifications.....	3
Setup.....	3
Operation.....	3
Software.....	3
Troubleshooting.....	4
Maintenance.....	4

Overview

PN0065 can speed up entering each new circuit board ID while performing Thermal Model Comparison tests. The scanner can read barcodes quickly and error-free at up to 29" away. High motion tolerance and a rastering scan pattern make the scanner easy to use. All common one-dimensional (1D) barcodes can be read, including damaged symbols or stacked RSS barcodes.

Applications

- Entering circuit board serial numbers

Specifications

Setup

Connect the scanner to an available USB port on your computer.

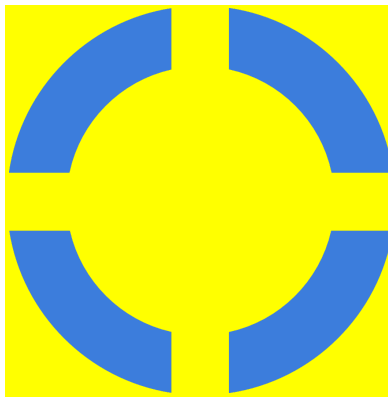


Figure 1: (description)

Operation

Software

Scanning an ID:

A circuit board ID can be scanned into the New Test Board ID field only when a [Thermal Model Comparison](#) project is open, and the New Test tab is selected on the Thermal Model Comparison Window (see Figure 1). Aim the scanner approximately 6 to 12” away from the barcode and then press the trigger. After the barcode has been automatically inserted into the ID field, the ID can be edited using the mouse and keyboard.

Cursor Position: The cursor does not need to be in the ID field when scanning barcodes.

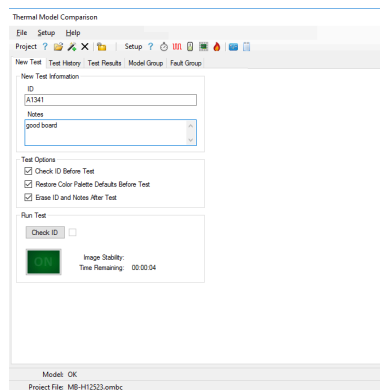


Figure 1: Thermal Model Comparison window

Troubleshooting

Maintenance