



INSTALLATION GUIDE

NPT Pressure

Do it yourself, or...

CONTACT US

Meadowlark Solutions


Call or Text +1(801)252-6135

Email us at info@tanktoad.com


Visit us at www.tanktoad.com

2816 CR 159, Albin, WY, 82050

WHAT IT LOOKS LIKE

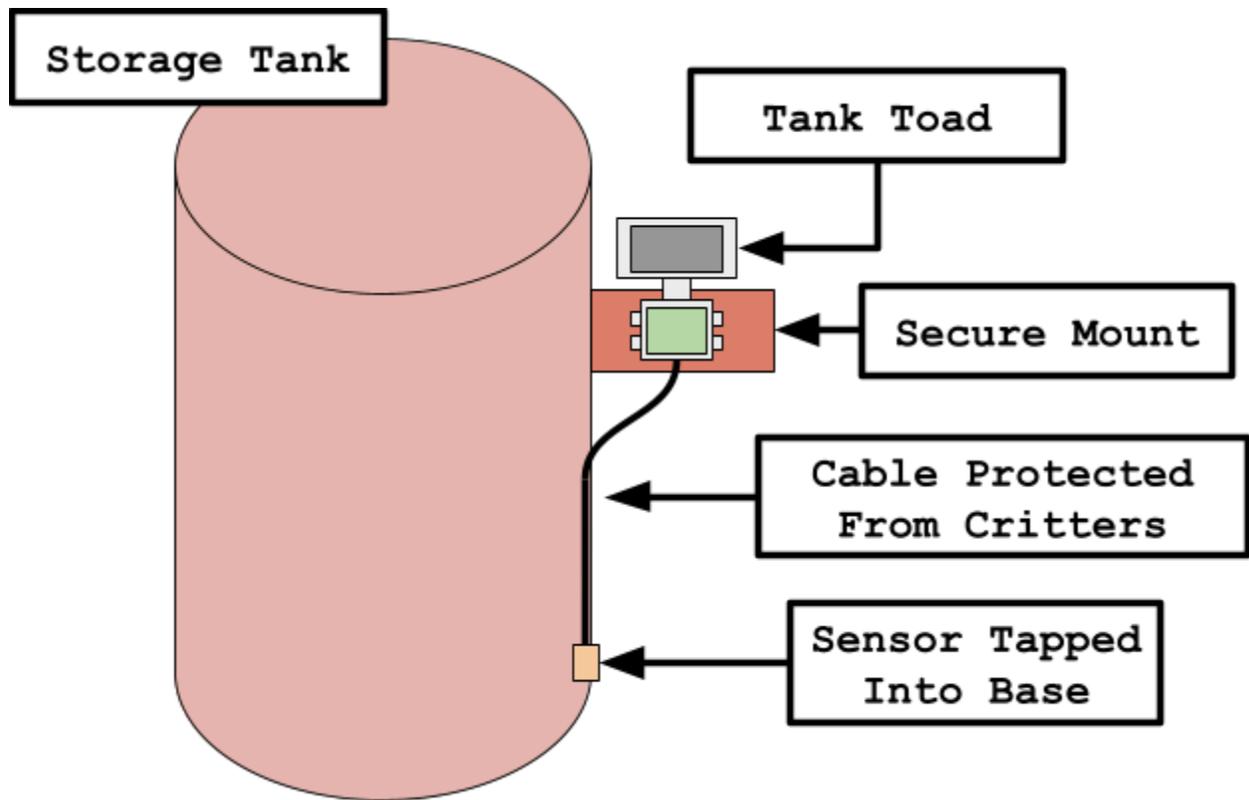

WHAT YOU GOT

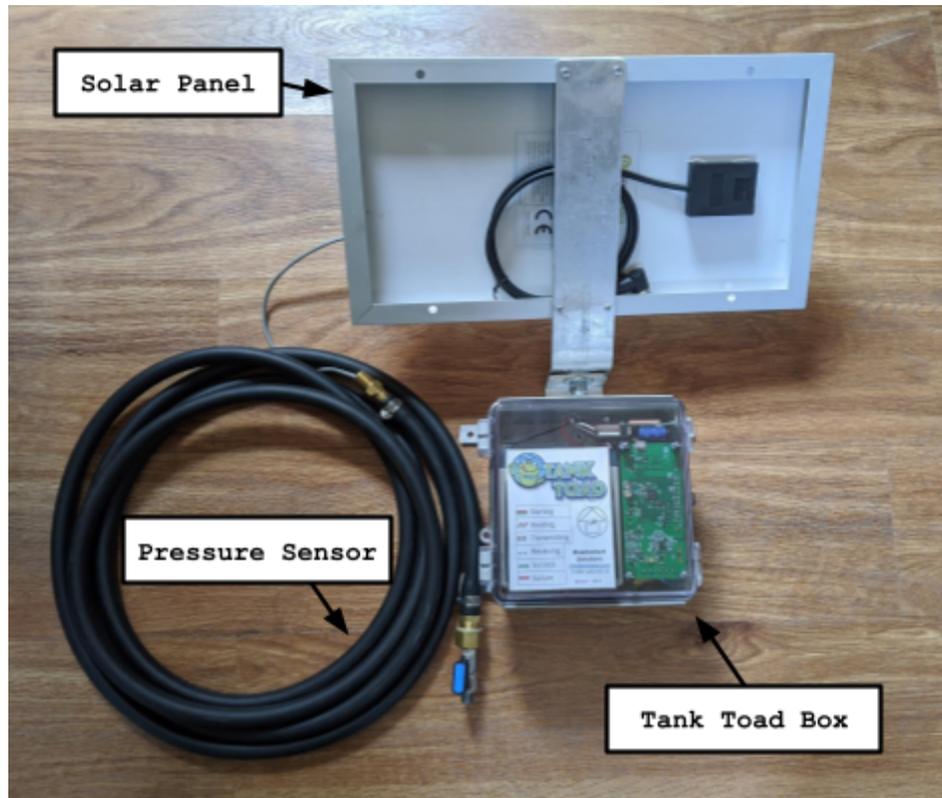


WHAT YOU NEED

- Screwdrivers
- Screws
- Wrenches
- 21/64" drill (to tap the hole)
- 1/8" NPT Tap
- 1/8" NPT elbow
- 1/8" NPT coupler
- Mounting material
 - Wood 2x4 or 2x6 (recommended)
 - T-posts (recommended)
 - Zip ties (recommended)



WHAT YOU HAVE TO DO


- Build a sturdy mount
- Protect the unit and cable from livestock
- Look at the pics below for inspiration

HOW TO DO IT

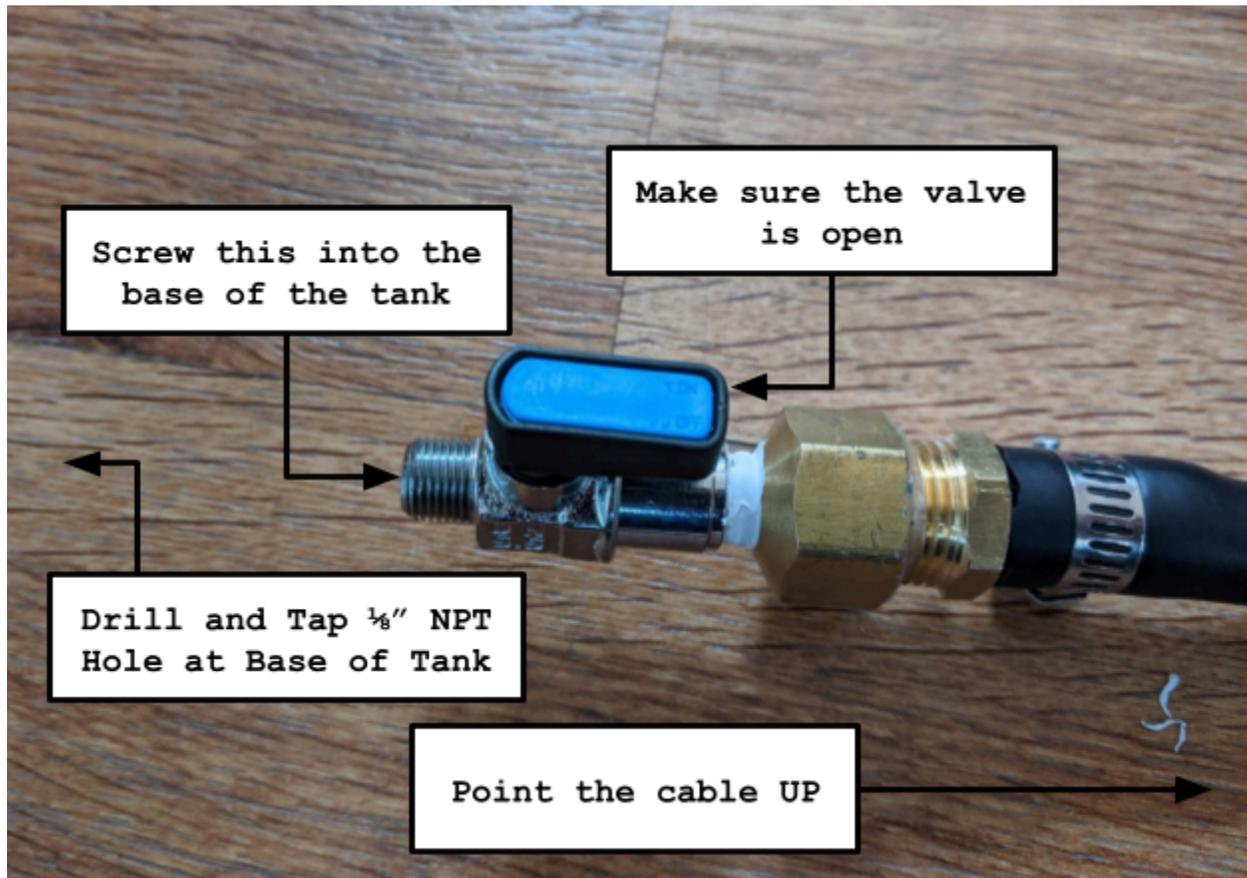


- Hint: Use a $\frac{1}{8}$ " NPT Elbow + Coupler to orient the cable UP

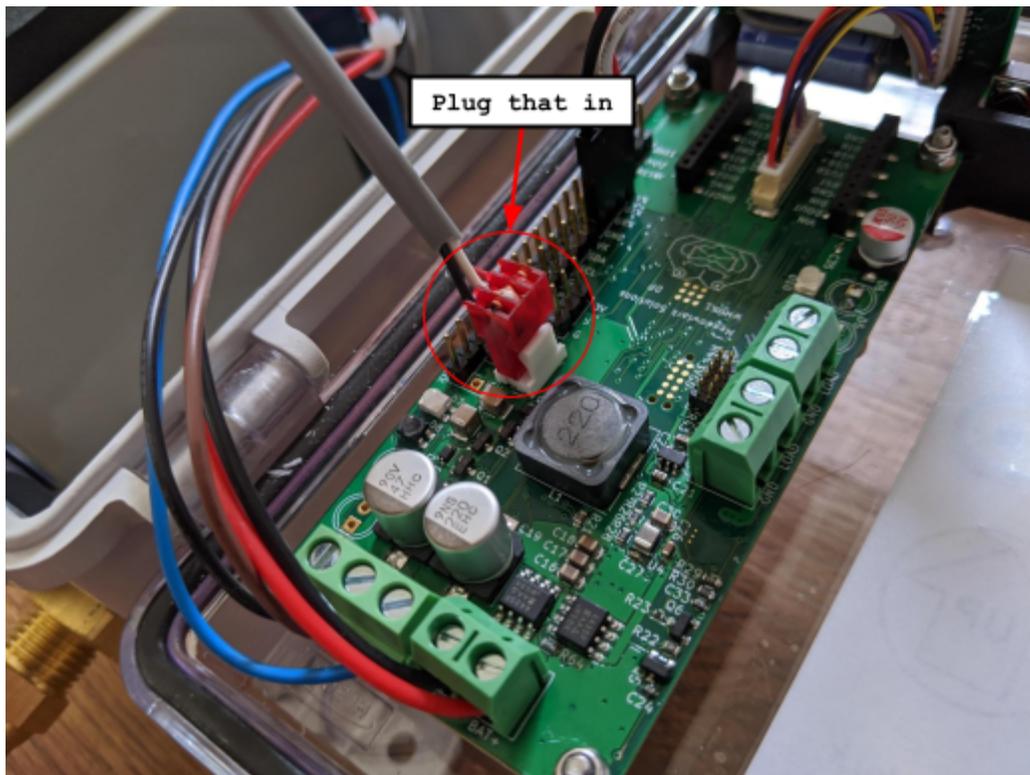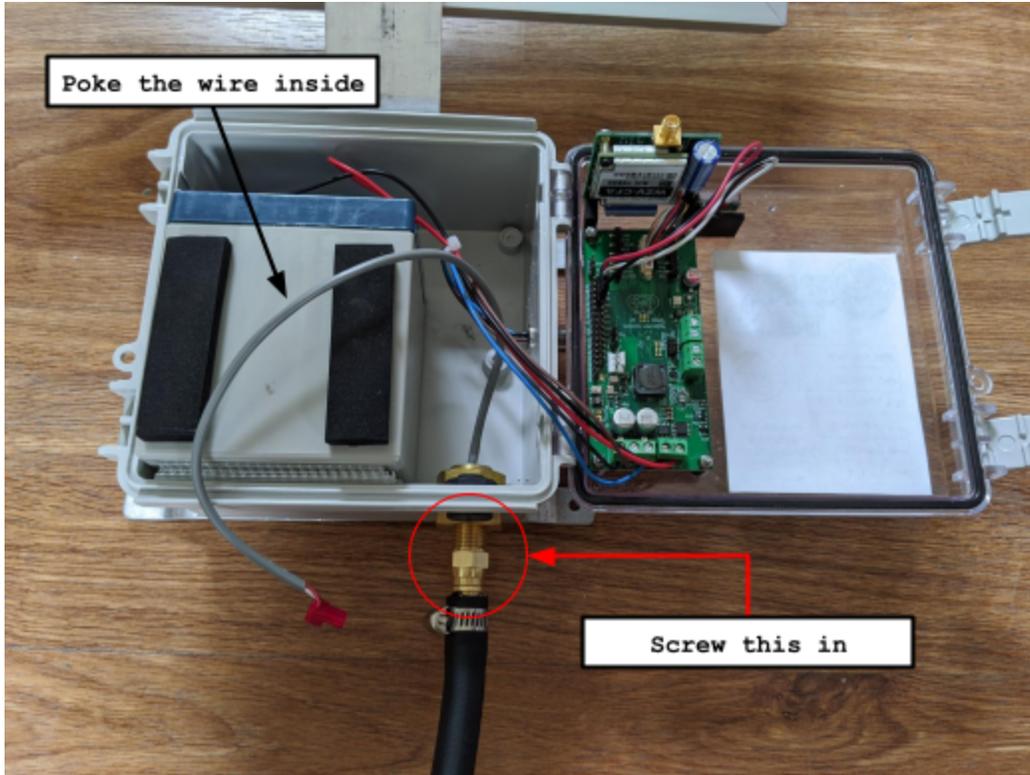

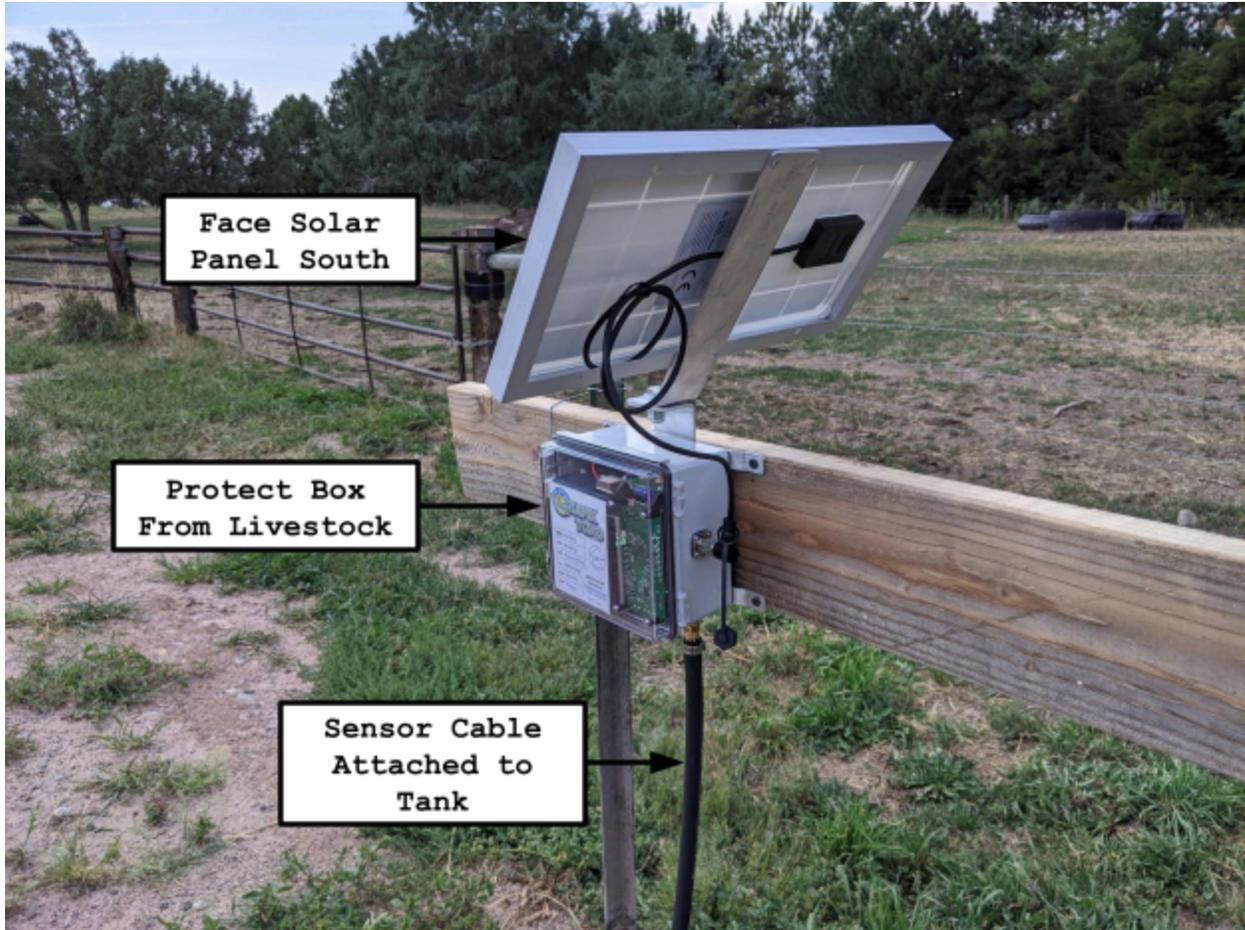

- Take a picture of your setup so we can help you!
- Make sure the arrow on the box points UP

TURN IT ON

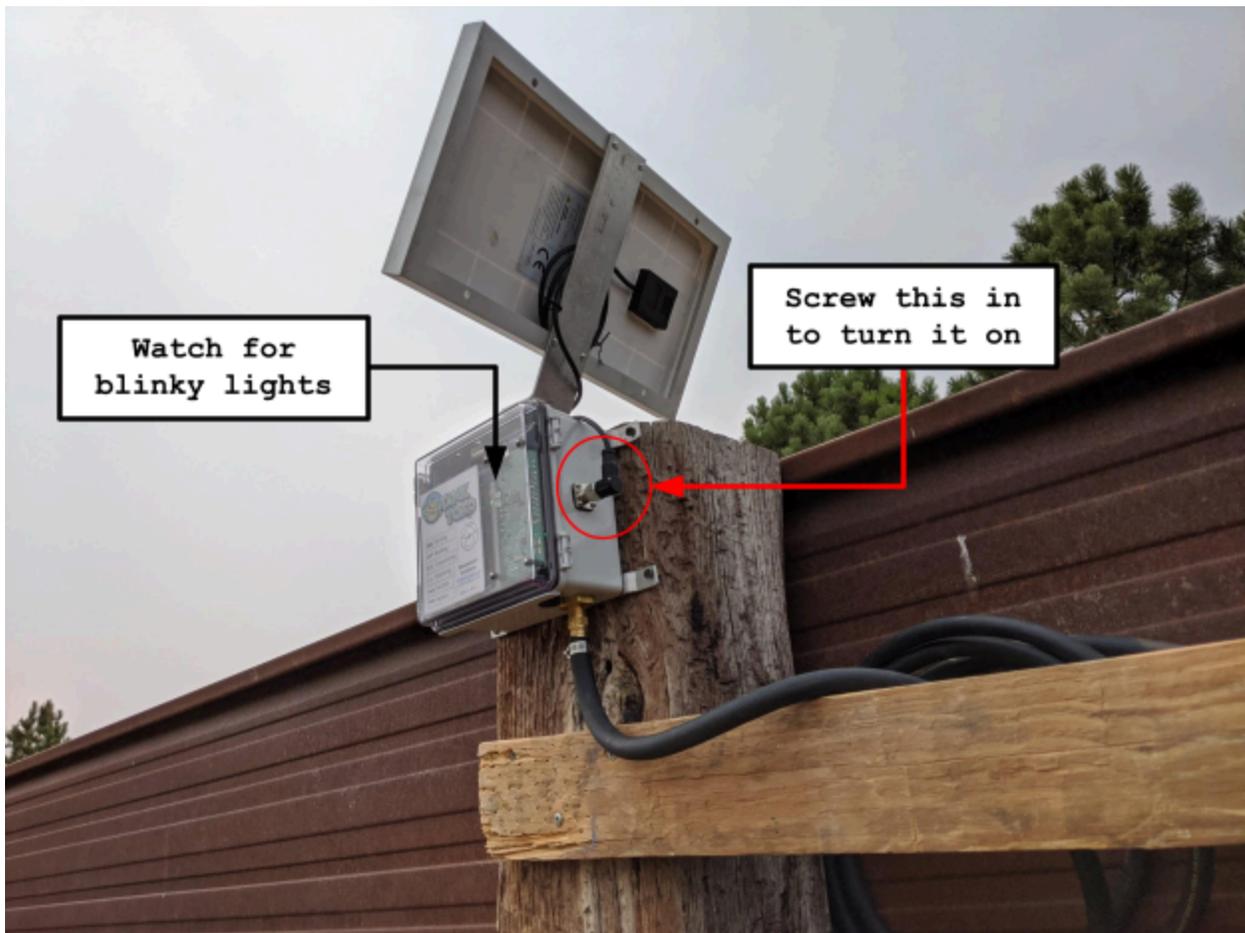

SETUP

- Turn on the device
- Wait for a text message with setup details
- If you receive a sensor error, please adjust the sensor position to a better location and try taking a reading

PLEASE...

- Take a picture of your entire setup so we can help you resolve issues
- Call or text if you are confused about something

PRESSURE SPECS

- 30 feet max water depth
- ± 3 inch accuracy
- Do not allow water to freeze inside the sensor