EasySET

Conceal Thermostatic Mixer with Trim
FFAS0930-000AL0BC0



FEATURES

- Casting brass concealed body
- With Anti-scald protect button to avoid scalding
- With water temperature restrictor, the Max. temperature for the water
- cartridge tested = 30,000 times
- With normal packaging
- Flow rate @ 0.3MPa: 47 L/min

SPECIFICATIONS

- Concealed control valve

  By default the factory setting is 38 ℃ for the water coming out.
- With water temperature restrictor,

  the Max. temperature for the water coming out is lower than 49 ℃


FINISHES AVAILABILITY

PVD Brushed Hard Graphite

AWARDS WON

N/A

DIMENSIONAL DRAWING

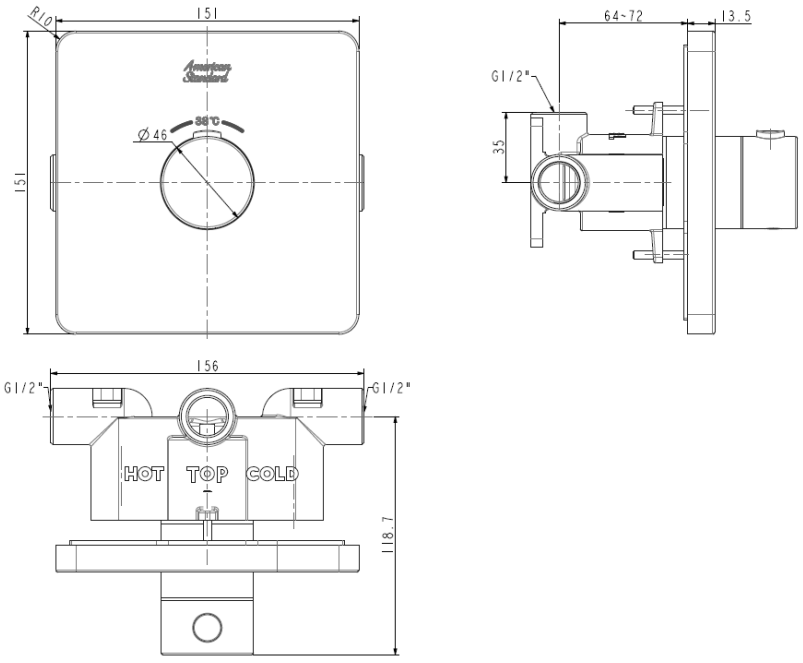

SHIPPING WEIGHT

- Product weight: 1.9 kg

STANDARDS CRITERIA

- Q B 2806-2006
  WI10.0575

This document is the property of American Standard. It can neither be reproduced, nor communicated, without authorization.
American Standard reserves the right to change dimensions and specifications without notice, we assume no liability for the use of obsolete dimensions.