


Interactive Smart Flat Panel - Model D1 65"

November 24th, 2023

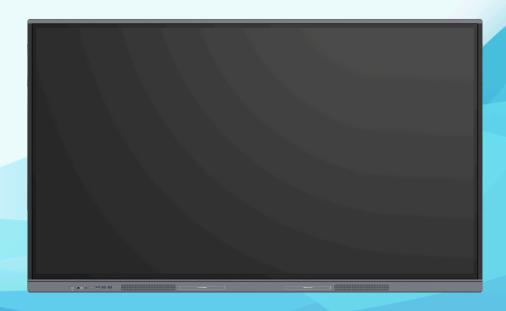

• 4K UHD

Anti-Glare Screen

Android

Guangdong HUSHIDA Electronic Technology Co.,Ltd.

Product Features

- 4K ultra-high-definition display supports full-channel 4K UI display; it uses AG anti-glare glass with high haze OC to resist ambient light interference, and the display screen is soft and clear
- All-metal ultra-narrow frame design, simple appearance, dual magnetic pens on the front, easy to take in and out before and after use; zero lamination process, low parallax writing, wider viewing angle
- Computer modular design, OPS/pull-out PC setting, easy maintenance
- Android/Windows dual system support, one-click switching, compatible with more software, to meet more needs
- Electronic whiteboard: Smooth writing, supports 20-point touch, annotation, drawing, erasing, image zooming and rotation, and supports one-click saving of whiteboard content by scanning QR code with mobile phone
- Wireless screen projection: supports wireless screen projection, multi-screen function on the same screen (supports Android, Windows, IOS, Mac/OS), supports 4 devices on the same screen at the same time
- Remote video: supports remote video conferencing, multi-party remote meetings, remote PPT lectures, remote desktop sharing, supports smooth, SD, and HD modes
- Meeting reservation software: The meeting cloud is initiated in advance, and participants are reminded of time and location information. They can enter the meeting by swiping their faces on-site to achieve efficient meetings.
- Conference training: Built-in office, picture viewing, video player and other
 office practical tools, built-in wireless WIFI, network card, support for
 wireless Internet access, support for synchronous transmission of pictures
 from mobile phones, tablets, Pads and other devices to the tablet, support
 for remote multi-party remote meetings, remote PPT speech, remote
 desktop sharing
- Commercial display: Customize the startup screen, theme and background, the local media player supports automatic classification to meet the needs of different occasions; built-in professional multimedia playback software, the playback software supports split-screen playback (one split screen, two split screens, three split screens); Optional interactive touch inquiry system, government affairs inquiry, company introduction, cultural promotion, business introduction, turning the conference machine into a self-service inquiry machine

3 HUSHIDA Specifications

Display

65 inch	
ADS	
16:9	
8ms	
1428.48(H)×803.52(V)mm	
3840(H)×2160(V)	
0.372mm×0.372mm	
60Hz	
1.07b(10 bit)	
72%	
1200:1	
178°(H/V)	
D-LED CHILD	
350cd/m²	
≥50000 hours	
	ADS 16:9 8ms 1428.48(H)*803.52(V)mm 3840(H)*2160(V) 0.372mm*0.372mm 60Hz 1.07b(10 bit) 72% 1200:1 178°(H/V) D-LED 350cd/m²

Operation System

Operation System			
System Version	Android 11.0		
Ram	3G		
Rom	32G		
CPU	T982 4*A55		
GPU	Mali-G52MP2		
Interface	HDMI IN*2, USB 2.0, USB 3.0, TOUCH 2.0, MIC IN, VGA IN, AUDIO IN, AUDIO OUT, SPDIF, RS232, RJ45 IN, USB Type-C IN(USB2.0), TOUCH 2.0		

Touch HUSHIDA

Touch	
Туре	Infrared
Input	Fingers / Passive infrared pen / active infrared pen
Touch Precise	±1.5mm
Touch Points	20 points
Minimun Touch Points	3mm
writing height	≤3mm
Writing Display	Double pen and double color
Response time	≤10ms
ZHUS.	HUSHIDA

Speaker

AIDA CA	Speaker				
HUSHID.	Power	1/12	2x16w(2.0)	2 HOS	ZHUSHI
PHARM					

Electrical

Electrical		
SHIDA	7HUS.	HUSHIDA
Power Input	100-240V~50/60Hz	3
Max power consumption	325W	PHASI
3" JISHIDA	7 HARMIN	SHUSHIDA
Dhysical Darama	tora ISHID	

3 HUSHIDA

Physical Parameters

Machine Size (I × w × t)	1484.2(H)×887.2(W)×86.2(D)mm
Packaging size (I * w * h)	1600(H)×1035(W)×200(D)mm
VESA hole (I * w)	600×400mm
Wall mounting screw	M8×25mm
Net Weight	/ JAUS
Gross Weight	Z HUS
Accessories	ZHUSHIDA ZHDA


Accessories

3 HUSHIS				
Power Cable	X1	Zw.	, HUS'AI	
Stylus	X2	HUSHID		
Wall Mount Bracket	X1	HIDA	7	
AIDA [®]	ZHUSHIDA . DA	7 HARH	D [®]	

Enviroment

Enviroment	
Working Temperature	0°C~50°C
Working Humidity	10%~90%RH
Stocking Temperature	-20°C~60°C
Stocking Humidity	10%~90%RH
Working Altitude	Below 5000meters
Size Chart	

Size Chart

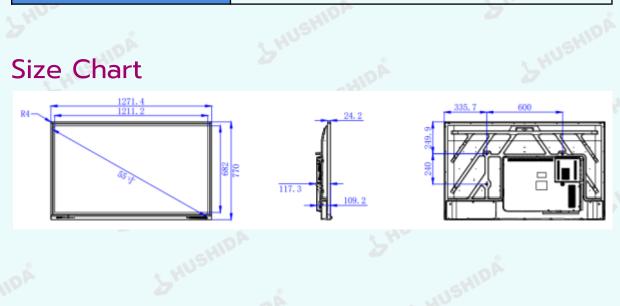

Contact HUSHIDA Team

Email: support@hushidaglobal.com

WhatsApp: +1 909 905 7781

Phone: +86 18576560374

Website: https://hushidaglobal.com

Retail Website: https://www.hushidasmart.com

"互动视界,智达未来" "Interactive Vision, Intelligent Future"

