

Exposed EasySET


American Standard

Auto Temperature Shower System (3-Way)

FFAS4956-601AL0BC0



DIMENSIONAL DRAWING

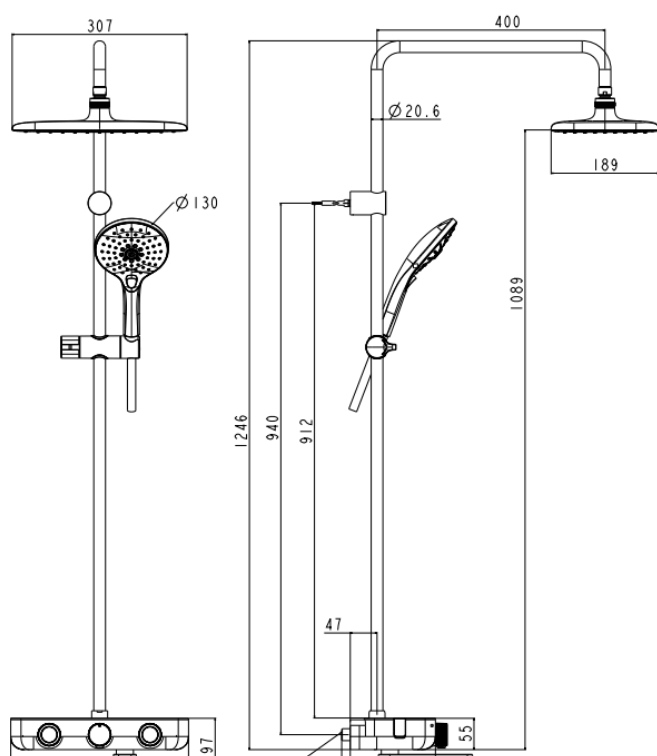

FEATURES

- German thermostatic cartridge
- Anti-scald safestop button
- *Push button cartridge with flow rate adjustable from Japan, life cycle ≥ 300,000 times*
- Plastic body with cool touch design, no risk of scalding on the body
- Designed with a shelf space for storage function
- Side Hook on both side, as a shower accessories and drain the water on the top of Casting brass spout, rotate to divert the water to hand shower and spout
- 3-functions Rain Click hand shower, instinctive button for switching between spray modes
- PVC twist-free shower hose
- With easy glide shower holder
- With normal packaging
- 307*189 rectangle head shower, with air-in function
- Flow rate @ 0.1MPa: 4.3L/M for hand shower
- Flow rate @ 0.1MPa: 6 L/M for shower head
- Flow rate @ 0.1MPa: 12 L/M for Spout

SPECIFICATIONS

- Exposed THM mixer faucet
- Two-Hole Installation

FINISHES AVAILABILITY

PVD Brushed Hard Graphite

AWARDS WON

- N/A

SHIPPING WEIGHT

- Product gross weight: 9.5 kg /set
- Product net weight: 7.5 kg /set

STANDARDS CRITERIA

- GB/T 2806-2017
- WI10.0575

roduced, nor communicated, without authorization.

ions without notice, we assume no liability for the use of obsolete dimensions.

Rev.: D0