




LSHW-100

LED module

4.81-13S (250X250)

February 29th, 2024

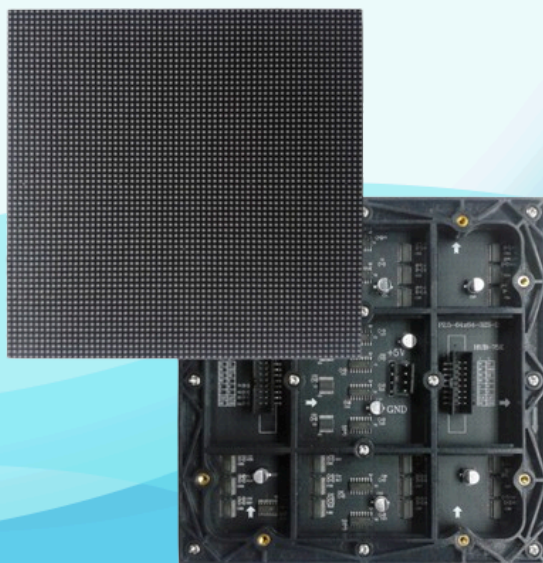

- ◉ Seamless splicing
- ◉ High quality modules
- ◉ Full color screen

Guangdong HUSHIDA Electronic Technology Co.,Ltd.

Specifications

Display

Product Version	4.81-13S (250X250)
Physical point spacing	4.81mm
Cell board size	250X250
Unit box size	500mm*500mm*80mm
Physical density	43264/m ²
Glow point color	1R1G1B
Cell board resolution	52*52=2704 DOTS
Cabinet resolution	104*104
Best viewing distance	6m~50m
Viewing angle level	≥140°
White balance brightness	≥5000cd/m ²
Vertical viewing angle	120°
Average power consumption	≤400W/m ²
Control method	Synchronous control
Refresh frequency	1920Hz
Frame change frequency	50/60
Brightness sensor automatic adjustment	16 levels adjustable
Software manual adjustment	100X100
Operating system	Windows

Video signal	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION, etc.
Control System	PC TV card (optional) + DVI graphics card + main control card + optical fiber transmission (optional)
Frequently used	100000+

Contact HUSHIDA Team

Email: support@hushidaglobal.com

WhatsApp: +1 909 905 7781

Phone: +86 18576560374

Website: <https://hushidaglobal.com>

Retail Website: <https://www.hushidasmart.com>

“互动视界，智达未来”

“Interactive Vision, Intelligent
Future”

