


Undermount Water Tanks Grey Water Fittings Kit PARTS LIST

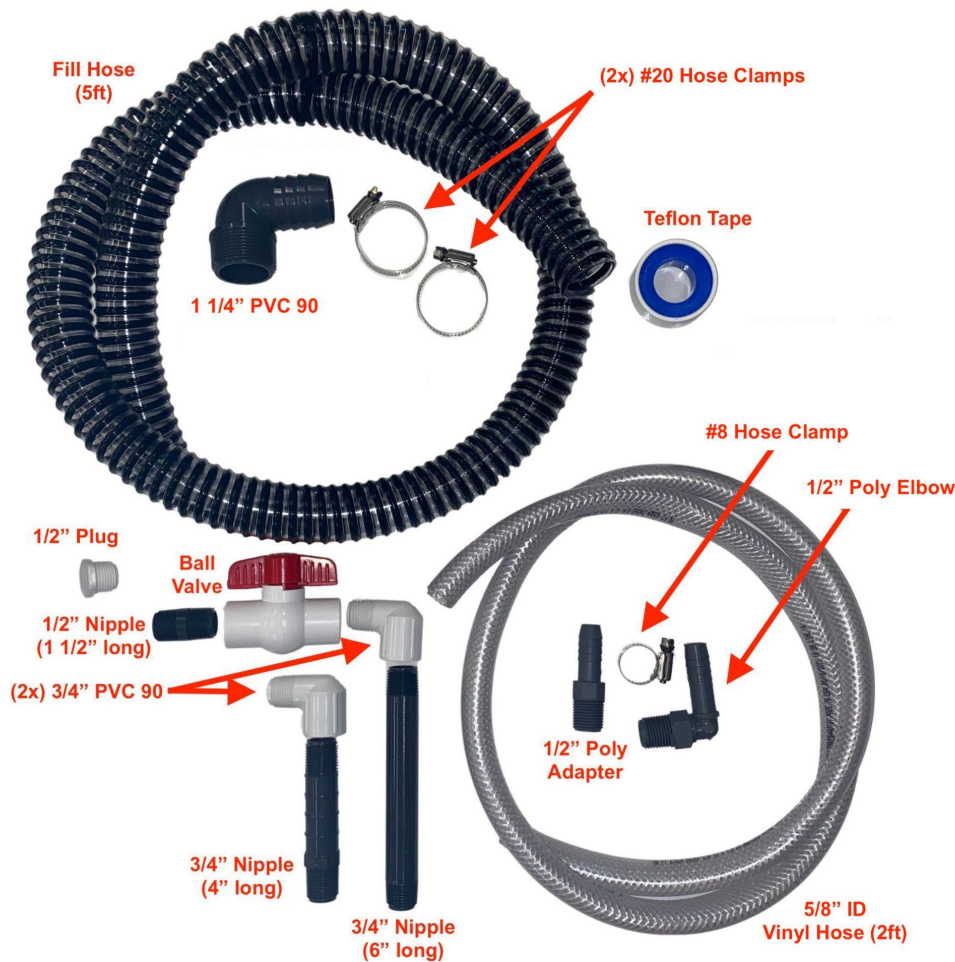


- (1x) 1 1/4" 90
- (2x) 3/4" 90's
- (1x) 3/4" Ball Valve
- (1x) 3/4" Nipple (6" long)
- (1x) 3/4" Nipple (4" long)
- (1x) 3/4" Nipple (1 1/2" long)
- (1x) 1/2" Poly Adapter*
- (1x) 1/2" Poly Elbows
- (1x) 1/2" Plug
- (2x) #20 Hose Clamps
- (1x) #8 Hose Clamp*
- (1 roll) Teflon Tape
- (5ft) Fill Hose
- (2ft) 5/8" ID Vinyl Hose


*** 15G Promaster undermount tank comes with 3x 1/2" Poly Adapters and 3x #8 Hose Clamps for the 3x vents - one at the top of each hump.**

Undermount Water Tank Grey Water Fittings Kit INSTALL INSTRUCTIONS

- Use one of the upper 1 ¼" ports for your fill port.
 - Use the upper ½" port for your vent.
 - Use the bottom ¾" port for your drain.
 - Use the ½" plug to seal the bottom ½" port.
- Use Teflon tape on all threaded fittings to ensure a proper seal.
- Option to use the 1 ½" port on the top of the tank for the KUS S5U Water Level Sender (sold separately).
 - *KUS S5U Water Level Sender NOT compatible with 15G Promaster Undermount Water Tank.

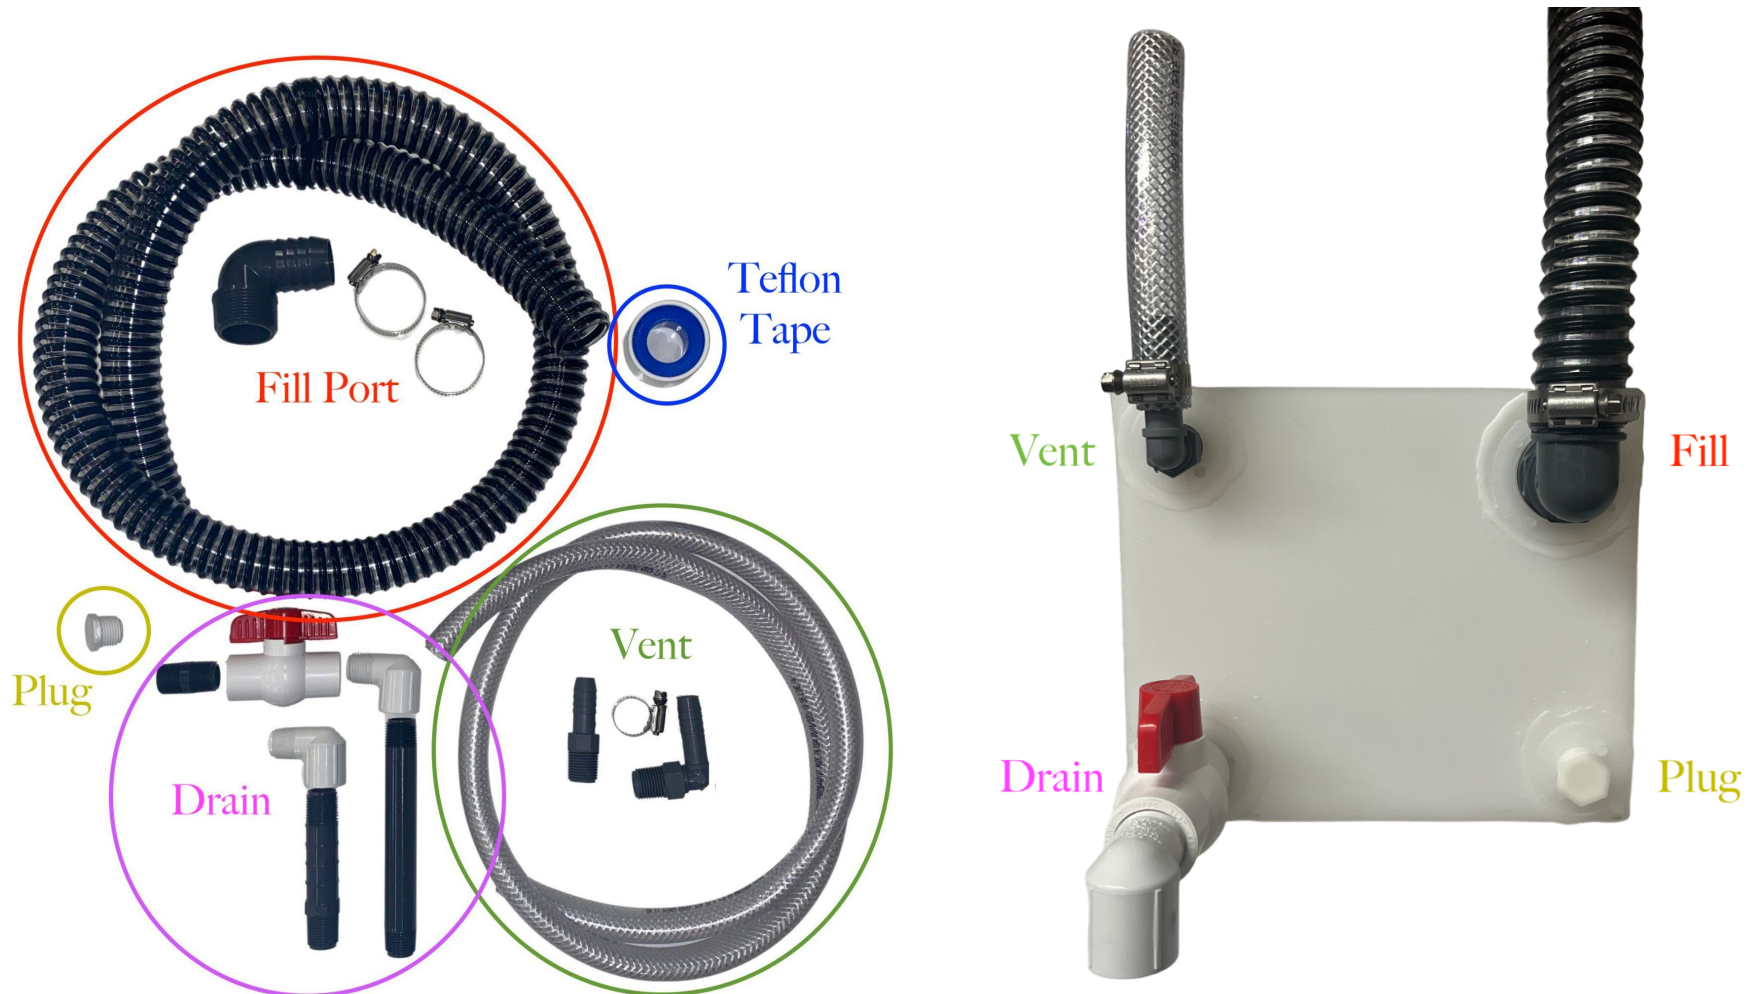

FILL PORT

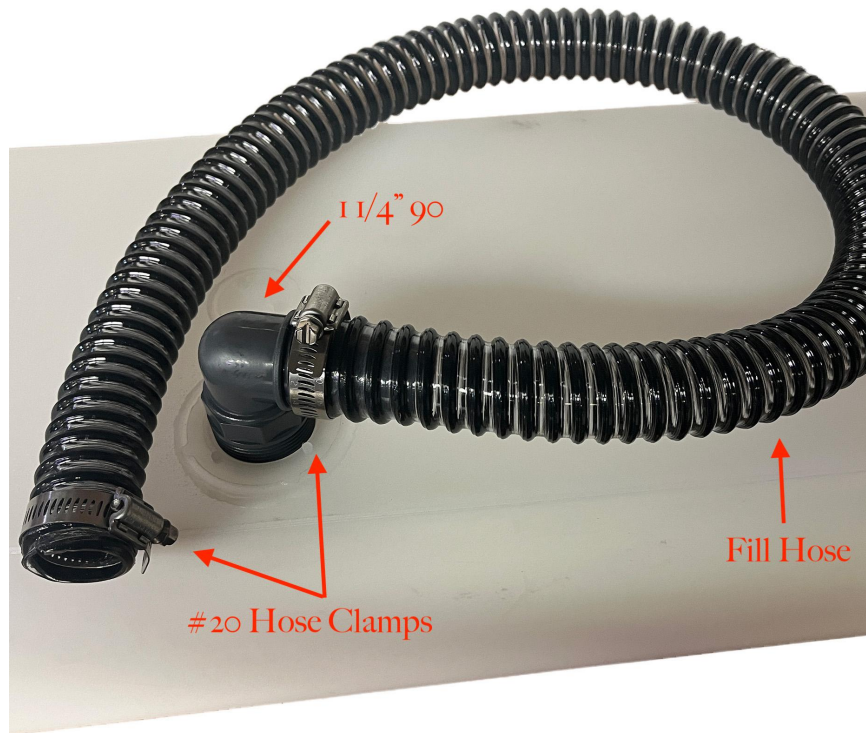

VENT



DRAIN TO GROUND (OPTIONS)

