


August Cross

© Wanda Salmans 2021

R = ring Ch = chain -= picot
--= progressively larger/smaller picot
+= join SS = switch shuttles
Sht1 = shuttle 1 Sht2 = shuttle 2
prev = previous RW = reverse work
DNRW = do not reverse work
SR = Split Ring



Center R 6—-6 RW Ch 4-4 RW *R 6+6 to large p RW Ch 4-4*

Repeat between * 6 times, + to base of 1st R. Cut and tie.

(Alternately, at ‡ use a split chain to climb out of Center, then a SR of 3/3 instead of a regular R at Start.)


2nd Arm End Start 1st Arm Direction of tatting

1st Arm Start R 3+3 to p of Center. DNRW #SR 5-5/4-4 R 5+(to prev R)3-1-1-3-5 SR 5+5(to prev R)/4-4 SR 3/3# Repeat between # 2 times. Sht1 R 10

SR 3/3
^SR 5-5/4+(to facing R)4
R 5+ (to prev R)3-1-1-3-5
SR 5+(to prev R)5/4+(to facing R)4
SR 3/3^

Repeat between ^ 2 times. Join to p of Center Ch with Sht2 thread, then 2nd half of double stitch

Arm detail



wandasknottythoughts wandasknottythoughts@gmail.com See tips on page 3

August Cross

© Wanda Salmans 2021

Corner

Join to p of Center Ch with Sht2 thread


SR 3/3

SR 3-1-1-3 /4

SR 3/3 close

Join to p of Center Ch with Sht2 thread,

then 2nd half of double stitch



 2^{nd} Arm

SR 3/3

SR 5-5/4-4

R 5+(to prev R)3-1-1-3-5

SR 5+5(to prev R)/4-4

SR 3/3

R 3-1-1-3

SR 3/3

SR 5-5/4+(to facing R)4

R 5+ (to prev R)3-1-1-3-5

SR 5+(to prev R)5/4+(to facing R)4

SR 3/3

Join to p of Center Ch

Top

SR 3/3

SR 5-5/4-4

R 5+(to prev R)3-1-1-3-5

SR 5+5(to prev R)/4-4

SR 3/3

R 10

SR 3/3


SR 5-5/4+(to facing R)4


R 5+ (to prev R)3-1-1-3-5

SR 5+(to prev R)5/4+(to facing R)4

SR 3/3

Join to p of Center Ch

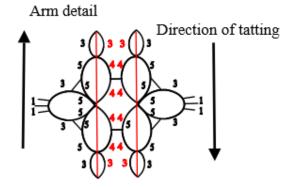

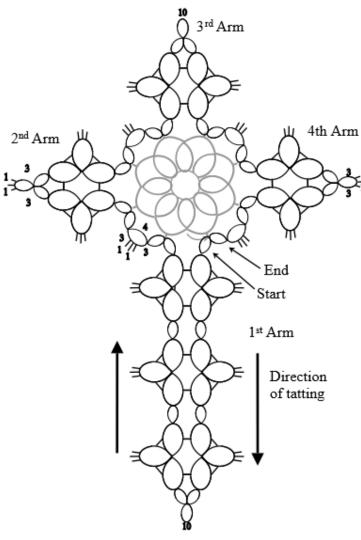

August Cross

4th Arm

SR 3/3

SR 5-5/4-4

R 5+(to prev R)3-1-1-3-5

SR 5+5(to prev R)/4-4

SR 3/3

R 3-1-1-3

SR 3/3

SR 5-5/4+(to facing R)4


R 5+ (to prev R)3-1-1-3-5

SR 5+(to prev R)5/4+(to facing R)4

End R 3+3 Join to p of Center Ch.

Add tassels to top and bottom rings if desired.


Arm detail

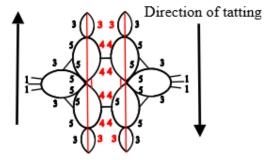

Tips



Leave a space between the first and third rings. This keeps the arm straight.

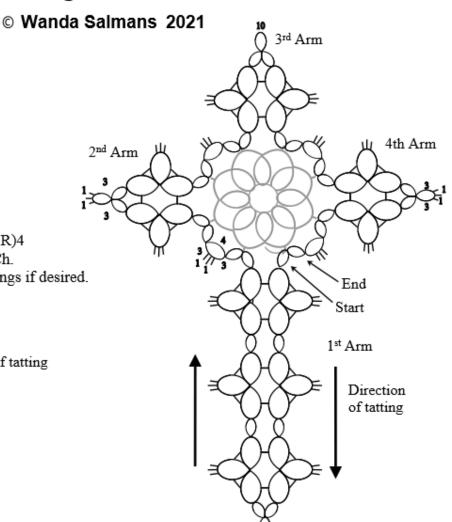



When joining to the second half of a split ring, join with Sht2 thread.