



Provisioning Guide for OSM Menuboard Manager

1. Select appropriate settings, language, Region, Country and City. Select Next.

LANGUAGE & LOCATION SETTINGS

Confirm your location and language settings.

Language

English

OK : Edit

Region

< North Ame... >

Country/Territory


United States of America

City

Custom

NEXT

01

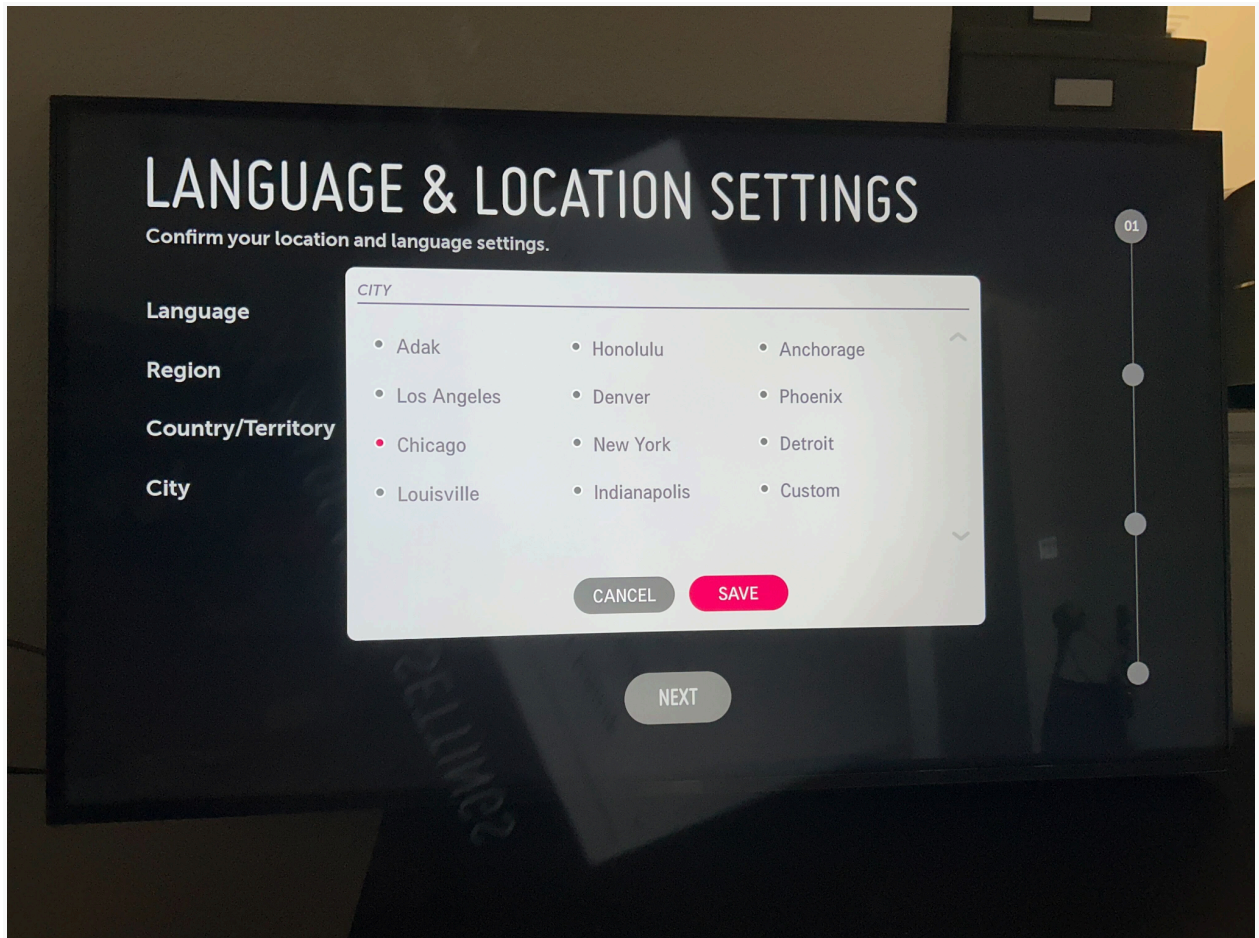

2. Select Network Type. Ethernet set to "Set Automatically". Click right to change from Wired to Wireless. If wireless, select the appropriate network.

NETWORK SETTINGS

Network Settings

Network

Wired (Eth... >

Set Automatically


On ☒

Your signage is connected to the wired network. Want Wi-Fi? Unplug your Ethernet cable now.


02

BACK

NEXT

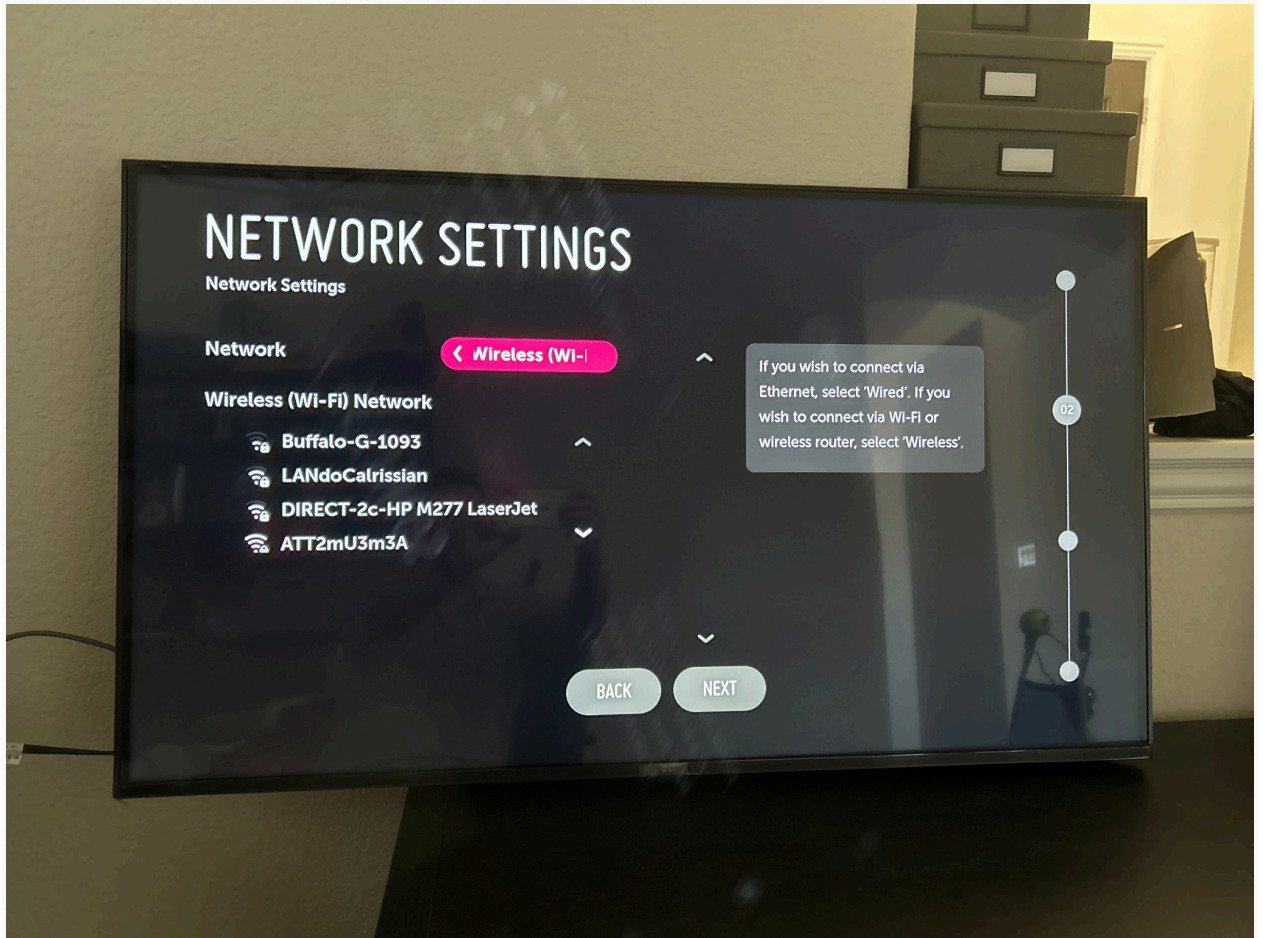

3. On Ready to Use screen select Quick start/Normal configuration and select Next

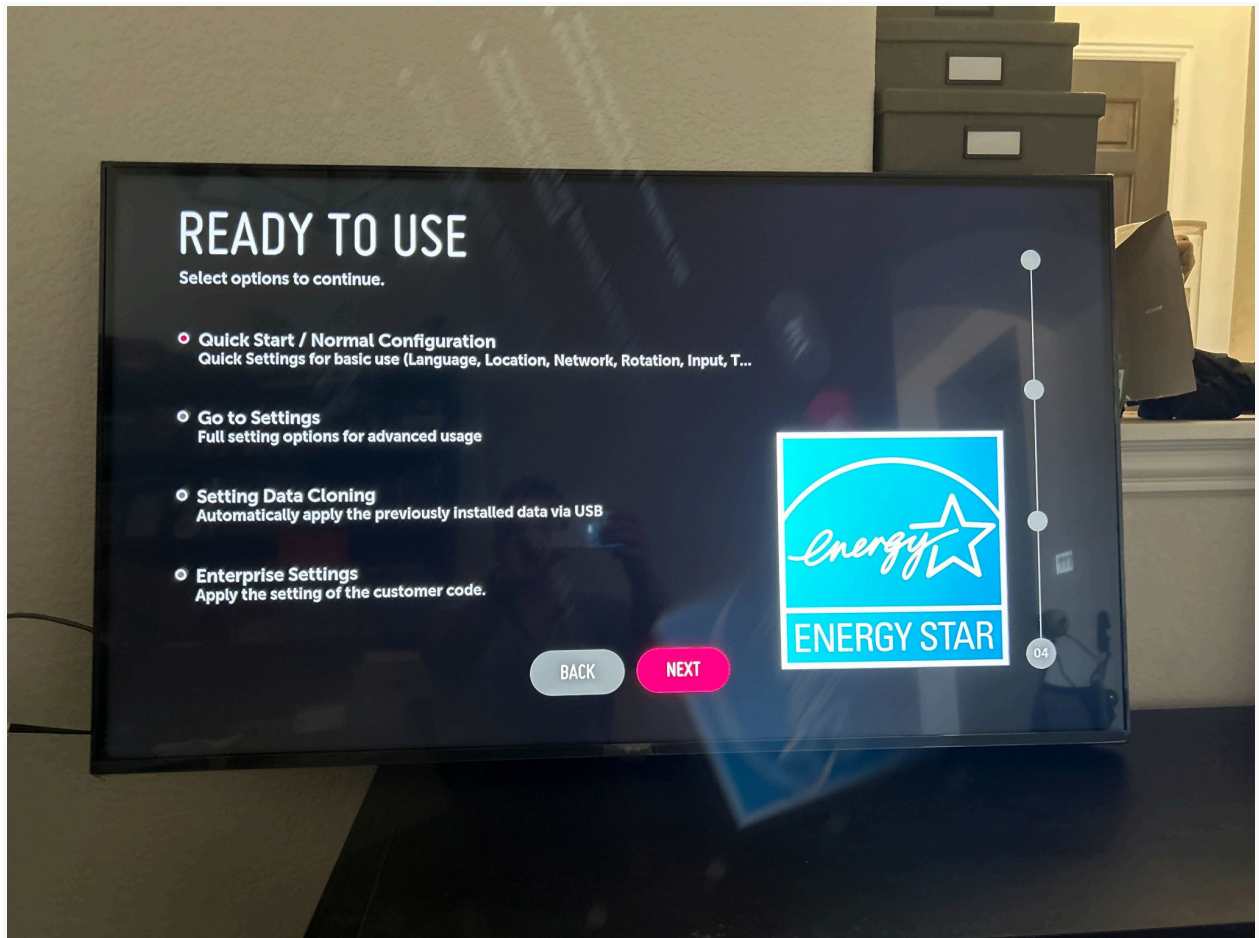

4. Leave screen rotation and other settings as they are by default. Set date and time, **this is critical**. Set "No Signal Power Off to OFF. Select Done.

QUICK START / NORMAL CONFIGURATION

Confirm your rotation, input, time and auto power settings.

Rotation

Screen Rotation

Off



External Input Rotat...

Off



Input

HDMI 1



Time & Date

2:08 PM Monday, October 21, 2024

No Signal Power Off (15Min)


On




BACK

GO TO SETTINGS

DONE

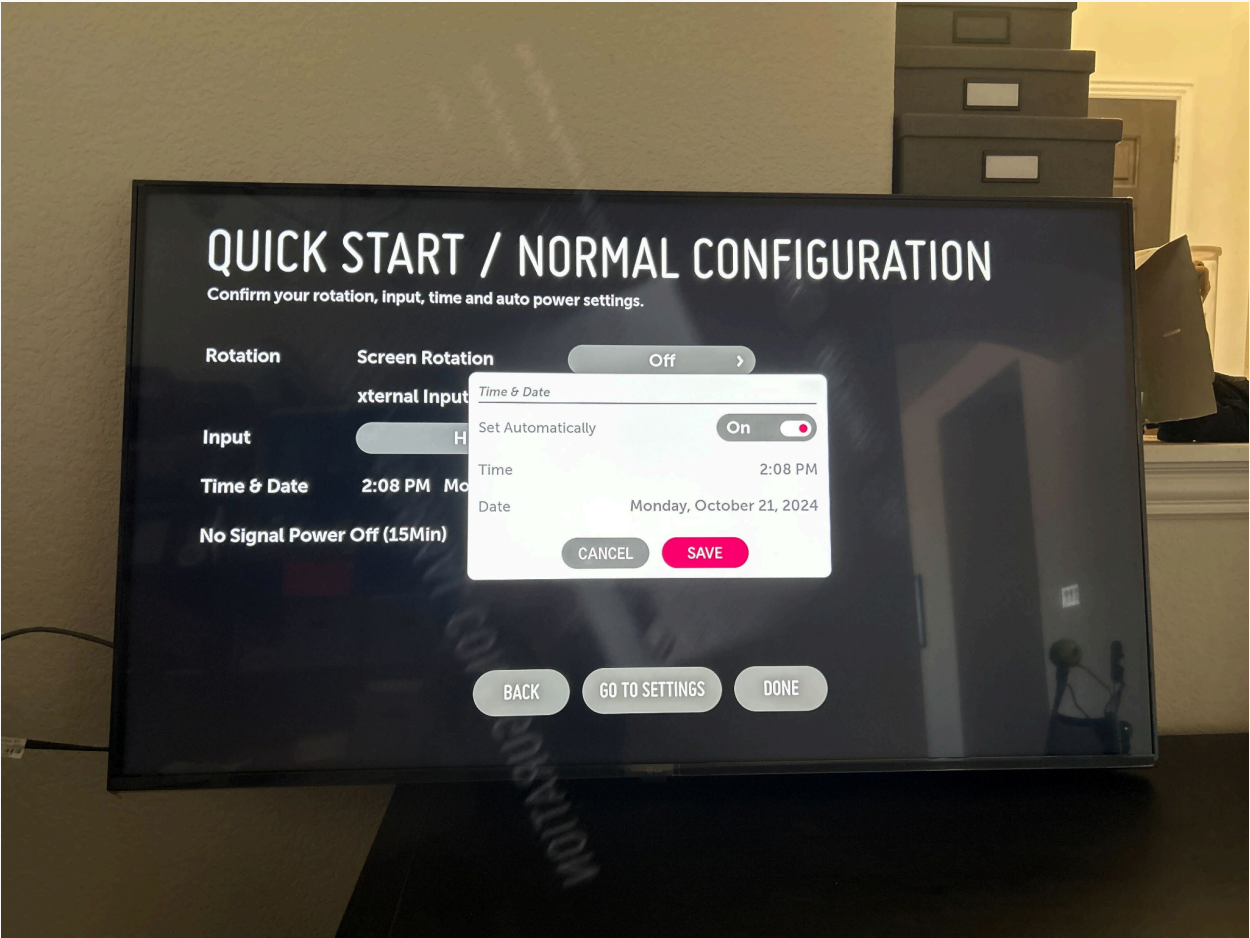

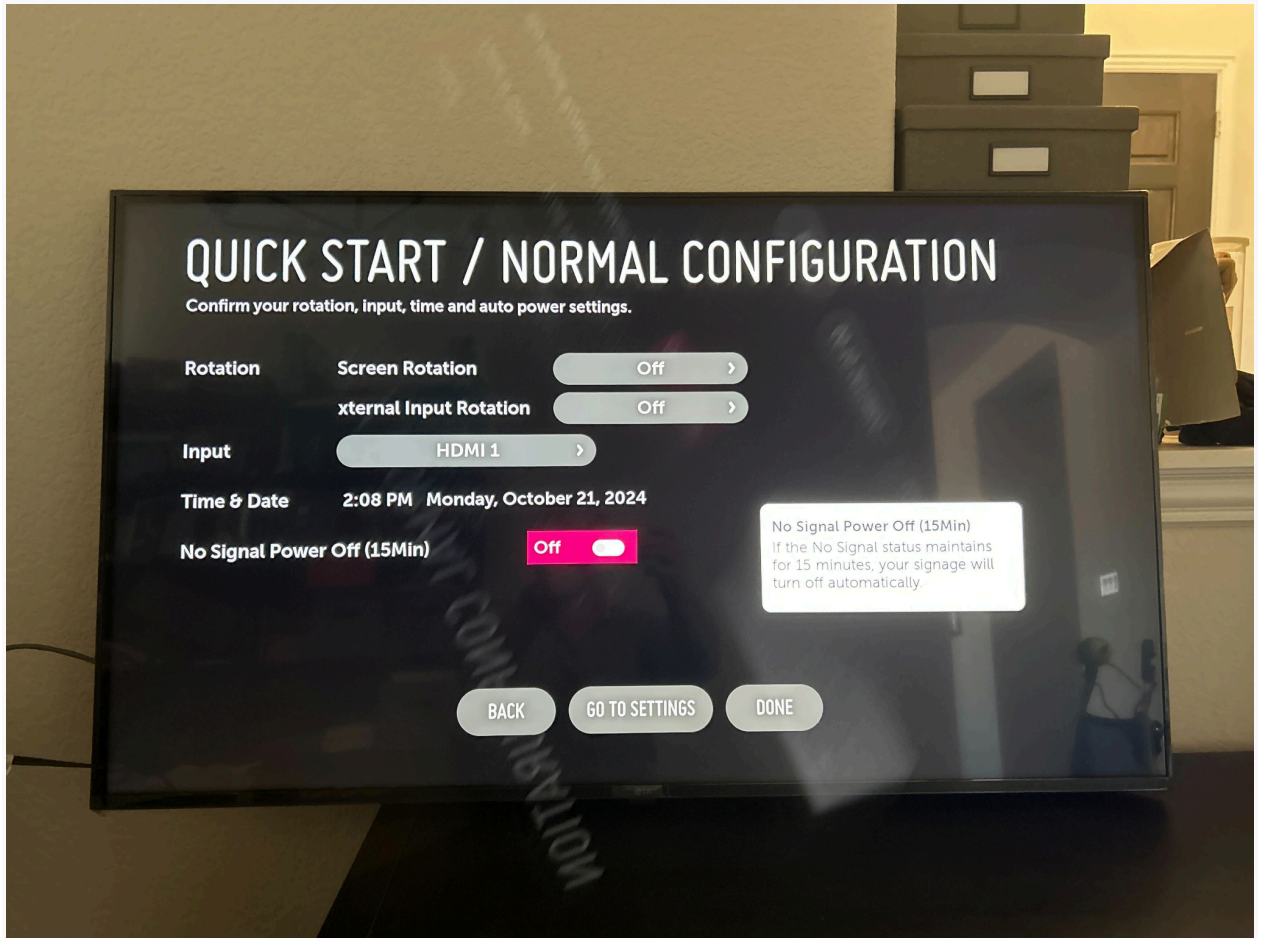

5. Press the "Settings" button, resembles a gear to the left of the "Up" arrow.




6. Navigate to SI Server setting and select.




7. Select SI Server setting again



8. Input proper URL provided by OSM. Fully qualified domain should be set to ON. OSM will provide the proper URL for each installation. When inputting the URL you must add lg.app.ipk to the end of the URL.

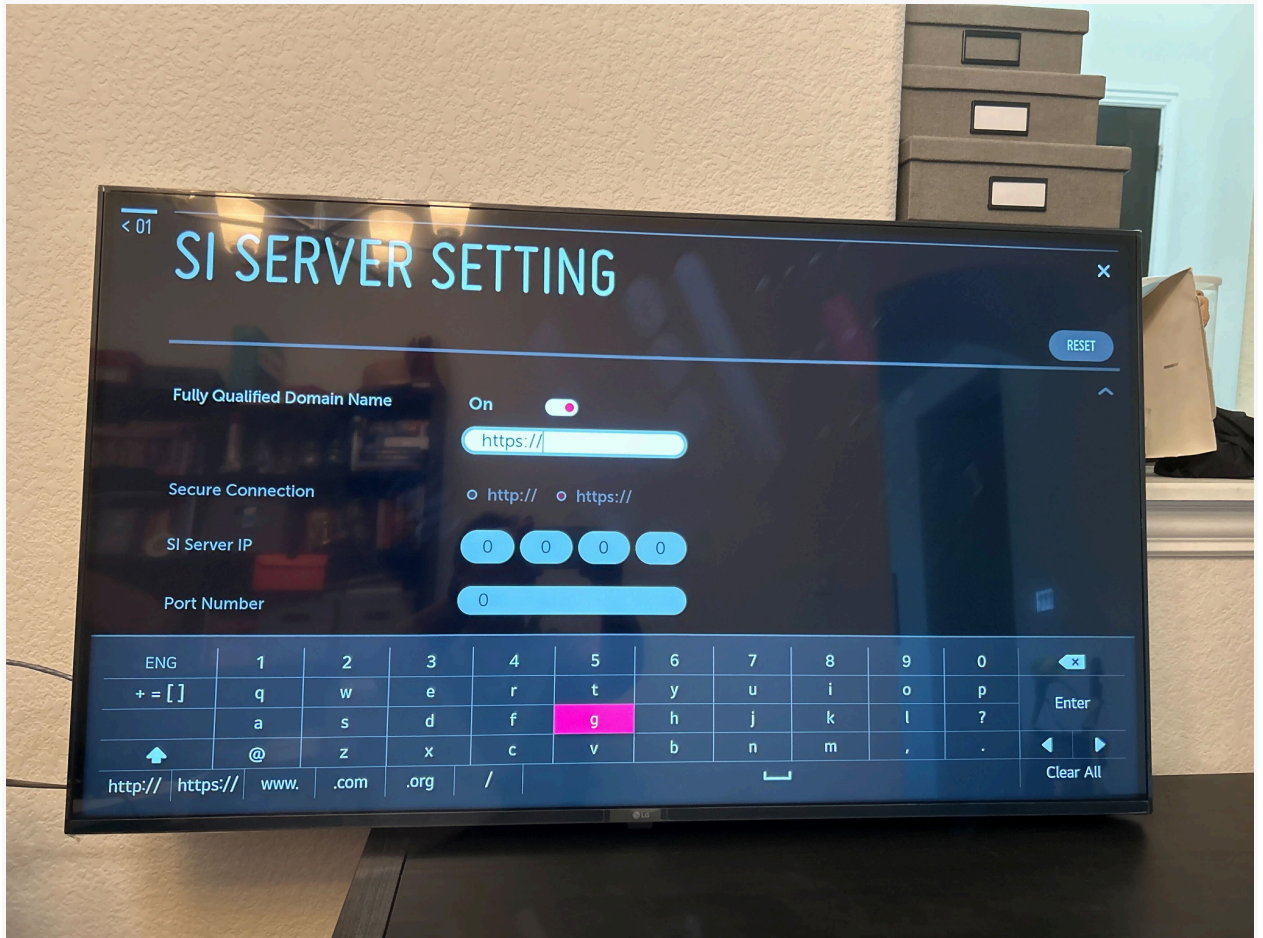

9. Secure connection should be https://. Application launch mode should be Local. Application type IPK. Local application upgrade should be Remote. Select Confirm.

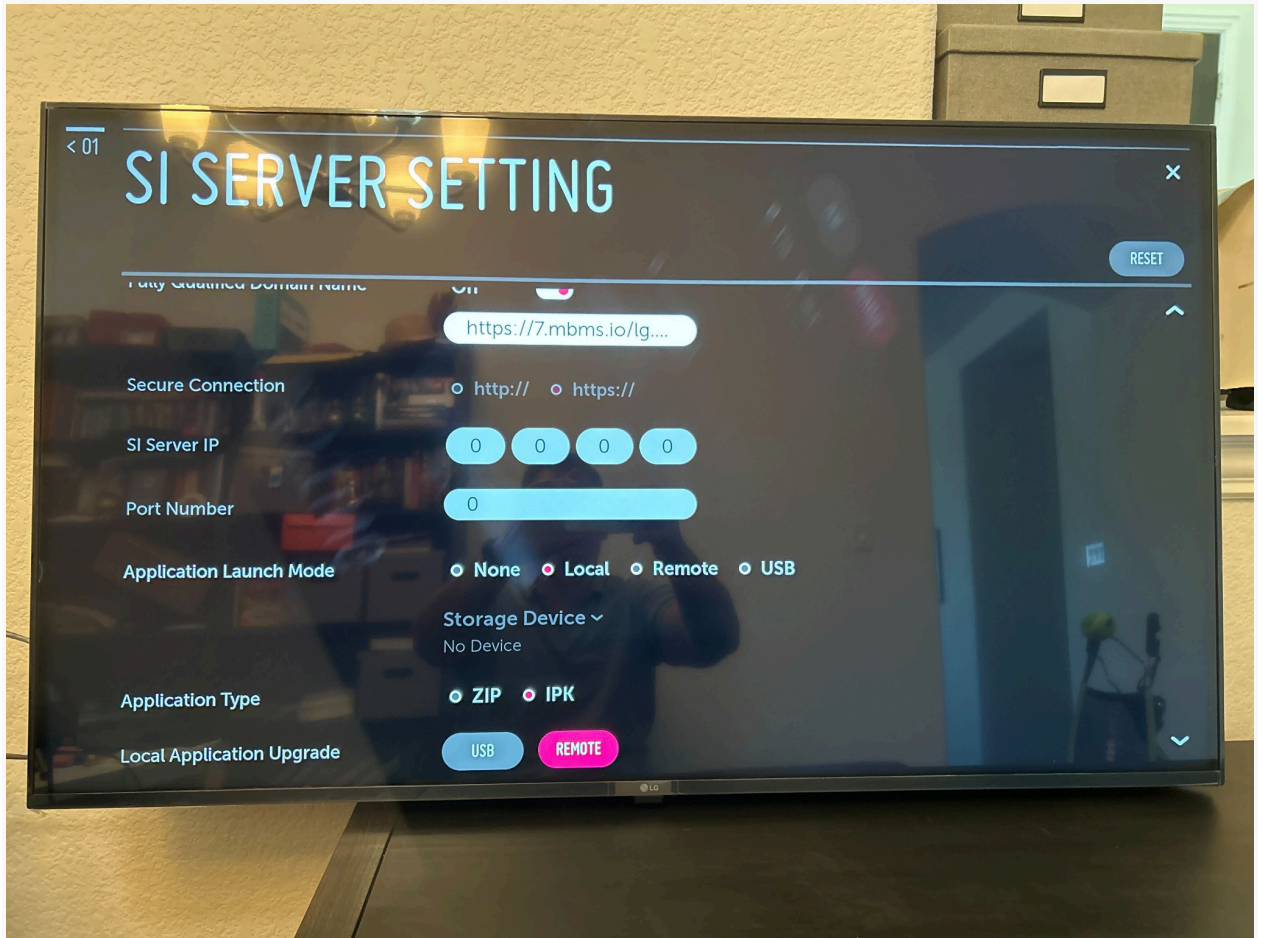

10. This screen will show. Nothing will happen. When application shows complete power cycle the display. Once power cycle is complete you should get the Menuboard Manager activation screen. Provide the last 4 digits of the registration code to OSM.



Provisioning should now be complete.

Troubleshooting and Factory Reset

Determine if the display is connected to the internet via the Home screen in the Network box.



If you need to uninstall the app for any reason. Select the home button. Navigate to Content management.

mbm-signage

webos App 4.12.2, Chrome 56

Dashboard



Signage Name

408MXLS11040 UL3J (03.6...



Set ID

1



Tile Mode

Off



DPM (Standby Mode)

On (10 min Off)



Network

Wired Connected (192.168....



Fail Over

Off




Play via URL

Off



Manual Download

<https://www.lg.co...>



**MENU BOARD
MANAGER**

Easy Sign Software for Restaurants



Content Management

scan this QR code



mbm-signage



Player

Play various content such as images, videos and SuperSign content.



Scheduler

Manage content schedules to play at different times.



Editor

Make your own content using templates and media files.




Group

Distribute content setting data to connected devices.



To factory reset you have to turn on the Admin setting and set a password.
Settings on remote control
Select Admin on the left of screen
Create a password
Once password is set you will have admin options. One of these is Factory reset.

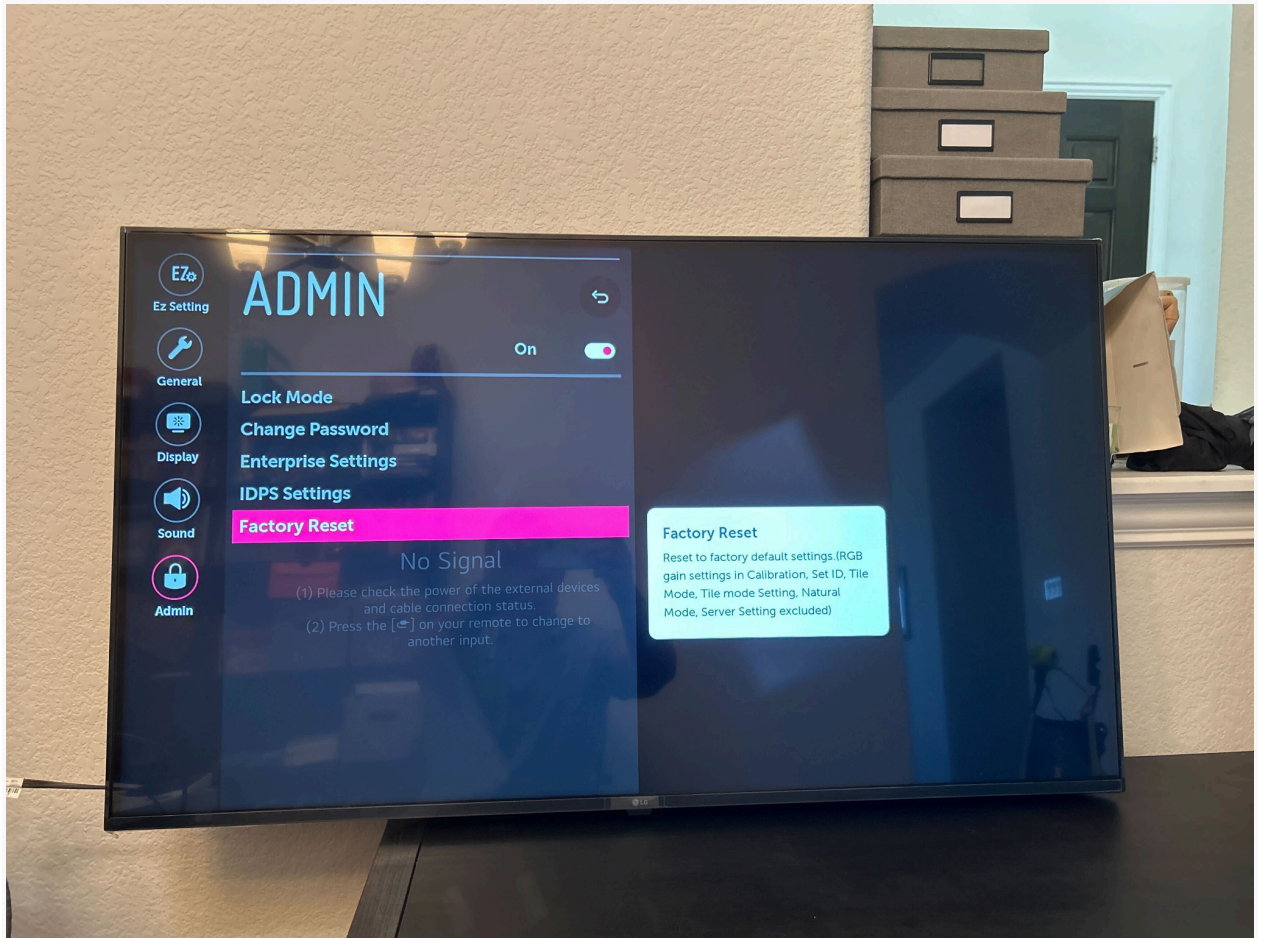

If you need to run the application from any source you can select the Home button on the remote and on the bottom left select the MBM application.