

Instruction of Flashing OS - 885TPC

1. Download the Diver Assistant and tool, and decompress.
2. Double click "DriverInstall.exe" under folder "DriverAssitant_v4.5" to install the driver.

> DriverAssitant_v4.5 >

名称	修改日期
ADBDriver	2015/10/8 9:18
bin	2015/10/8 9:18
Driver	2016/5/30 14:16
Log	2023/8/7 16:20
config	2014/6/3 15:38
DriverInstall	2016/5/30 14:02
Readme	2014/6/4 15:44

3. Click the left button to install.



4. Double click "FactoryTool.exe" to install the tool.

> FactoryTool_v1.53 >

名称	修改日期
bin	2017/12/28 11:15
Language	2017/12/28 11:15
config	2017/9/14 11:21
FactoryTool	2017/12/28 11:24

5. Click "Firmware", loading firmware is a little bit slow because of checking.



6. Click "Upgrade" or "Restore", Restore is different from upgrade in that more erase flash step

7. Click "Run", and the button turns green.




8. Connect both power adaptor and Micro USB cable into the Hub.



9. Plug adaptor (5V/2A) into AC socket, plug the USB cable of Hub into PC.

10. Turn off the tablet, and keep press the V- button of tablet, and insert the Micro USB cable into the tablet at the same time, while the "Upgrade Prompt" on the screen shows percent (Download Firmware (**%)), let the V- button go. "Download Firmware (**%)" means it's under upgrading.

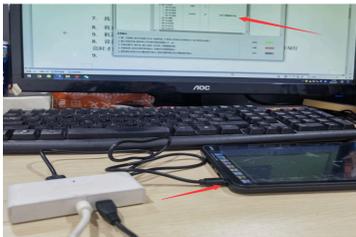

Device List	Device Type	ID	Upgrade Prompt
My Computer			
RootHub20			
Port[1]			
Port[2]			
Port[3]	Loader	9	Download Firmware(18%)...
Port[4]			
Port[5]			

11. After finished, it will said "Success" or "Fail", then pull out the Micro USB cable from the table. If success, it will auto-start up. If fail, the screen maybe freeze, keep pressing the power button to shut up and go to Step 10.

ID	Success	ID	Fail
9	1:23	9	Test Device Fail

Success: 00001

Fail: 00001

Total: 00002