

Connecting to the Cospace Canon printer

The quick version, for nerds!


- Download the drivers from <http://yk.st/canon>
- Manually connect to the printer using the IP address 10.4.1.23 and the LPD protocol.

Detailed Windows Instructions

Using a Mac? [Skip to page 17!](#)

Head to <http://yk.st/canon> and download the drivers OR get them off of the USB stick at the printer and [skip to page 4](#).

Click on “Software and Drivers”:

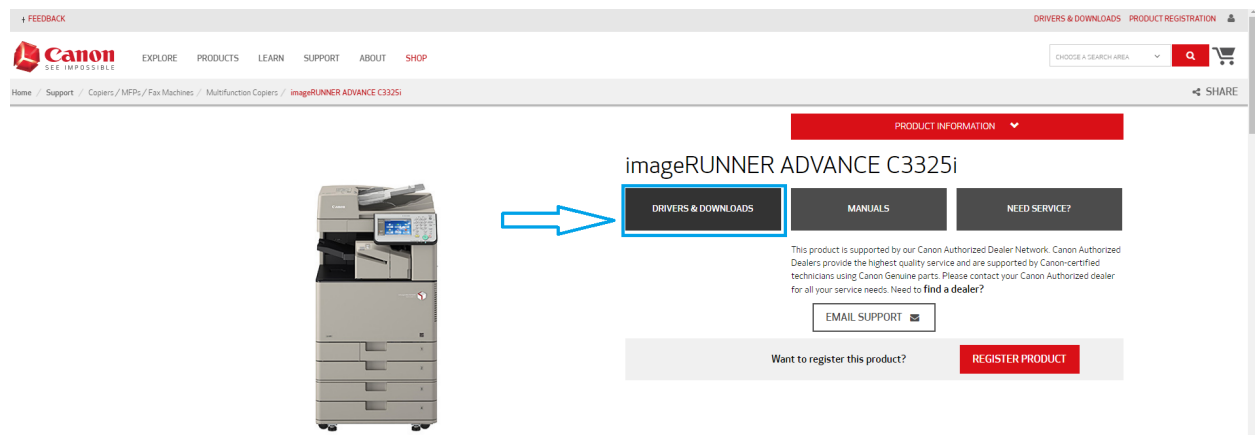

Enter your Windows version and download the driver that looks like:
Generic_Plus_UFRIL_v2.90_Set-up.exe

Canon SEE IMPOSSIBLE EXPLORE PRODUCTS LEARN SUPPORT ABOUT SHOP

CHOOSE A SEARCH AREA

Drivers & Downloads

Operating System: Windows 10 (x64) (Detected) Language: English

Drivers				Software	Firmware	Utilities
Recommended Driver(s)						
File Name	Date	File Size				
Generic_Plus_UFRIL_v2.20_Set-up_x64.exe	03/02/20	24.5 MB				SELECT
Optional Driver(s)						
File Name	Date	File Size				
Generic_Plus_PCL6_v2.11_Set-up_x64.exe	02/12/20	22.6 MB				SELECT
Generic_Plus_P53_v2.11_Set-up_x64.exe	02/12/20	21.4 MB				SELECT

Click on download

Canon SEE IMPOSSIBLE EXPLORE PRODUCTS LEARN SUPPORT ABOUT SHOP


CHOOSE A SEARCH AREA

Drivers & Downloads


Operating System: Windows 10 (x64) (Detected) Language: English

Drivers				Software	Firmware	Utilities
Recommended Driver(s)						
File Name	Date	File Size				
Generic_Plus_UFRIL_v2.20_Set-up_x64.exe	03/02/20	24.5 MB				CLOSE
Generic Plus UFRIL v2.20 Setup Installer for Windows 7/Windows 8.1/Windows 10/Server 2008 SP2/Server 2008 R2/Server 2008 R2 SP1/Server 2012/Server 2012 R2/Server 2016/Server 2019 x64						
File name		Supporting Documents				
Generic_Plus_UFRIL_v2.20_Set-up_x64.exe		DOWNLOAD				
Optional Driver(s)						
File Name	Date	File Size				
Generic_Plus_PCL6_v2.11_Set-up_x64.exe	02/12/20	22.6 MB				SELECT
Generic_Plus_P53_v2.11_Set-up_x64.exe	02/12/20	21.4 MB				SELECT

Click on the download if a window doesn't come up automatically, then save the download somewhere you can find it. Then unzip it to the same file location.

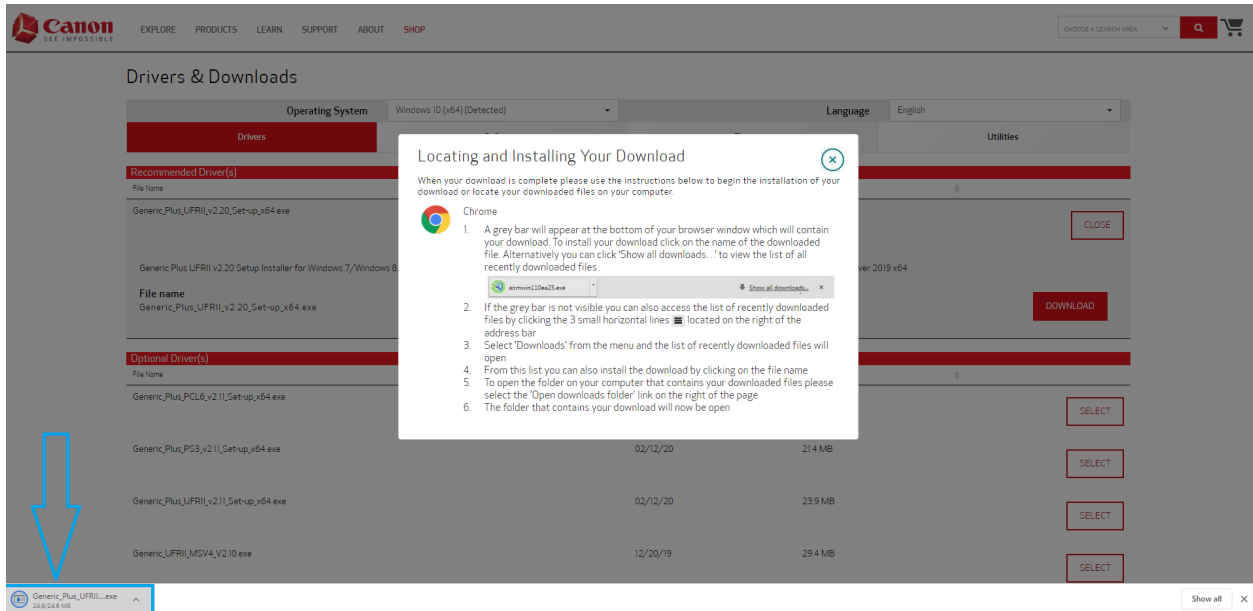


If you couldn't open the downloaded file but saved it on your computer, you will find it in the folder Downloads.

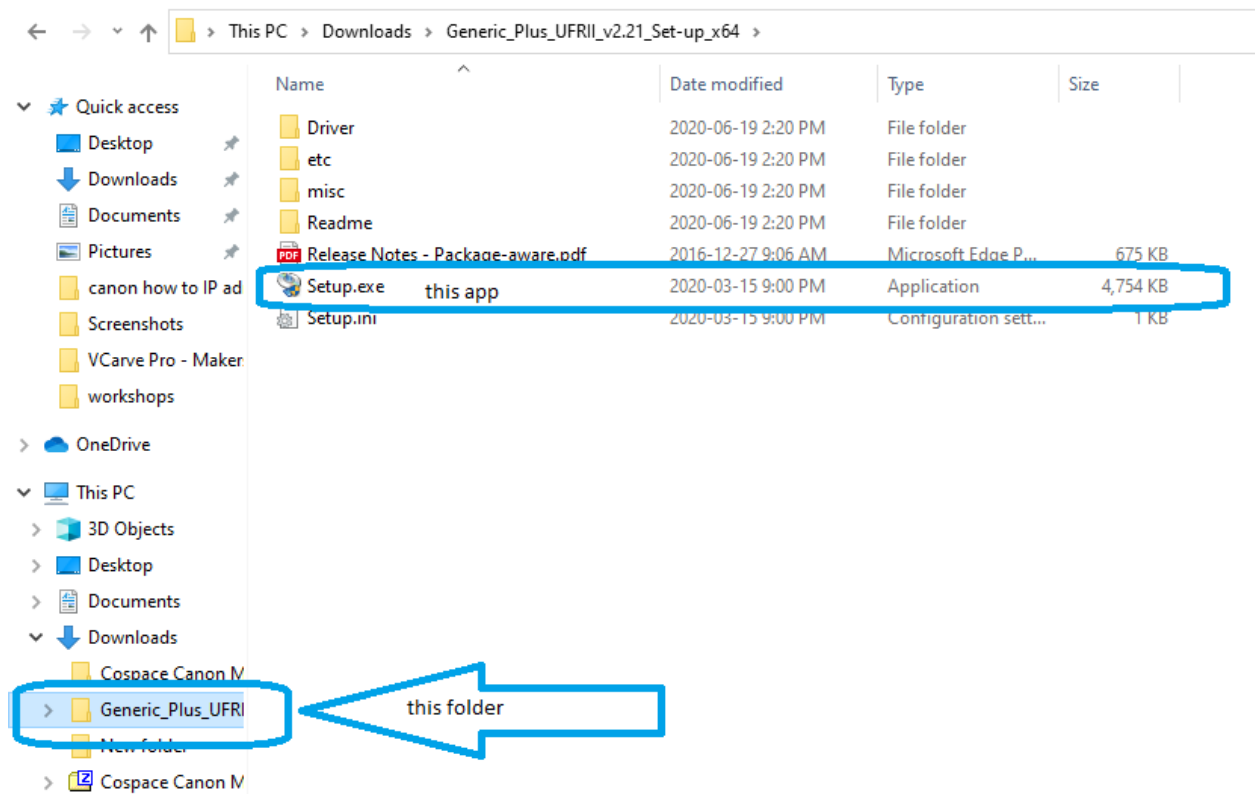


Run the setup app


Double click the setup icon in the folder

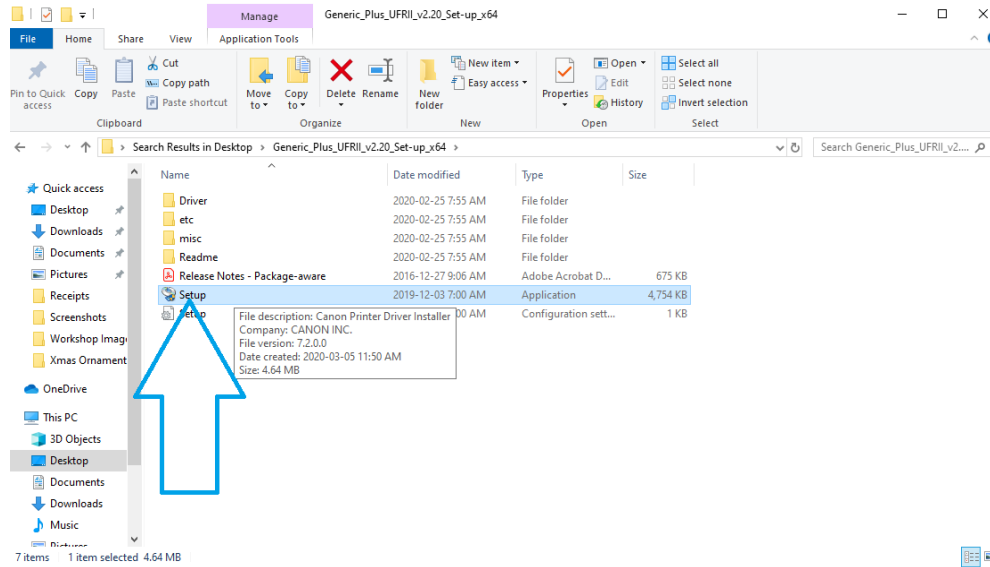


Choose a language and click next

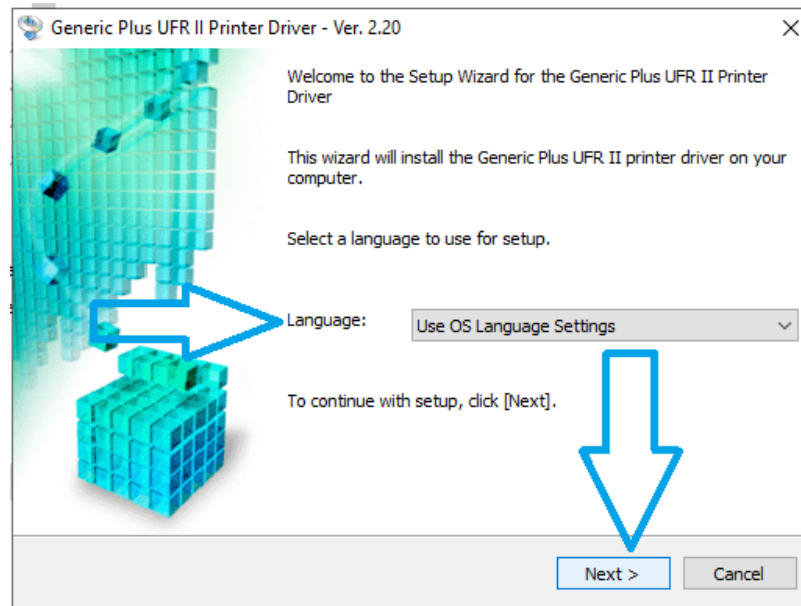


Specify "custom" and then click Next.

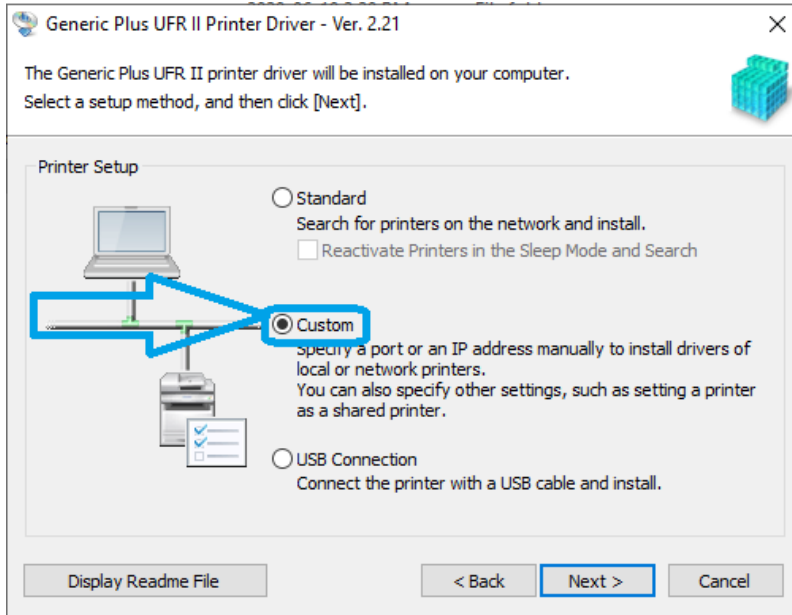

Click on “add new printers” then click “NEXT”


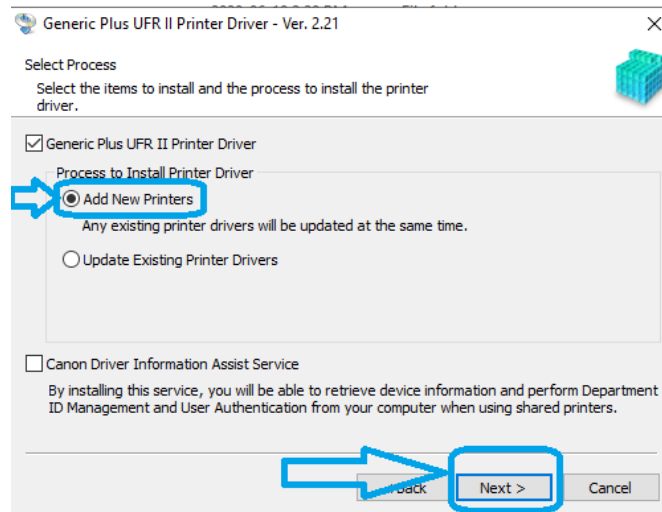


Check the auto select box, then click next

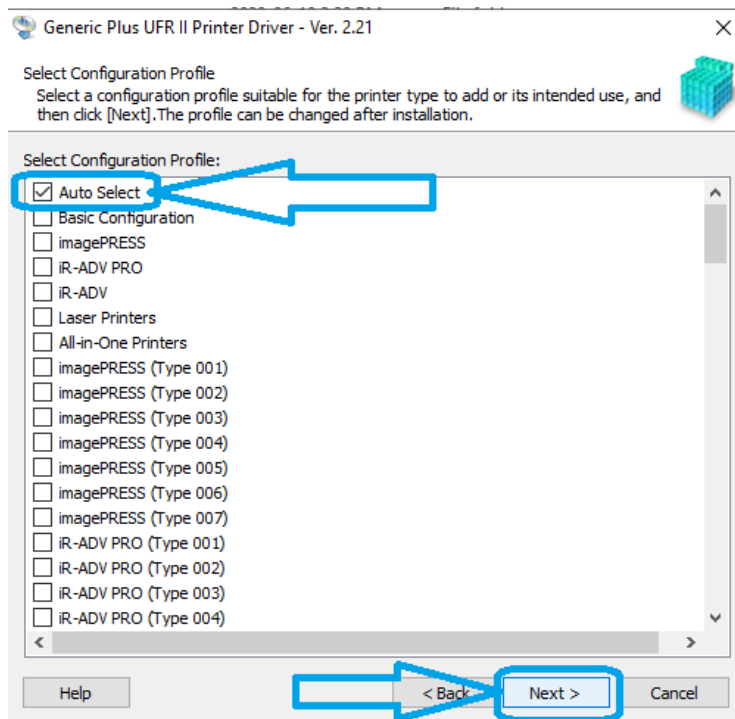


Check set as “default” box, name printer “Canon Cospace Printer”, then click on port: not set


Select IP_10.3.0.23 From the dropdown menu, then left click Next

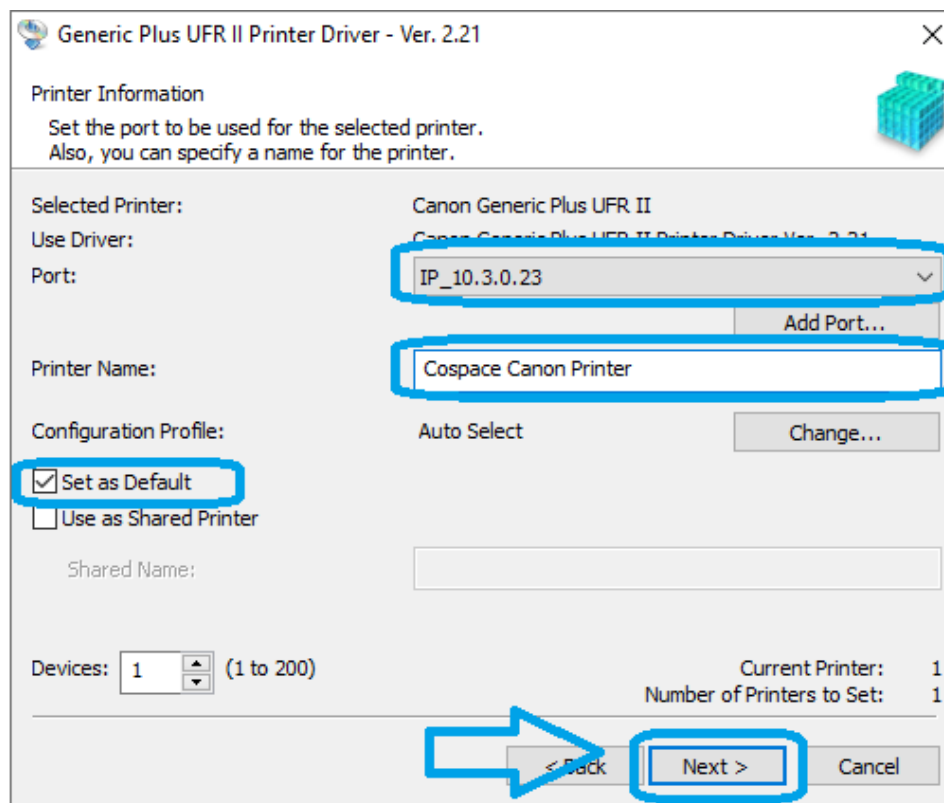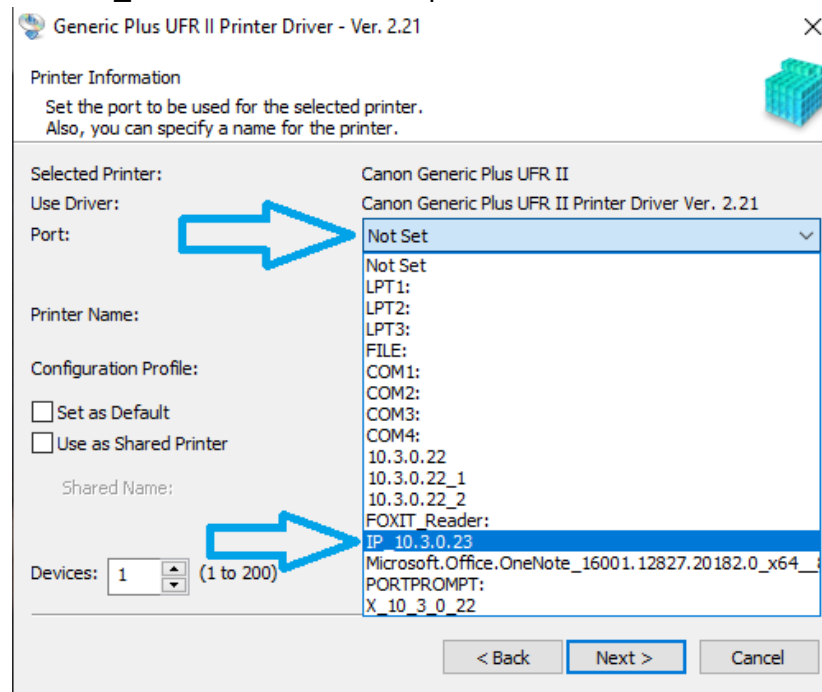


Click on the cospace canon printer in the list, then click on “Select printers to update”

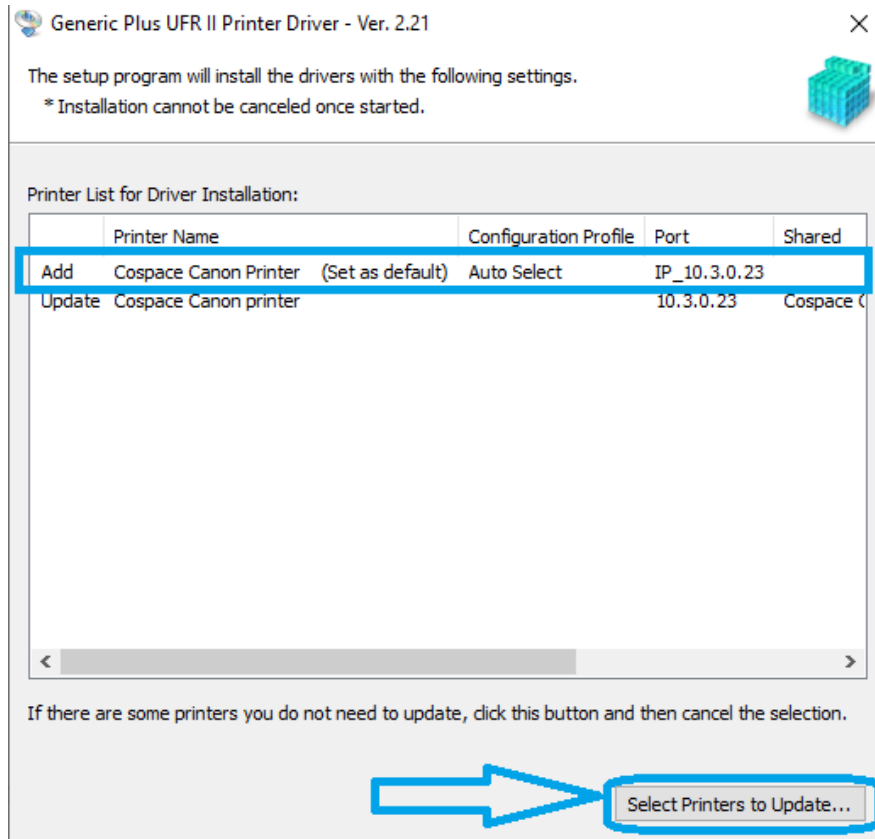

The drivers will be installed

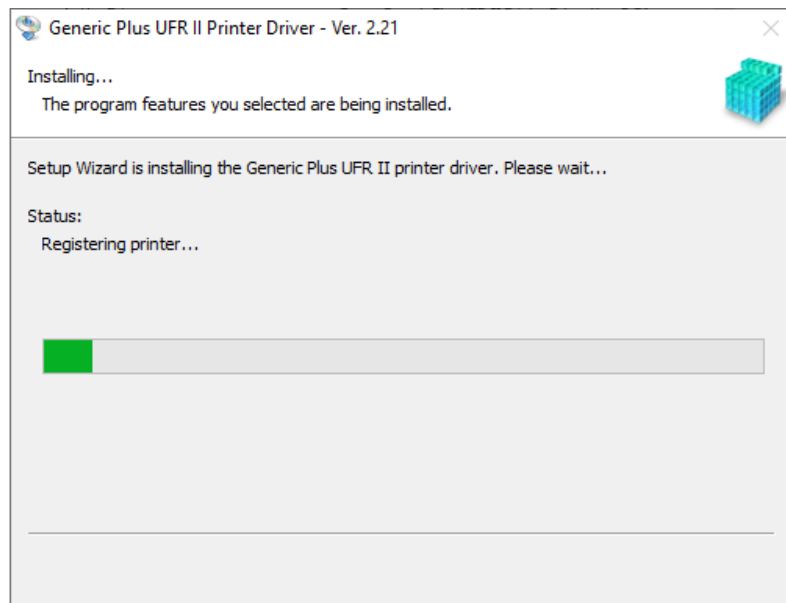


When it is finished installing click restart

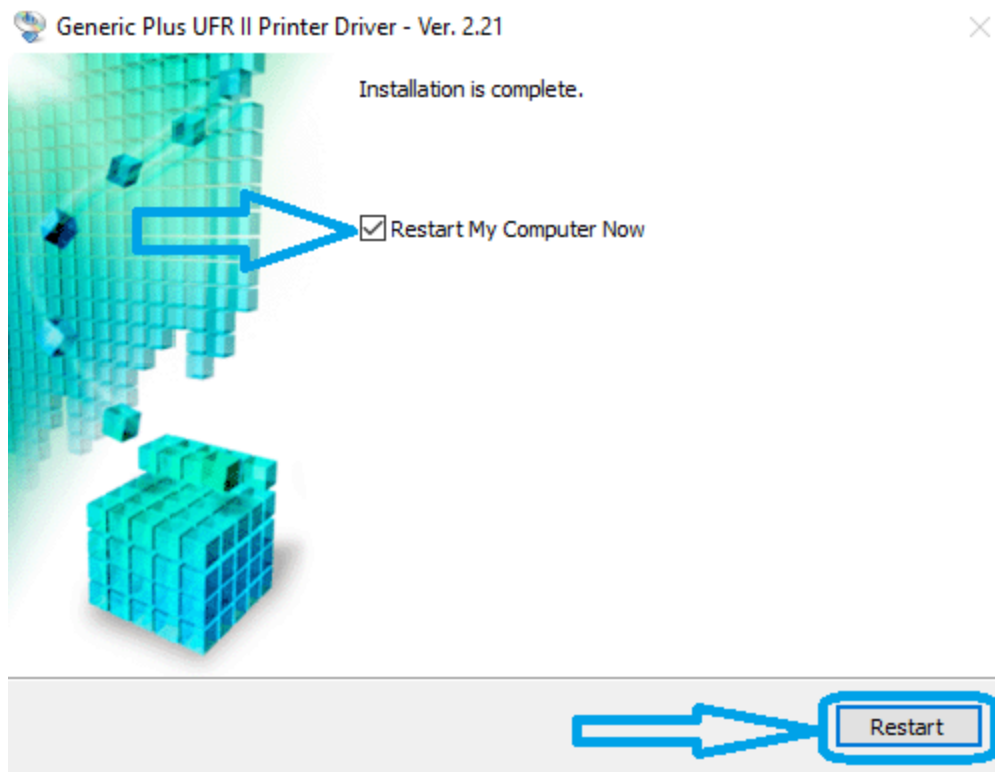

When your computer restarts the drivers will be installed and the printer should be ready to use as the default printer. If not, read on!


If you still can't print to the printer

Click on the windows Start button, then on settings

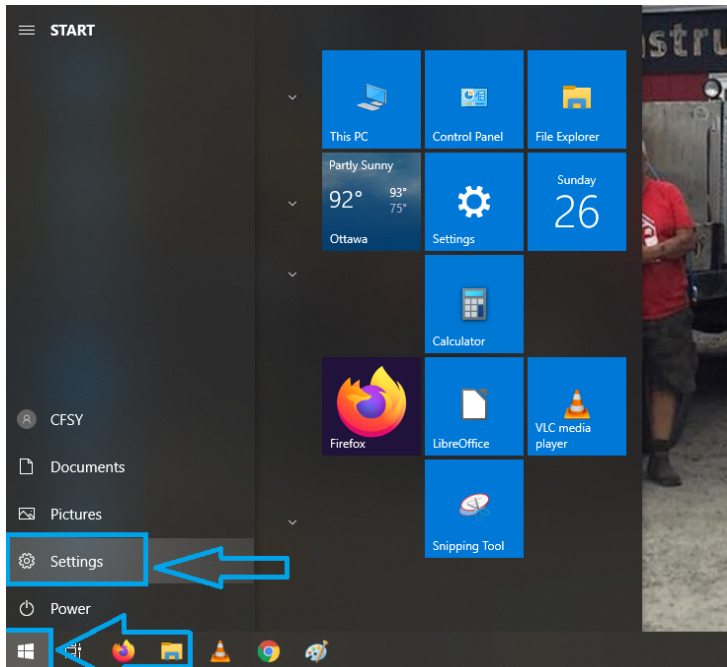


Click on Devices


Settings

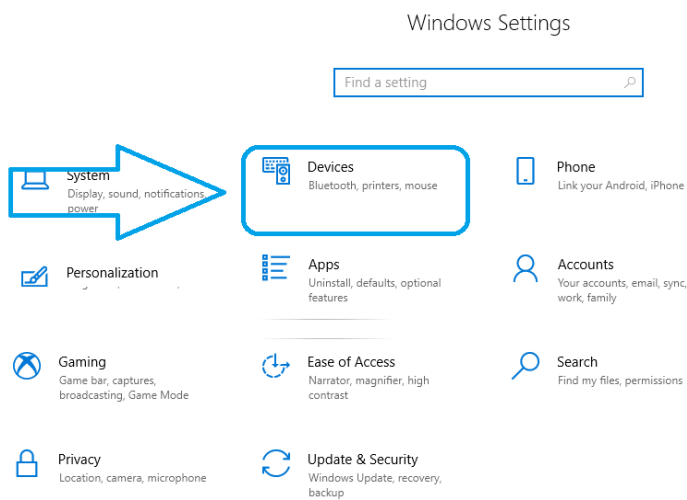

Click on Printers and scanners

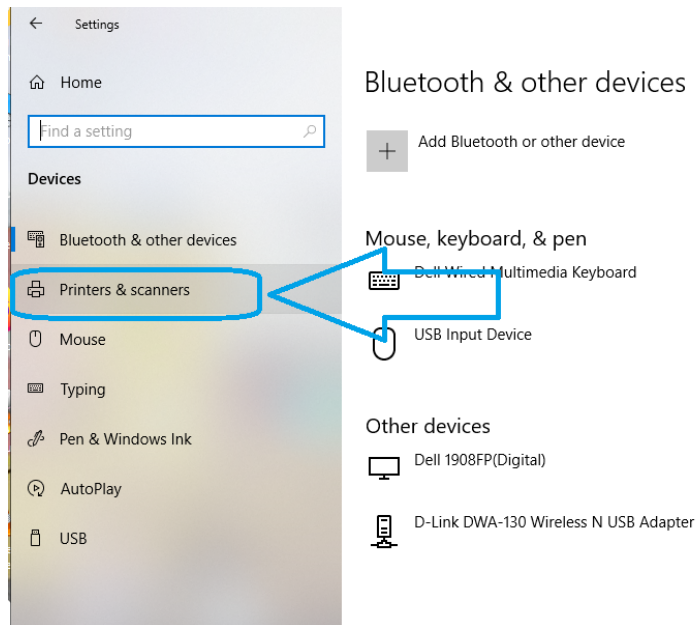

Click add a printer or scanner

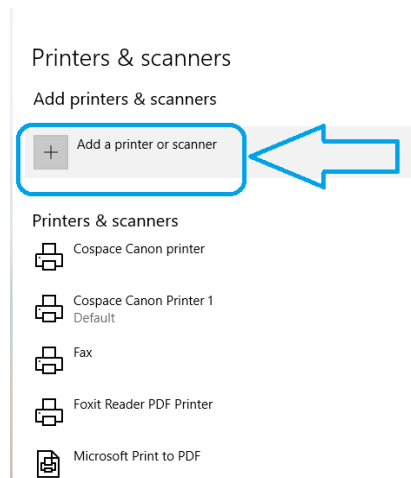

Click “The Printer that I want isn’t listed”

Printers & scanners

Add printers & scanners



Refresh

Searching for printers and scanners



EPSONC8A10B (WF-3720 Series)
Multi Function Printer, Printer, Scanner



Brother MFC-J6910DW [0080929bb677]
Multi Function Printer, Printer



HP16B4F9 (HP Officejet Pro 8600)
Printer, Ink-jet printer, Scanner, Fax



Brother MFC-J6520DW [30055c2c62b3]
Multi Function Printer, Printer, Scanner




EPSOND4512A (ET-7750 Series)
Multi Function Printer, Printer, Scanner


The printer that I want isn't listed



Click bubble “Add a printer using a TCP/IP address or hostname”

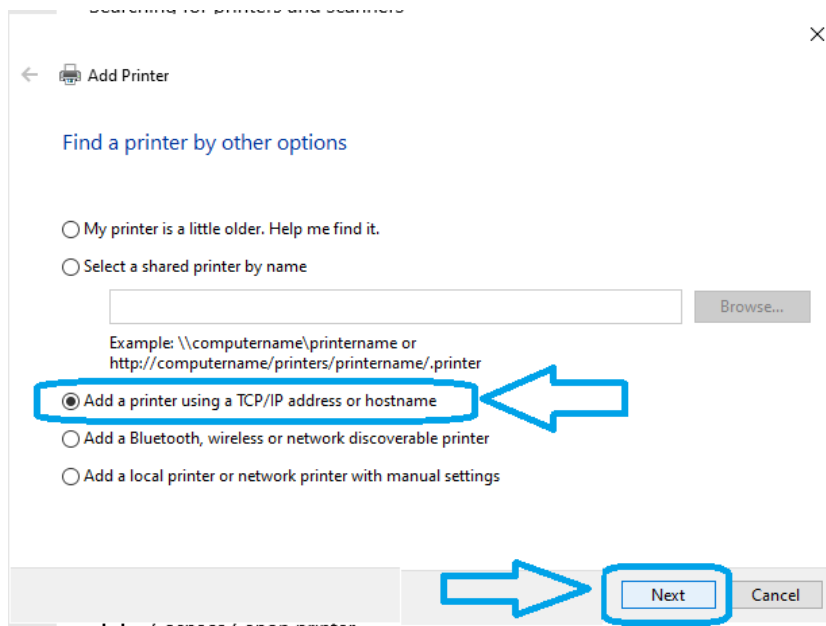

Fill in “hostname or IP address” 10.3.0.23, port name should autofill the same. Check box “Query the printer and automatically select the drivers to use. Click Next.

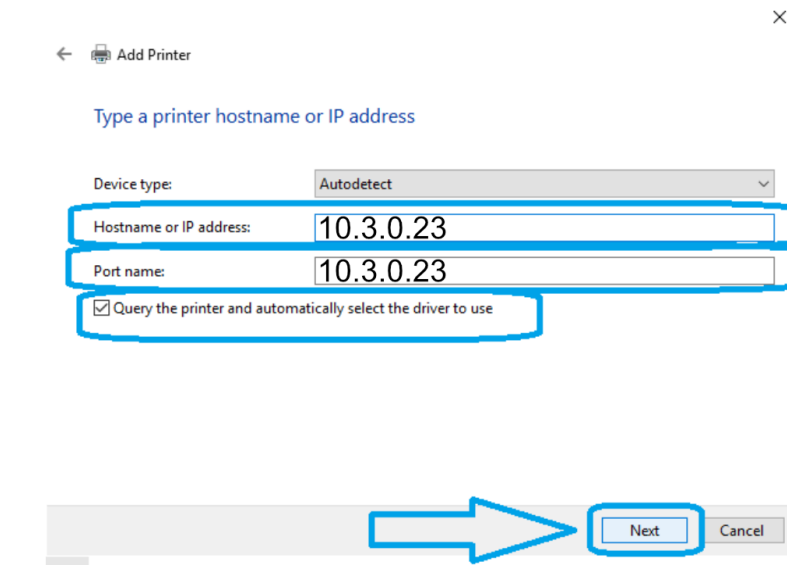

← Add Printer ×

Type a printer hostname or IP address

Device type: Autodetect


Hostname or IP address: 10.3.0.23

Port name: 10.3.0.23

☒ Query the printer and automatically select the driver to use

Next Cancel

Make sure “Use the driver currently installed” is checked then click next.

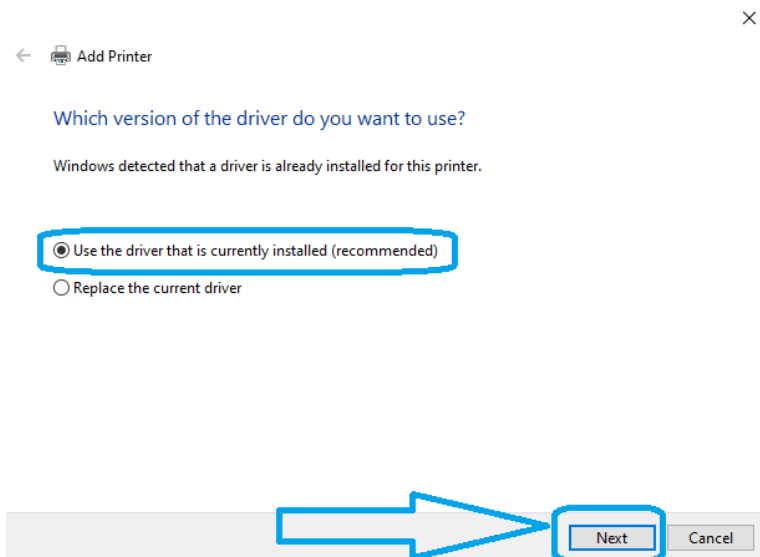

← Add Printer ×

Which version of the driver do you want to use?

Windows detected that a driver is already installed for this printer.

☒ Use the driver that is currently installed (recommended)

☐ Replace the current driver

Next Cancel

Name the printer “Canon Cospace Printer” then click next.

← Add Printer

Type a printer name

Printer name:

This printer will be installed with the Canon Generic Plus UFR II driver.

→

Share this printer should be checked, name the printer “Canon Cospace Printer” then click Next

← Add Printer

Printer Sharing

If you want to share this printer, you must provide a share name. You can use the suggested name or type a new one. The share name will be visible to other network users.

☐ Do not share this printer

☒ Share this printer so that others on your network can find and use it

Share name:

Location:

Comment:

→

If you've made it this far Congratulations you're almost done! Check "set as default printer". You can click "Print a test page" if you want to, then click "Finish"

← Add Printer

You've successfully added Canon Cospace Printer

☒ Set as the default printer

To check if your printer is working properly, or to see troubleshooting information for the printer, print a test page

You're done!

Detailed Apple Instructions

Head to <http://yk.st/canon> and download the drivers OR get them off the USB stick at the printer and skip to the next page.

Select the version of OS X you're using from the dropdown and select the recommended driver.

Canon SEE IMPOSSIBLE EXPLORE PRODUCTS LEARN SUPPORT ABOUT SHOP

CHOOSE A SEARCH AREA

Drivers & Downloads

Operating System	OS X El Capitan v10.11 (Detectec)	Language	English
Drivers	Software	Firmware	Utilities

Recommended Driver(s)

File Name	Date	File Size
UFRILv10.19.3_Mac.zip	07/02/20	62.2 MB

Optional Driver(s)

File Name	Date	File Size
FAX_v4.15.4_Mac.zip	07/15/20	15.3 MB
P5_v4.17.3_Mac.zip	07/02/20	38.3 MB

Canon SEE IMPOSSIBLE EXPLORE PRODUCTS LEARN SUPPORT ABOUT SHOP

CHOOSE A SEARCH AREA

Drivers & Downloads

Operating System	OS X El Capitan v10.11 (Detectec)	Language	English
Drivers	Software	Firmware	Utilities


Recommended Driver(s)

File Name	Date	File Size
UFRILv10.19.3_Mac.zip	07/02/20	62.2 MB



Optional Driver(s)

File Name	Date	File Size
FAX_v4.15.4_Mac.zip	07/15/20	15.3 MB
P5_v4.17.3_Mac.zip	07/02/20	38.3 MB




Download the recommended driver


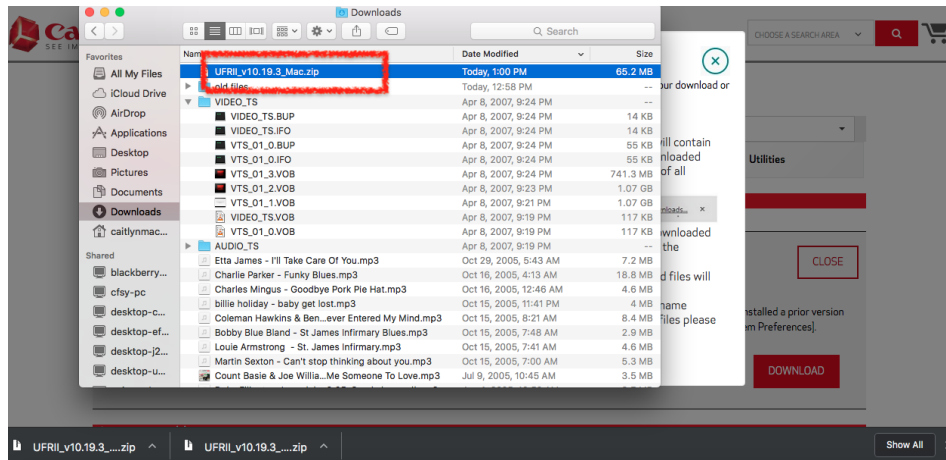


Double-click zip to unzip

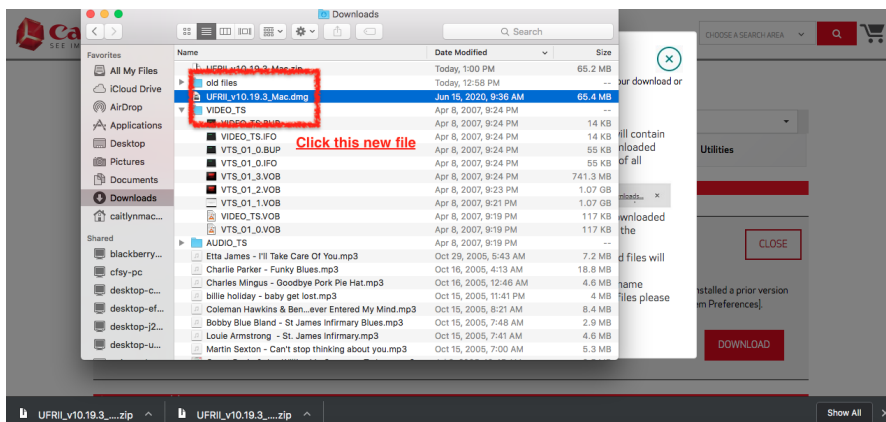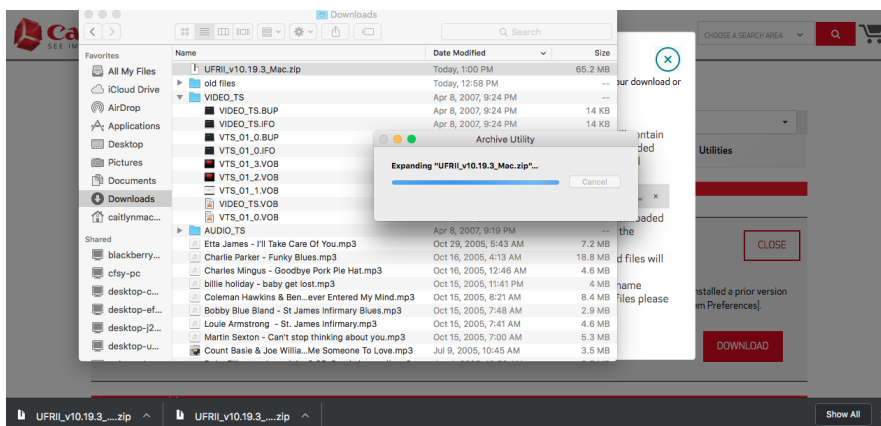


Double-click .dmg to begin installation Click "Continue" and "Agree" until installed. You may need to enter your password.

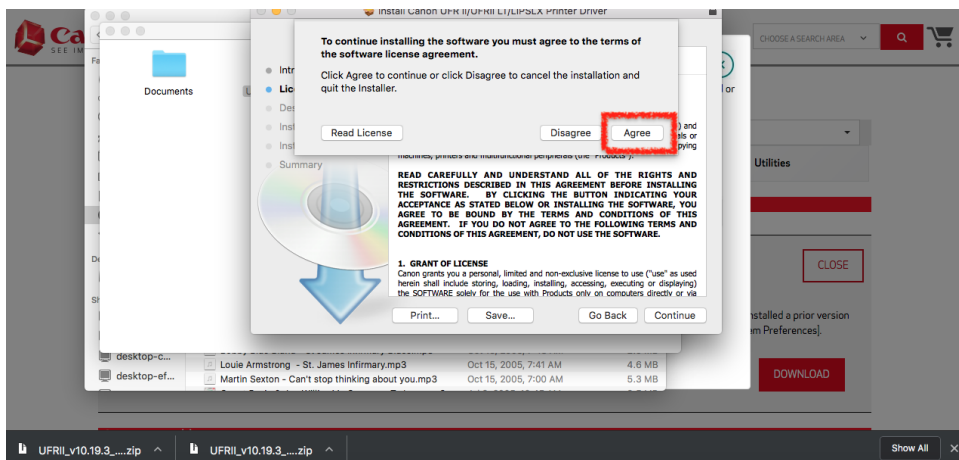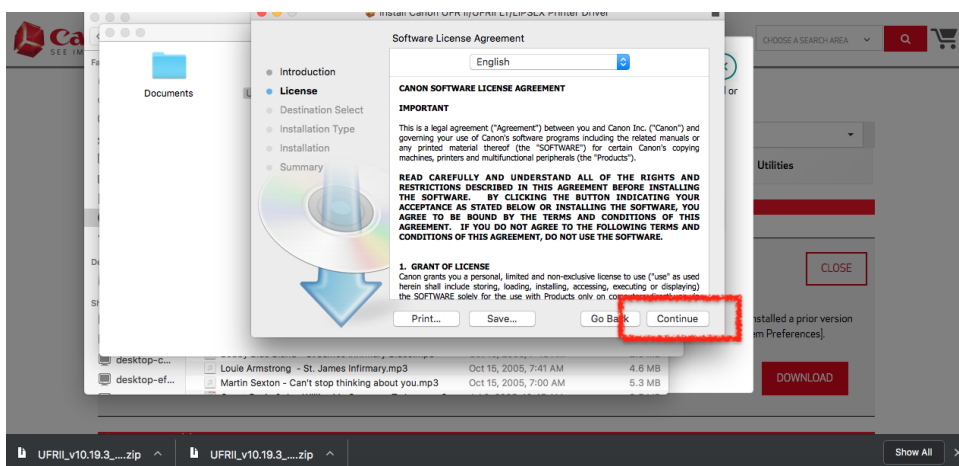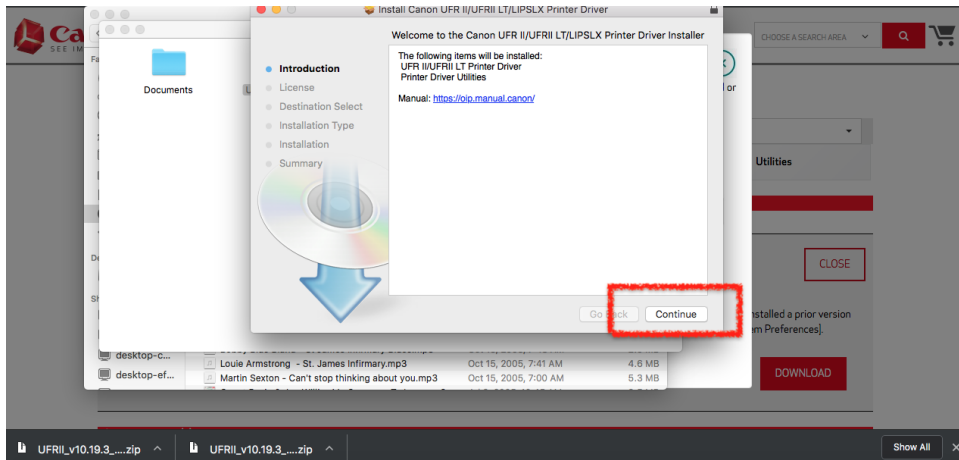


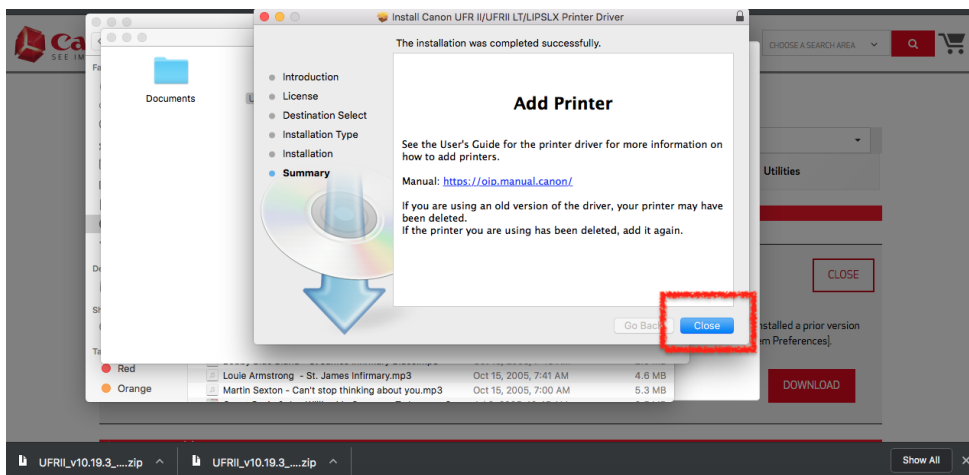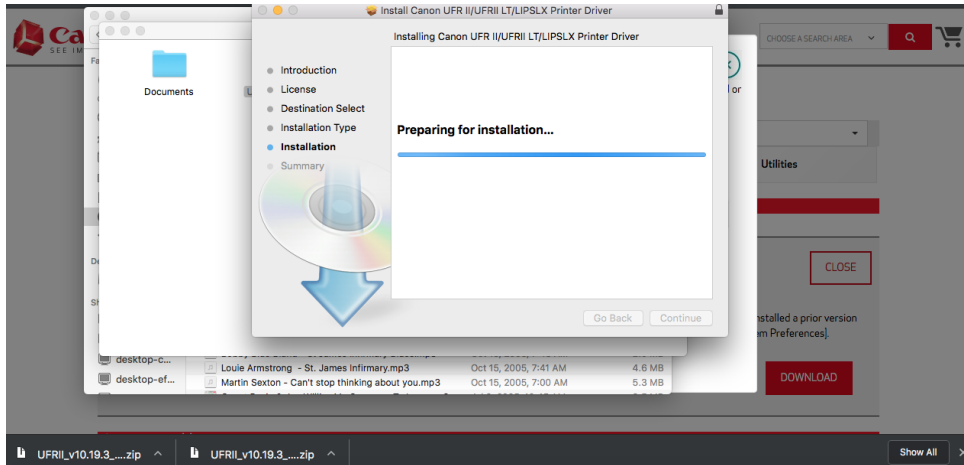


Click "Install"


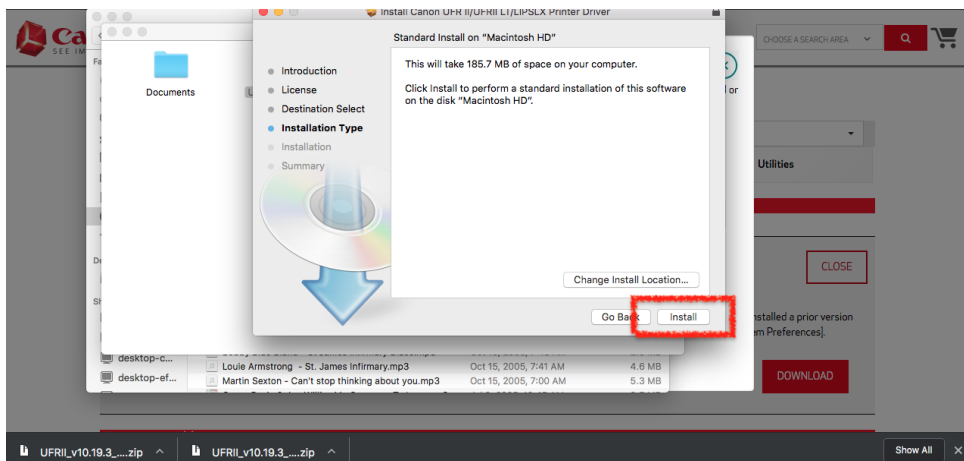


Go to “System Preferences”

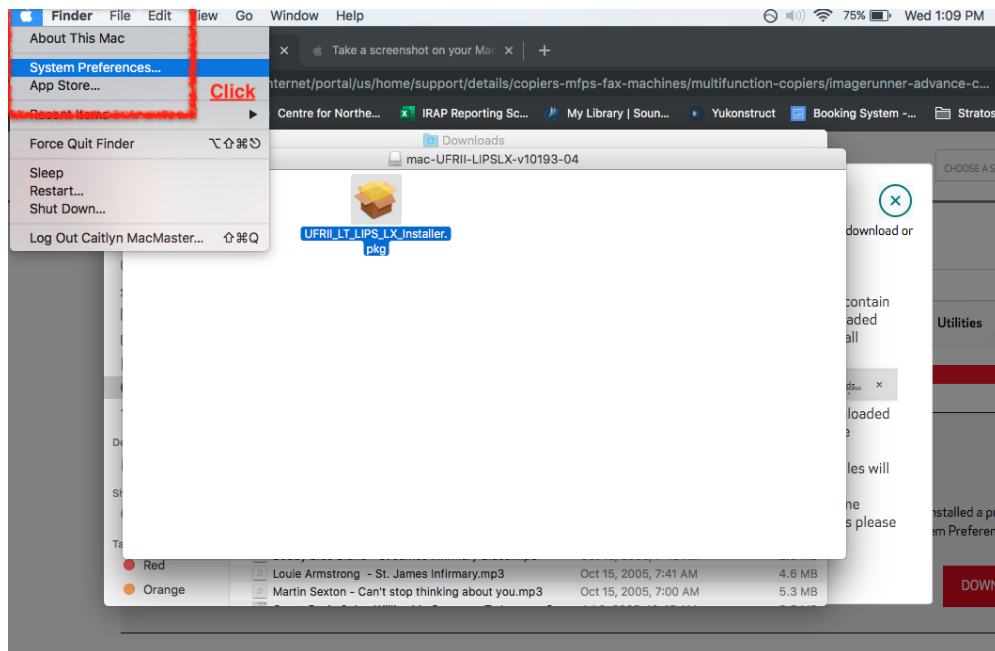




Go to “Printers & Scanners”

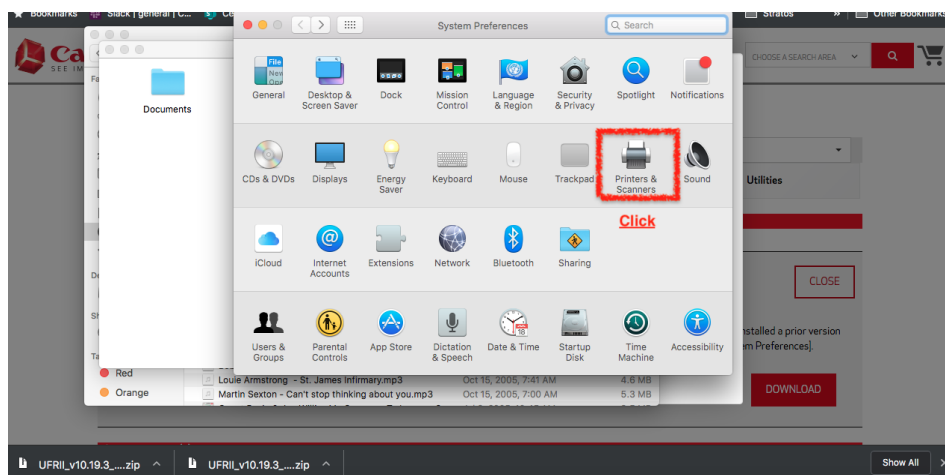


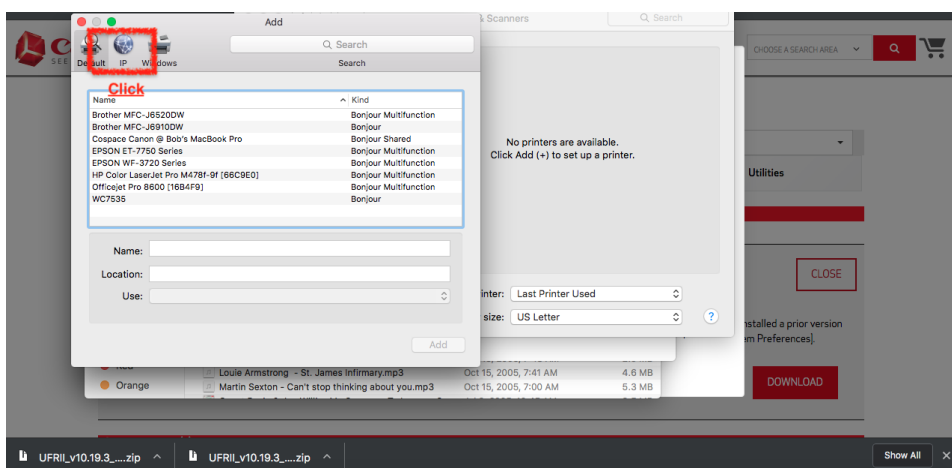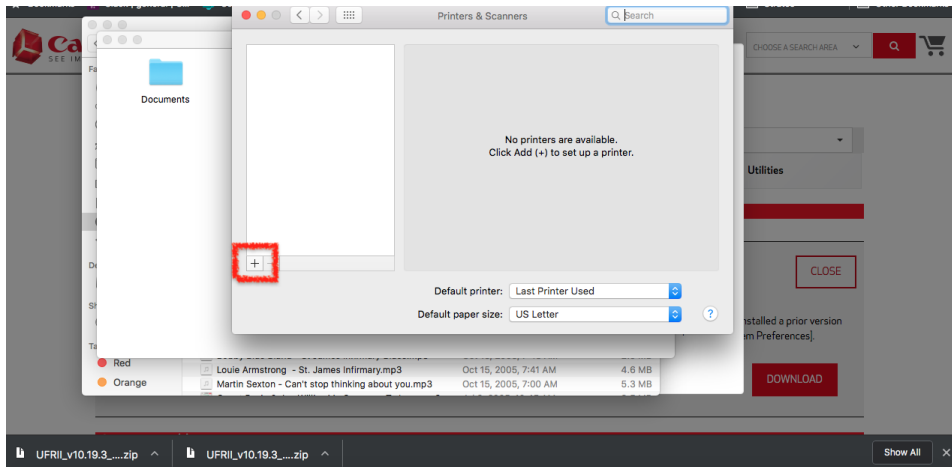

If you see the "Canon iR-ADV C3325/3330", click on it. Otherwise, go to the "IP" tab. ENTER 10.3.0.23 as the IP, "LPD" as the protocol, "Cospace printer" as the name, and "Select Software" under "Use"

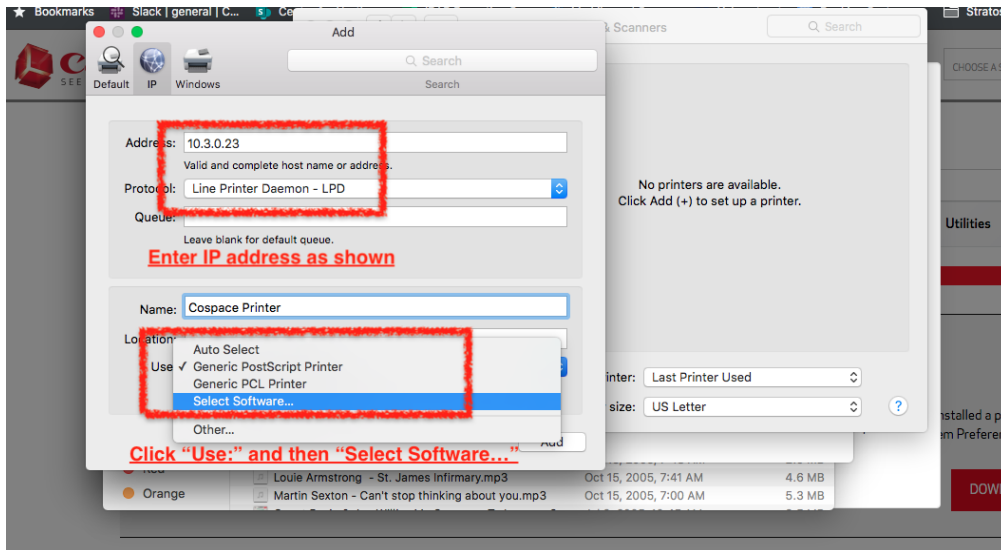

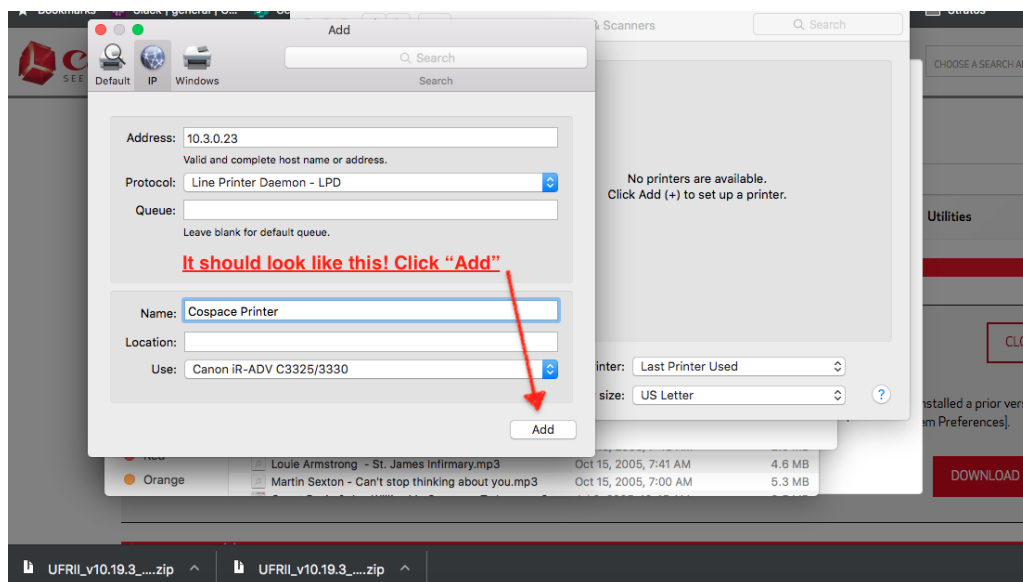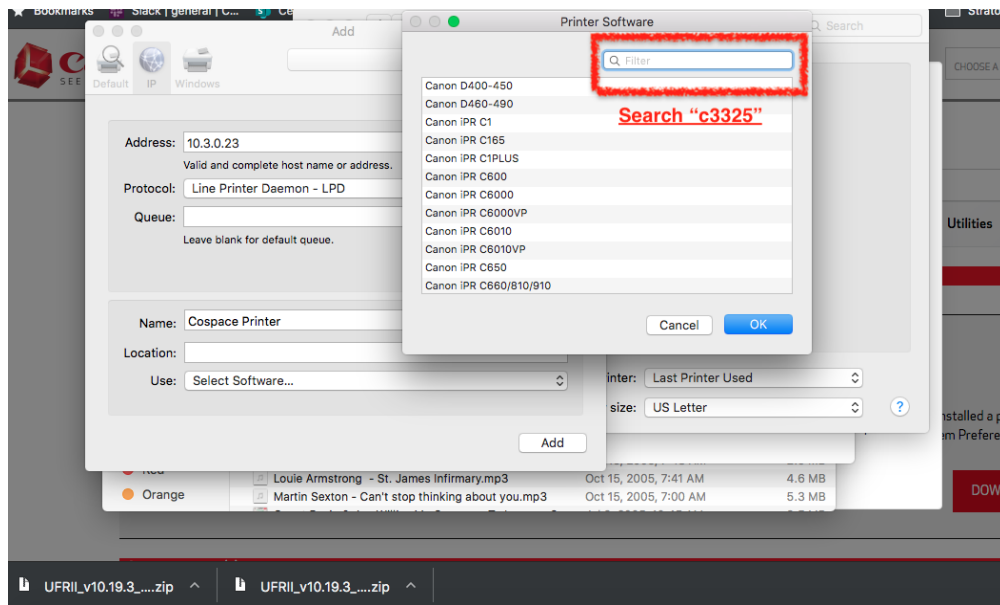

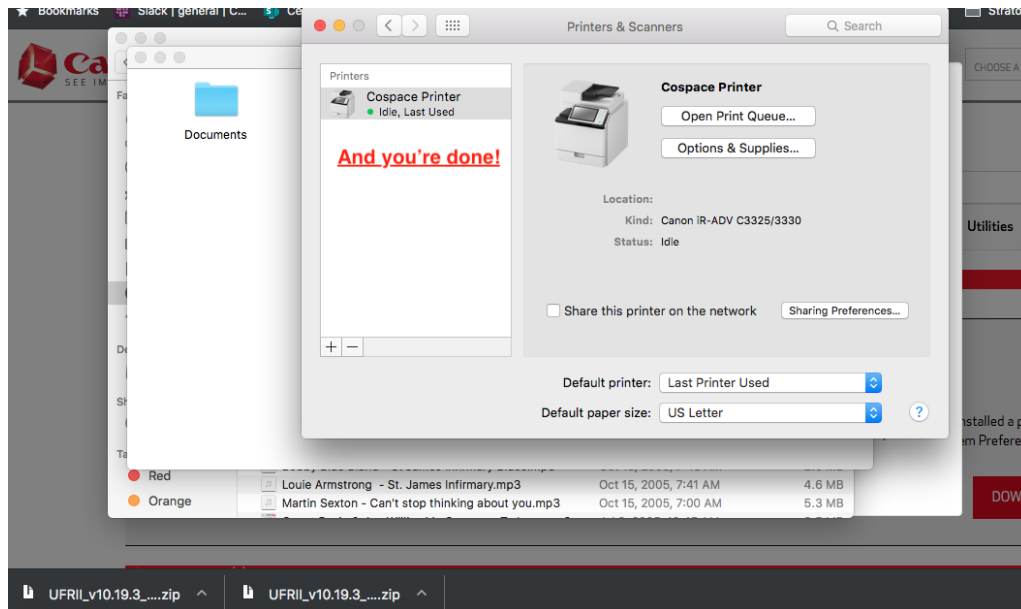

You're done!