How to use Amlogic USB Burning Tool

Tool for ANDROID 9.0: [Amlogic_USB_Burning_Tool_v2.1.7.0.](#)
Tool for Android 11.0: [Amlogic_USB_Burning_Tool_v3.2.0.](#)

These are instructions on how to use Amlogic USB Burning Tool to flash or install the Stock Firmware on Mobile devices powered by Amlogic Chipset.
**Caution:** Flashing or installing Firmware using the Amlogic Flash Tool will wipe the data from the device.Therefore, we recommend you take a backup of your data before using the tool.

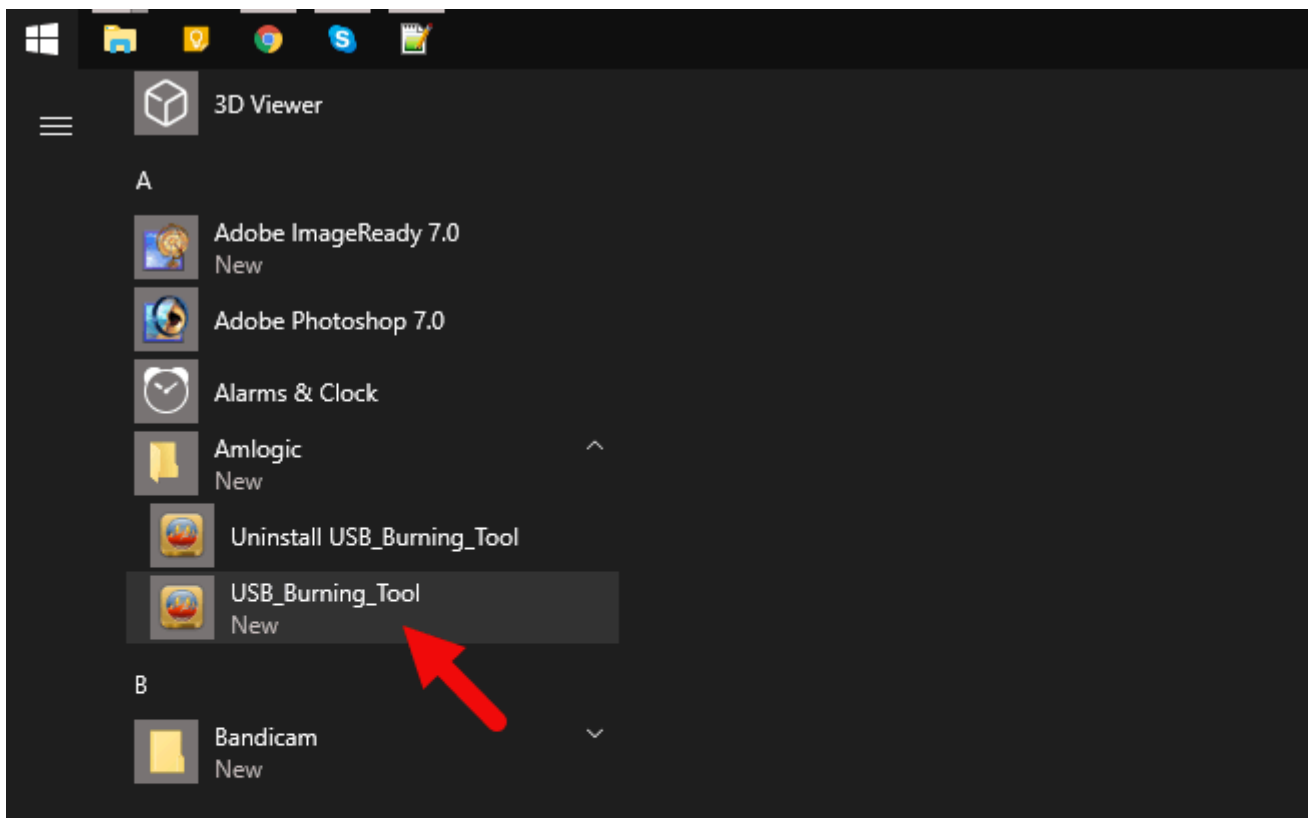## Install .img Firmware using Amlogic USB Burning Tool

1 Download and extract the Amlogic Burning Tool on your computer. After extracting the tool, you will be able to see the following files:
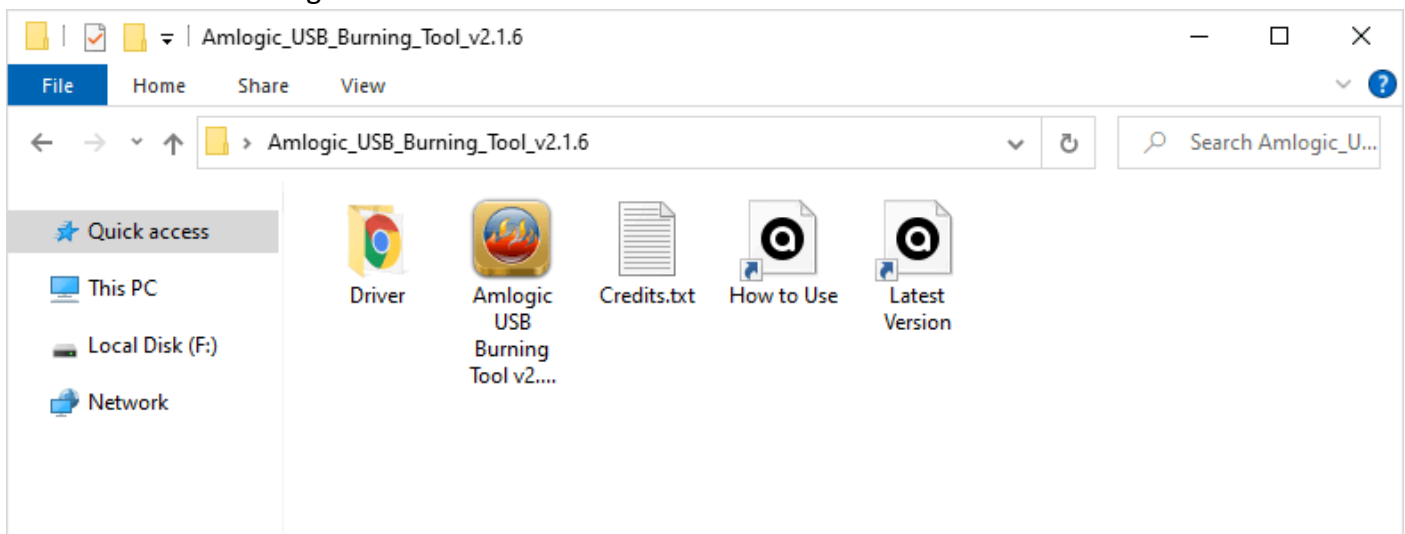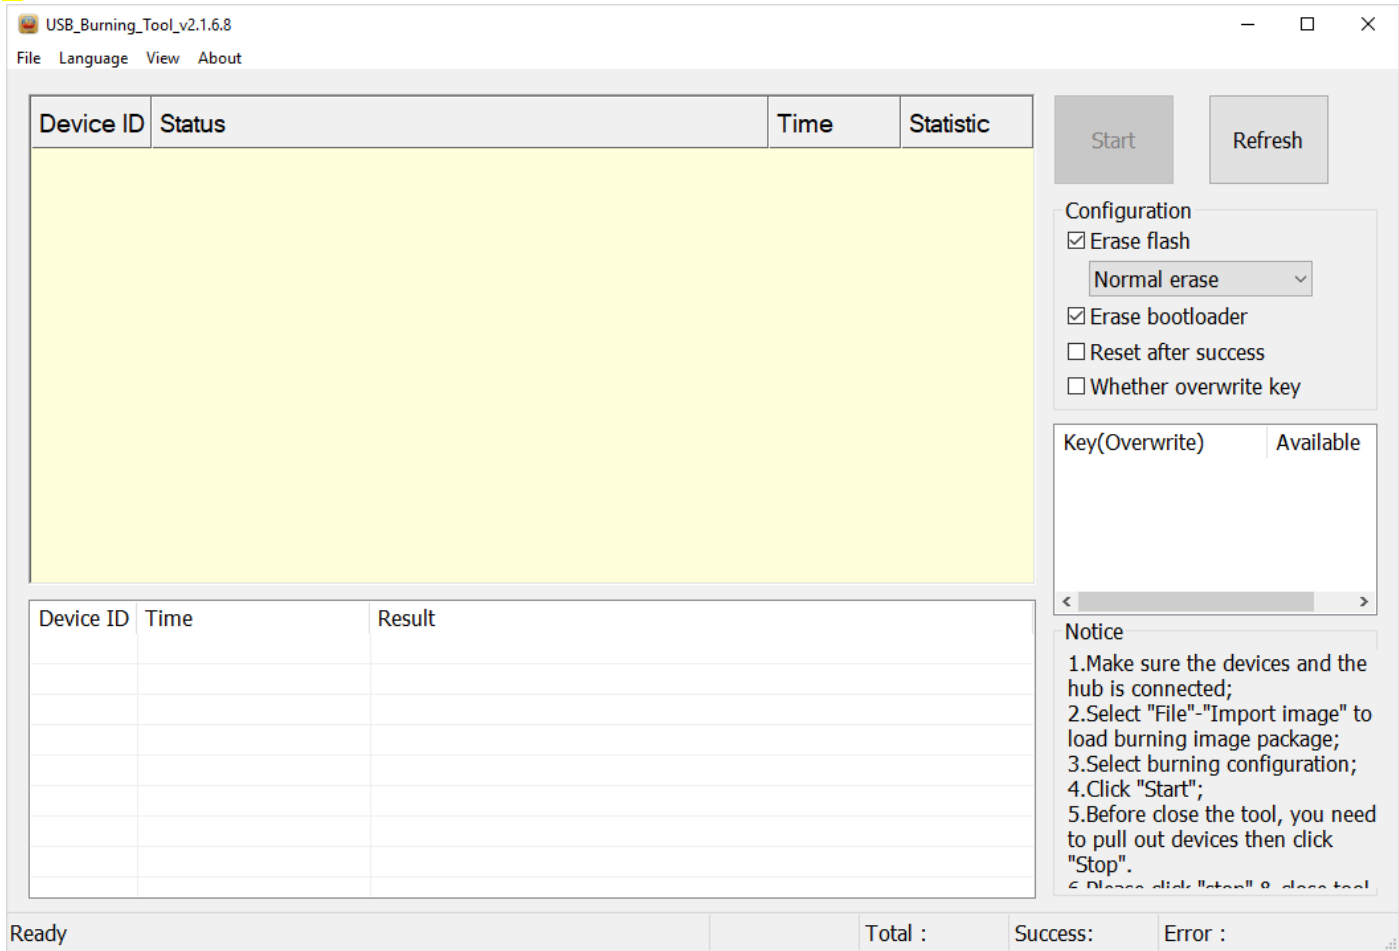

2 **Open the .exe file** to begin the installation process.
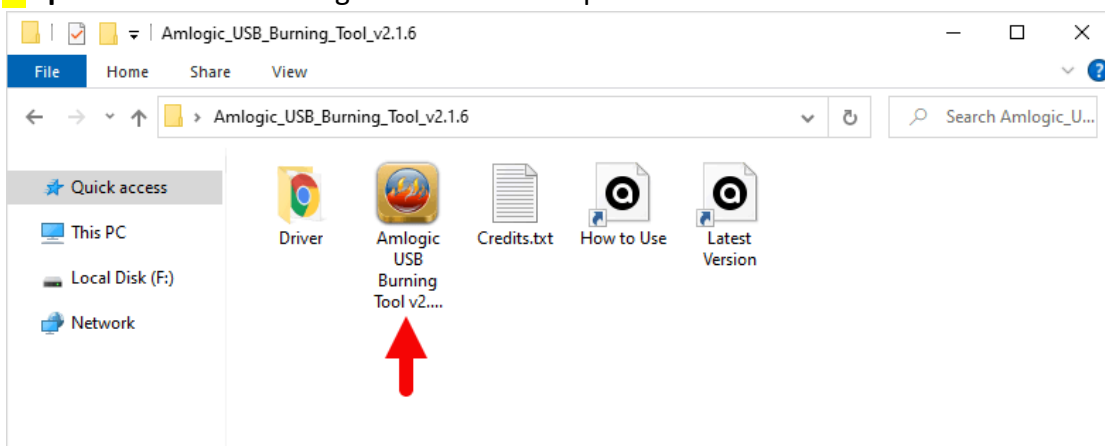
3 Once the installation is completed, **Launch the Amlogic Burning Tool** on your computer.

4 Once Amlogic Burning Tool is launched, you will be able to see the following screen:

5 Click on the **File** Menu and Select **Import Image**.
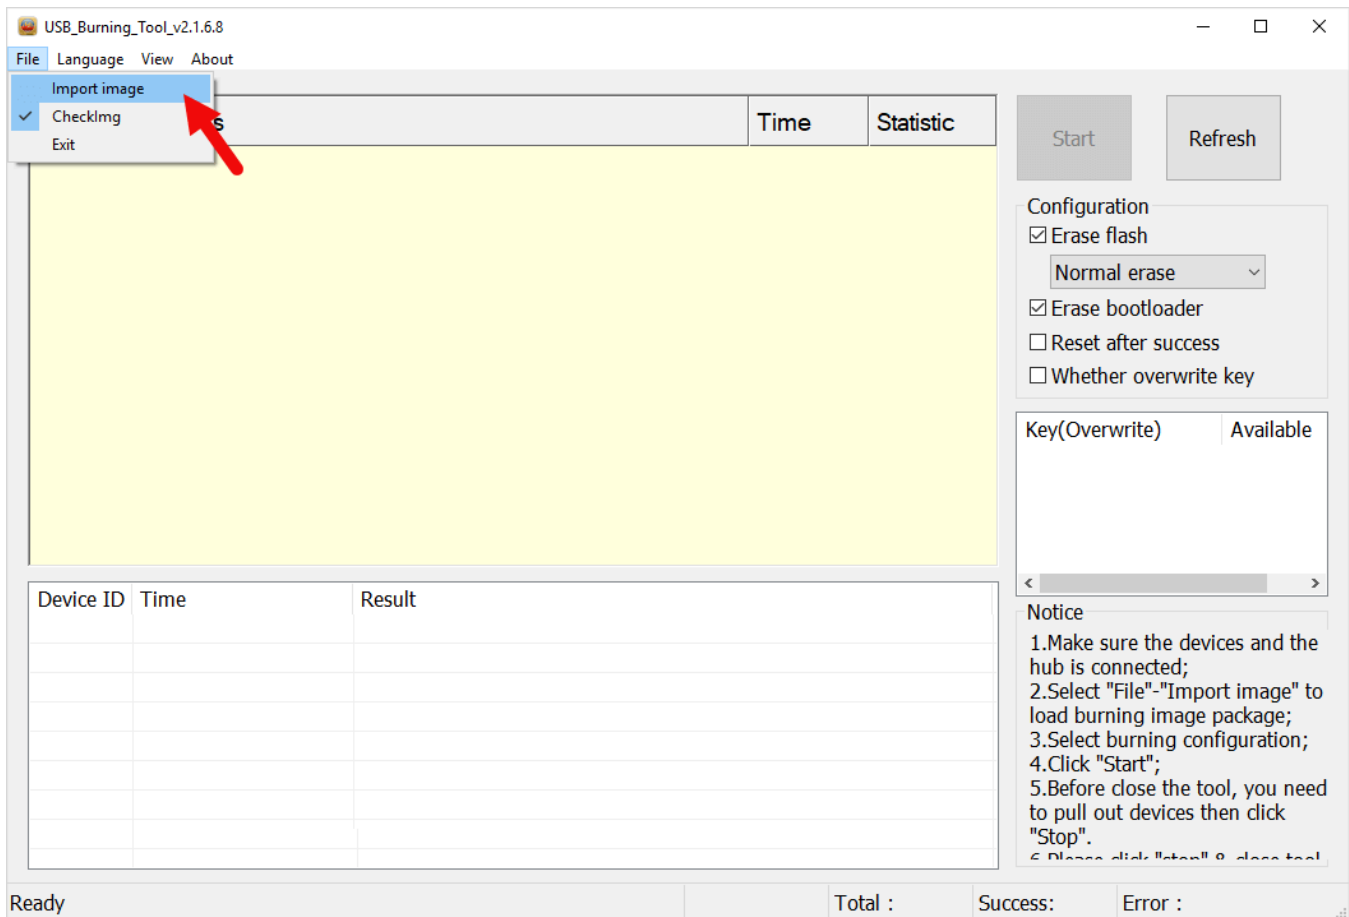
<mark>6</mark> **Locate** the Amlogic Firmware of your device (assuming you have already downloaded the firmware on the computer). And click on **Open** button to Load the firmware.

<mark>7</mark> Click on the **Start** Button.

USB_Burning_Tool_v2.1.6.8

File　Language　View　About

Device ID	Status	Time	Statistic

Start　　Refresh

Configuration
☑ Erase flash
　Normal erase
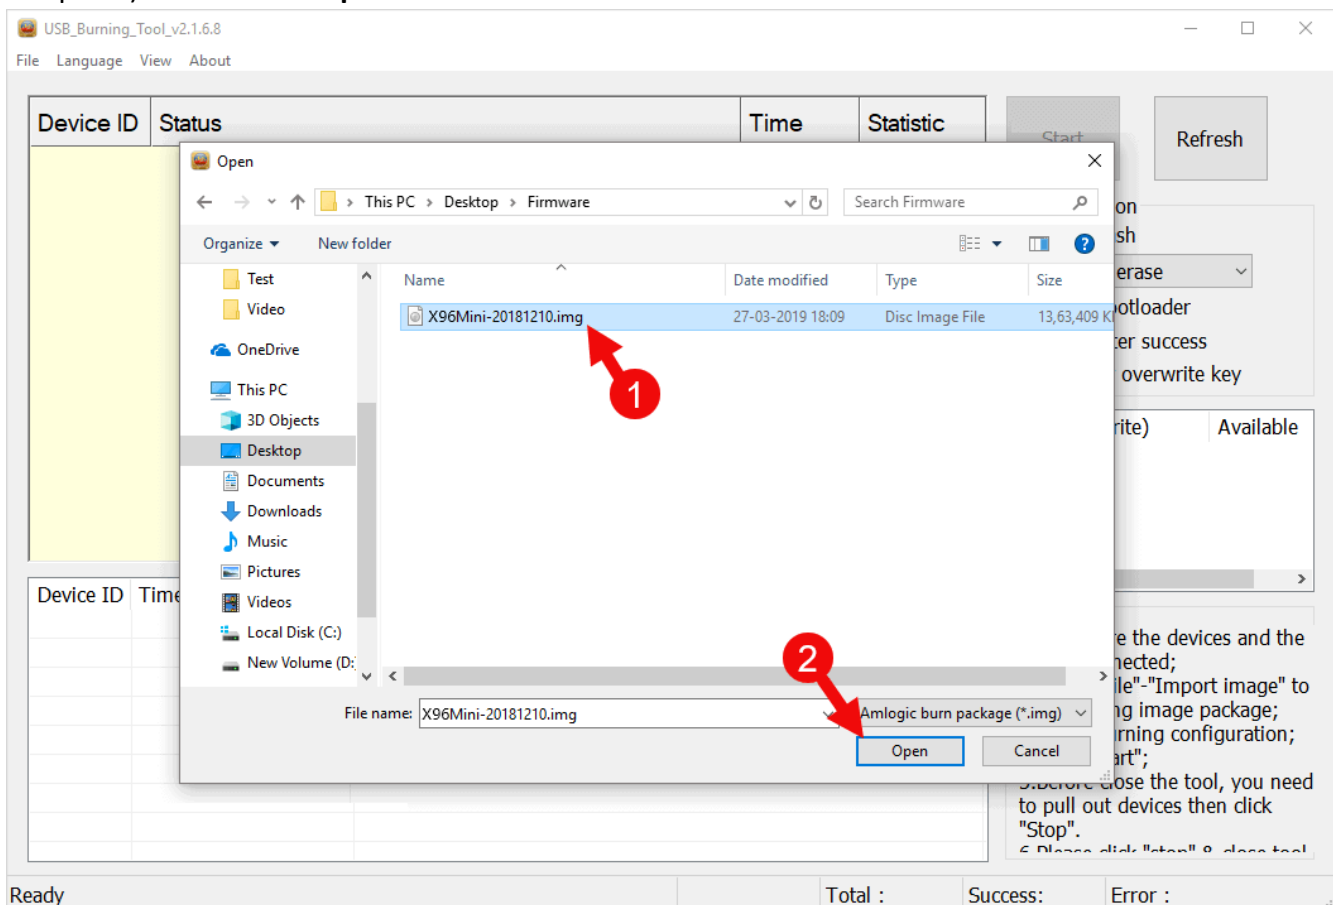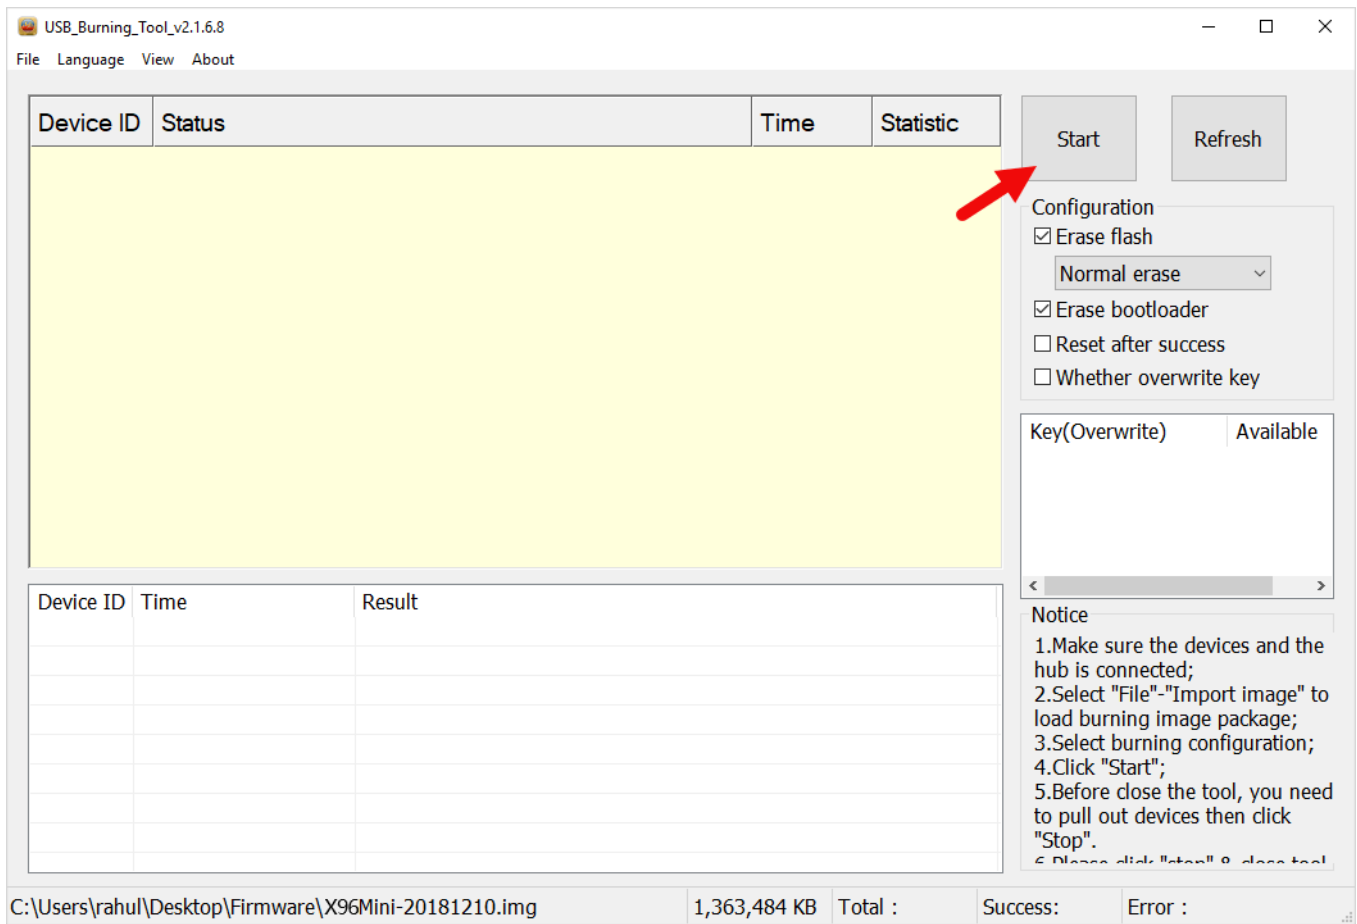☑ Erase bootloader
☐ Reset after success
☐ Whether overwrite key

Key(Overwrite)	Available

Device ID	Time	Result

Notice
1.Make sure the devices and the hub is connected;
2.Select "File"-"Import image" to load burning image package;
3.Select burning configuration;
4.Click "Start";
5.Before close the tool, you need to pull out devices then click "Stop".

C:\Users\rahul\Desktop\Firmware\X96Mini-20181210.img　　1,363,484 KB　Total :　　Success:　　Error :
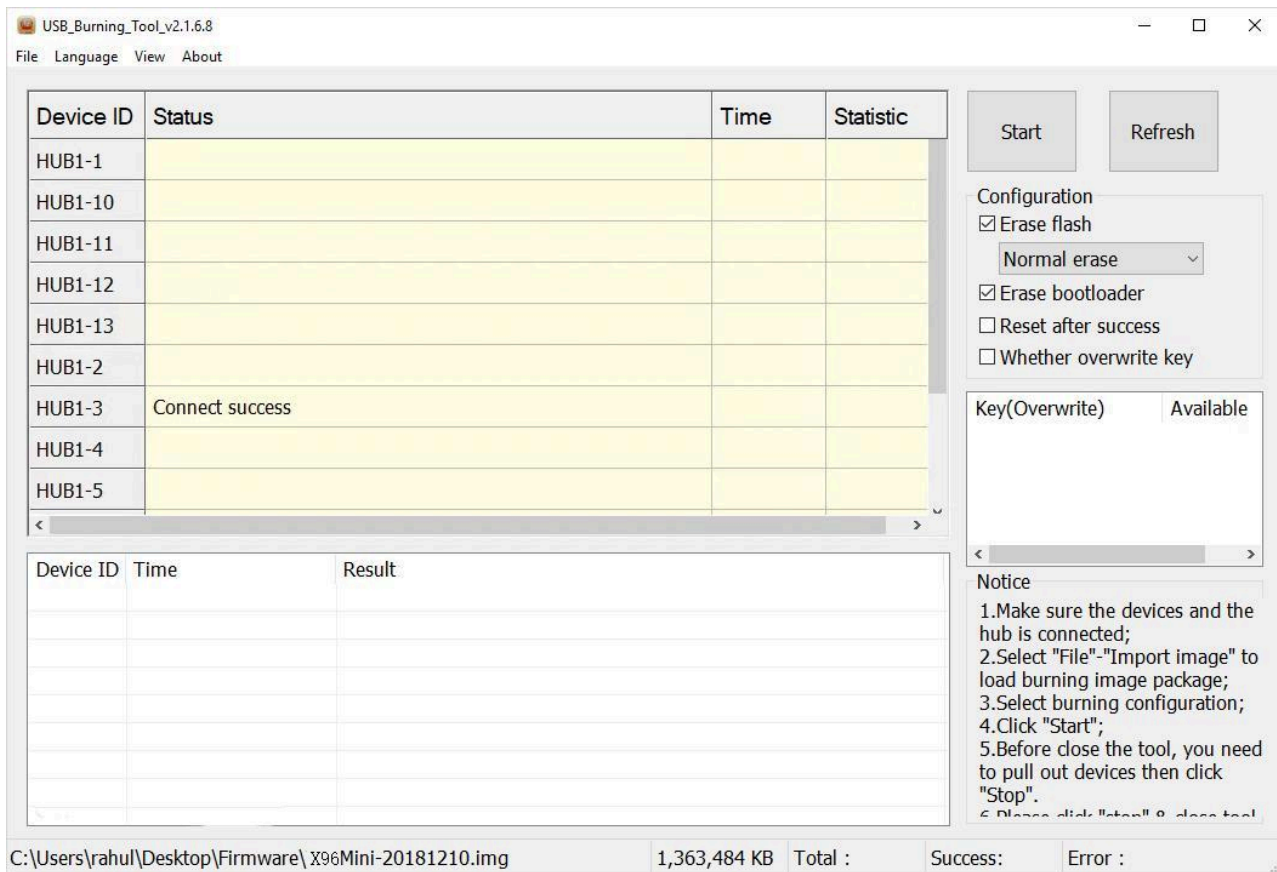
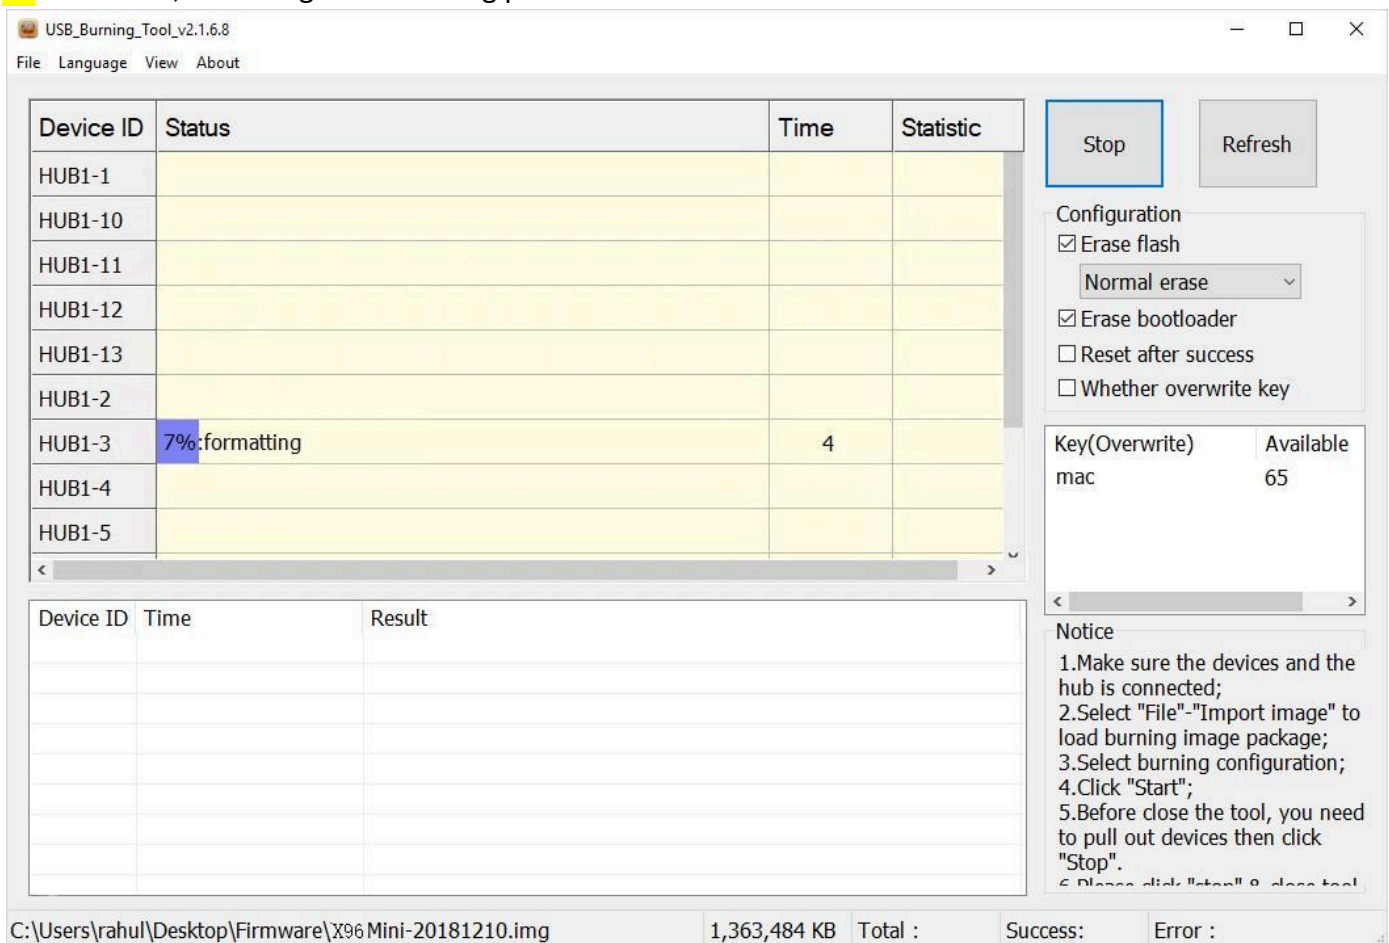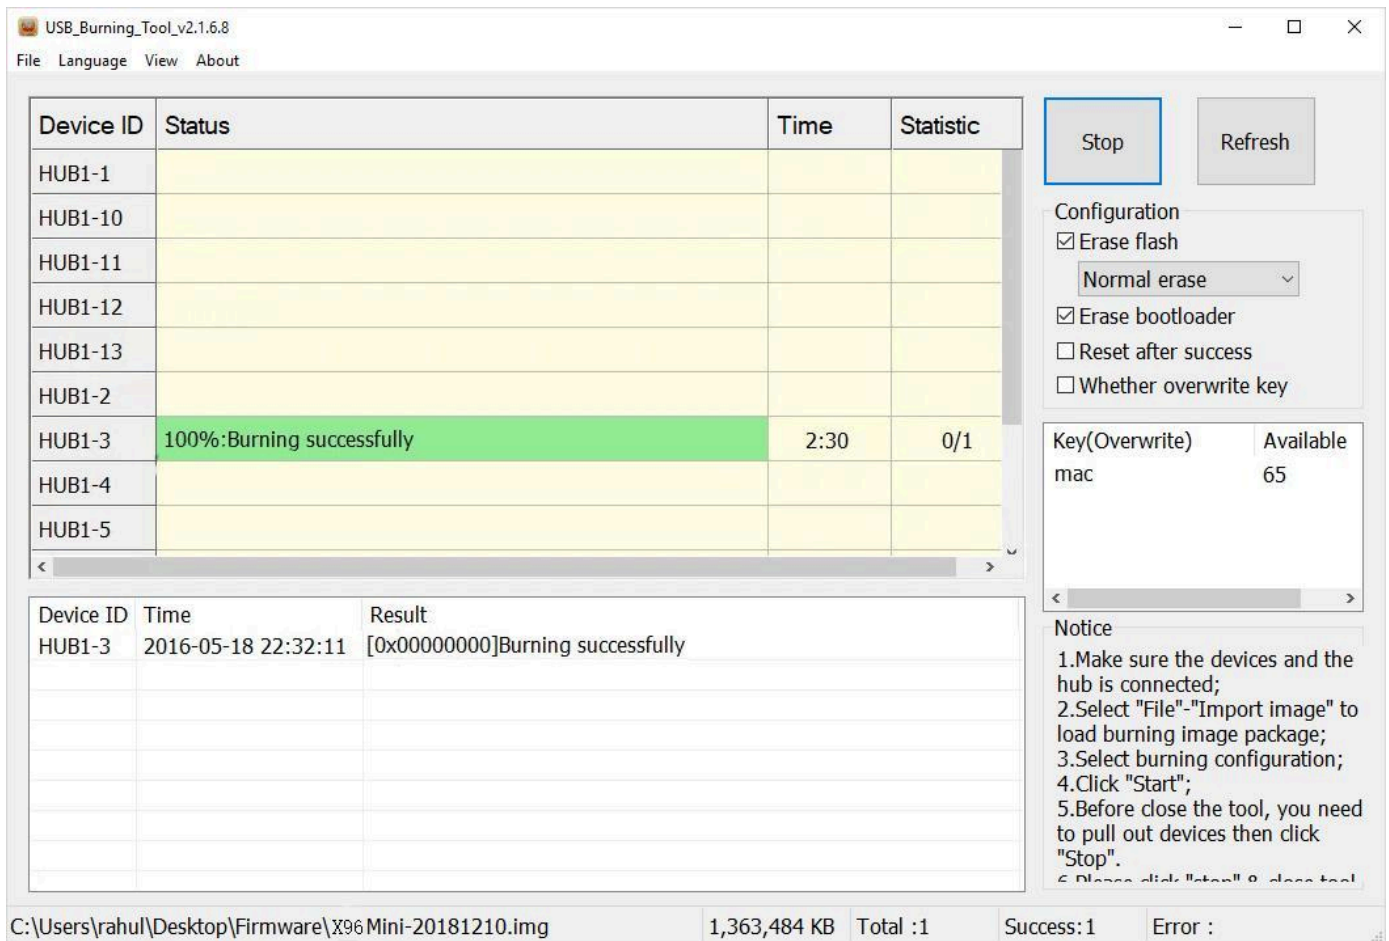8 **Connect** the Device to the computer using the **USB A to A male Cable**.

9 Once your device is connected to the computer, you will be able to see **Connect success** in the Status Area of the Tool.

Click **Start**, it will begin the flashing process.

Once Flashing is Completed Successfully, you will be able to see **100%:Burning Successfully** Message in the Status Area of the Tool.

Device ID	Status	Time	Statistic
HUB1-1			
HUB1-10			
HUB1-11			
HUB1-12			
HUB1-13			
HUB1-2			
HUB1-3	100%:Burning successfully	2:30	0/1
HUB1-4			
HUB1-5			

Stop   Refresh

Configuration
☑ Erase flash
   Normal erase
☑ Erase bootloader
☐ Reset after success
☐ Whether overwrite key

Key(Overwrite)	Available
mac	65

Notice
1.Make sure the devices and the hub is connected;
2.Select "File"-"Import image" to load burning image package;
3.Select burning configuration;
4.Click "Start";
5.Before close the tool, you need to pull out devices then click "Stop".

Device ID	Time	Result
HUB1-3	2016-05-18 22:32:11	[0x00000000]Burning successfully

C:\Users\rahul\Desktop\Firmware\X96Mini-20181210.img   1,363,484 KB   Total :1   Success:1   Error :

12 Close the Amlogic Burning Tool from your computer and disconnect the device.

Congratulations! You just learned to flash stock firmware on any Amlogic Powered Mobile device in the world.

For more details, please contact:

Jerry@amediatech.cn