


## ***OS support***

Bluetooth 4.0 and above

Tablet with Bluetooth V4.0 and above version

Smart phone with Bluetooth V4.0 and above version

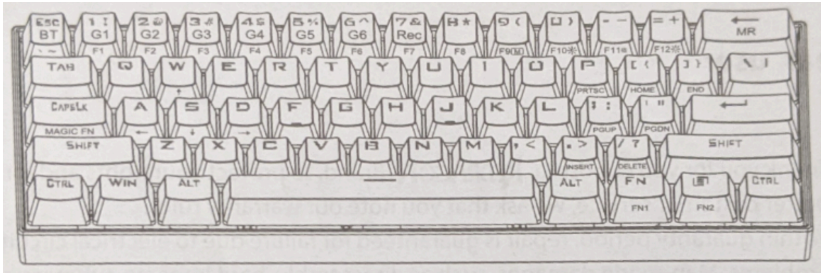

## ***Keyboard layout and button instruction***

A. Power Switch ON/OFF

B. Bluetooth channel B1/B2/B3

C. Bluetooth indicator

1. Paired with B1 on Red, paired with B2 on Blue paired with B3 on Green.

2. Twinkle on Red while it is pairing.

D. Battery indicator

1. Twinkle on Red for low power indication.

2. Twinkle on Green for charging. 3. Light on Green while charging completed.

## ***Wired connecting***

Plug type C to USB cable with keyboard and PC, put the power switch to OFF, keyboard is plug and play, no need driver.

## ***Bluetooth connecting***

A. connect keyboard with computer 1. Turn keyboard power switch to ON.

2. Select B1/B2/B3 from the bluetooth channel switch, For example put the switch on B1, the bluetooth indicator twinkle ready for pairing.

3. Turn on PC bluetooth, search bluetooth keyboard B1 from the available list.

4. Pair with B1.

B. Connect keyboard with tablet 5. Turn keyboard power switch to ON.

6. Select B1/B2/B3 from the bluetooth channel switch, For example put the switch on B2, the bluetooth indicator twinkle get ready for pairing.

7. Turn on tablet 8. Pair with B2.

bluetooth search bluetooth keyboard from the available list

C. Connect keyboard with smart phone

9. Turn keyboard power switch to ON.

10. Select B1/B2/B3 from the bluetooth channel switch, For example put the switch on B3, the bluetooth indicator twinkle get ready for pairing.

11. Turn on smart phone bluetooth, search bluetooth keyboard from the available list.

12. Pair with B3.

## ***How to charge keyboard***

Plug the type C cable to USB between keyboard and PC, battery indicator will be twinkle in Green while charging, the indicator stop twinkle and turn ON when charging complete,charging time is around 10 hours.

## ***Key Function Introduction***

FN1 key work with other keys

1. FN1+<ESC>=

2. FN1+<1-0>= F1~F10

3. FN1+<- >=F11

4. FN1+<+=>=F12

5. FN1+<A>=

6. FN1+<S>=1

7. FN1+<D>=

8. FN1+<W>=1

9. FN1+<P>=PRTSC

10. FN1+<[>=HOME

11. FN1+<]]>=END

12. FN1+<:=PGUP

13. FN1+<">=PGDN

14. FN1+>=INSERT

15. FN1+</?>=DELETE

FN2 key work with other keys

1. FN2+"9"=9 Backlighting modes switch, including The trial of Light, Breathing

Normally on, Go with the wave, Clouds fly, Winding Path, Flowers blooming Snow

winter jasmine, Swift action, Both ways, Surmount, Fast and the furious.

2. FN2+ "0": Turn off backlighting.

3. FN2+ "-", Brightness - total 5 levels.

4. FN2+: "+": Brightness+, total 5 levels.

5. FN1+WIN: Lock Windows key, press it again to unlock,

6. FN1+ESC: Press and hold for 3 seconds, Back to factory setting.

7. FN2+ESC: Press and hold for 3 seconds, broadcast function.

## ***Special keys function***

CAPS LOCK: In wireless mode, Press it for Caps function and keys light on long press CAPS key will be switch to Magic FN key function.

## ***Macro recording for gaming***

1. Press FN2+7(REC), CAPS key twinkle slowly to indicate keyboard is ready for recording. 2. Press FN2+1-6 (any key from 1-6), CAPS key twinkle quickly, press the desired key to record, max to 64 keys (Fn1, APP keys are not available for recording) or 30 seconds, press REC to save and quit, preset macro keys will be light on Green.

3. Delete all macro: press and hold FN2+8 for 5 seconds to delete all macro. Delete marco: Press FN2+7, then press the desired macro key, press FN2+7 again to save and quit.

4. Play macro: press the macro key to play recording(The preset macro keys on Green).

## ***Light recording for different gaming mode***

Press FN2+backspace to light recording mode, then press it again to get start to recording while CAPS key twinkle, press the desired key for several time and set the light color, repeat it to other desired keys, press FN2+backspace to save and quit(CAPS key stop twinkle).

## **FAQ**

1. If the keyboard doesn't respond, please check if the keyboards USB cable is correctly inserted into the corresponding USB port on the computer, or try another USB port on the computer.

2. If you spill liquid on the keyboard, please remove keyboards USB cable from the computer immediately. Wipe up excess liquid and put the keyboard in a warm place (for instance, under a lamp) to let the keyboard dry naturally before using again.