

- Insert SD card into camera
- Log into camera via browser
- Go to Configurations >> Local Storage >> SD card management.
- Under “SD card Format”, select ‘Ext4’ and click ‘Format’.

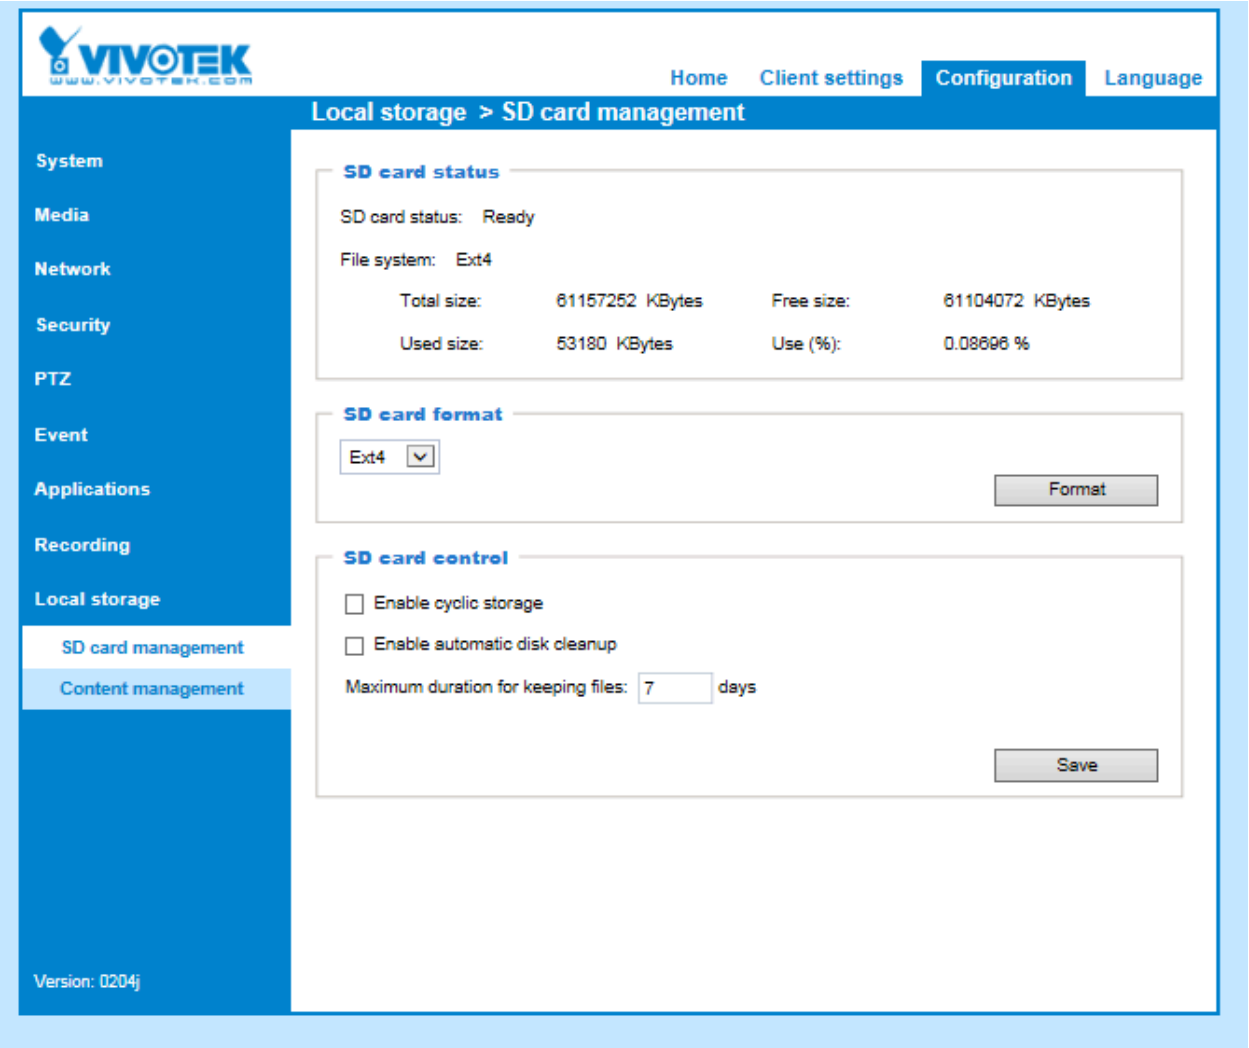


- Go to Application >> Motion Detection. Under the ‘Normal Light Mode’ tab click the ‘New’ button. Click four different points into the camera’s field of view to set the motion detection field.
- Make sure you tick the ‘Enable motion detection’.
- Click ‘Save’.

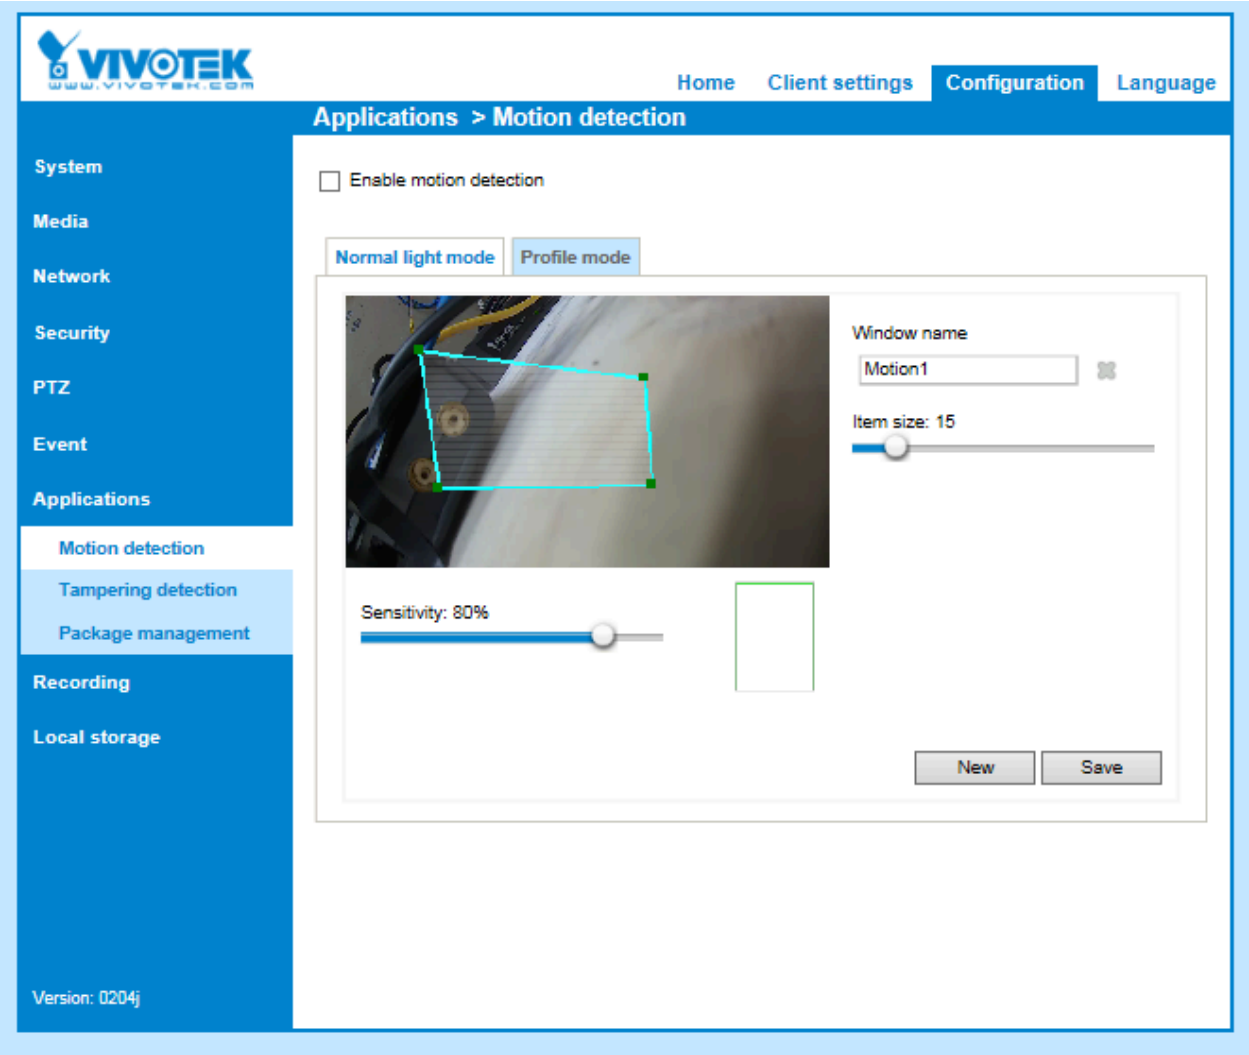


- Go to Event >> Event Settings. Under ‘Event’ click ‘Add’.
- Click on ‘1 Schedule’. Select the Schedule you want.

- Click ‘2 Trigger’. Select ‘Video Motion Detection’ and tick the ‘Motion 1’ tick box.

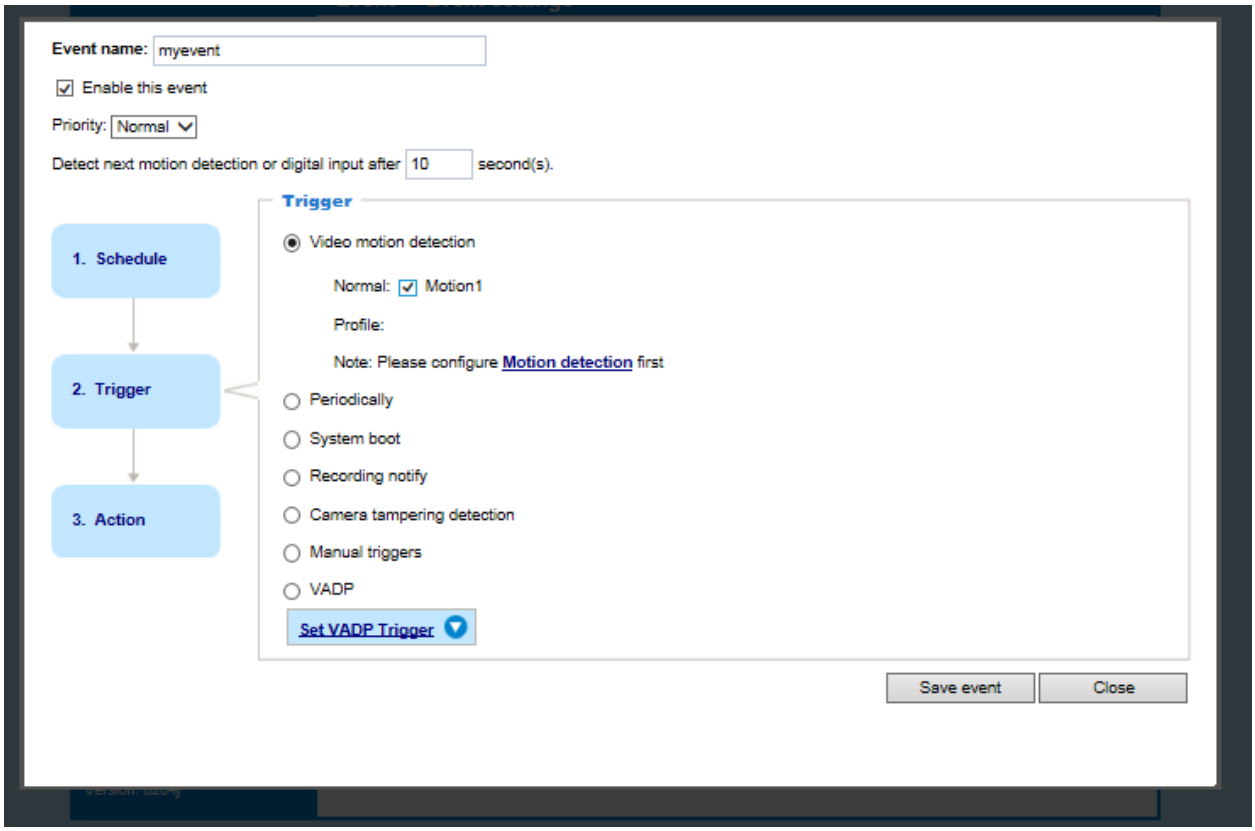

- Click ‘3 Action’. Click ‘Add media’.
    - Select Video Clip.
    - Type in a ‘Media name’.
    - In the Video Clip menu customise it the way you want.
    - Click ‘Save media’ and then ‘close’.

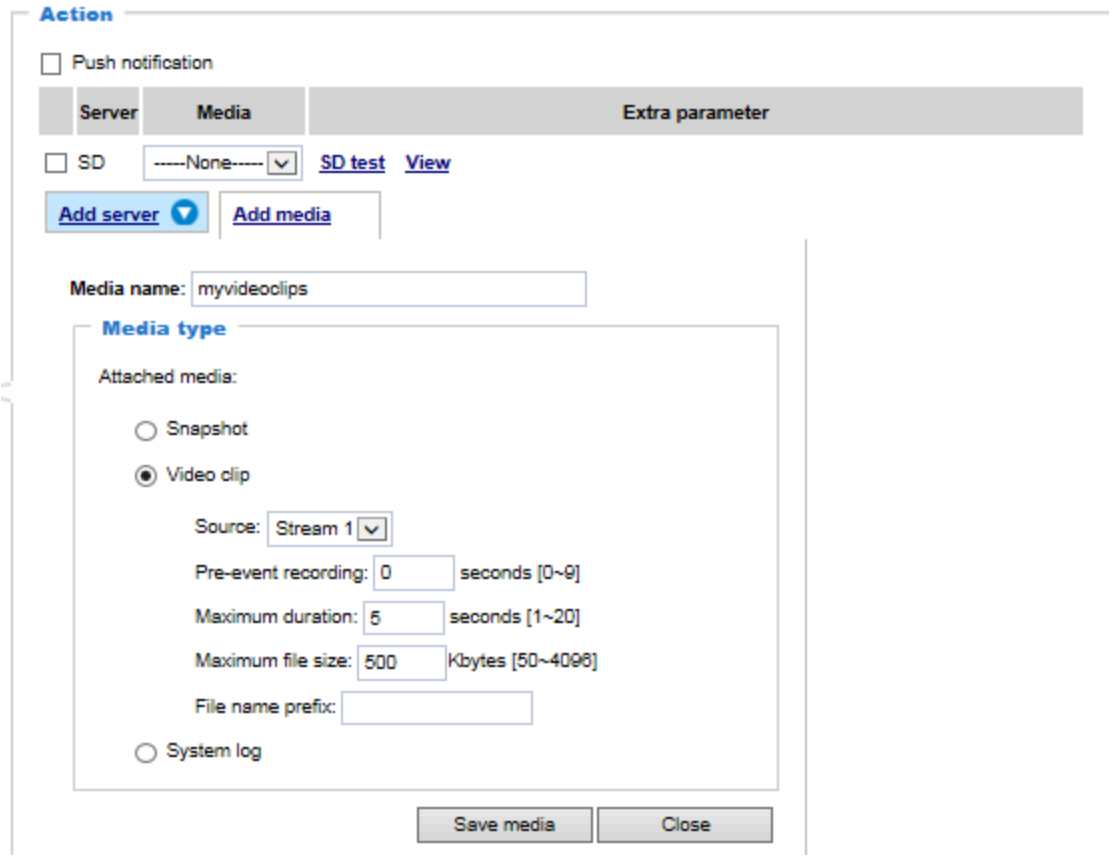

- Scroll to the top of the mini-window and type in an ‘Event name’ and tick the ‘Enable this event’ tickbox.
- Scroll to the bottom and click ‘Save Event’ and then ‘Close’.
- Under Event >> Event settings you’ll see your Event and your Media options.