

Configure SCIM in Chargebee

This guide provides the steps required to how to obtain or configure the SCIM Provisioning on Chargebee, and includes the following topics:

- Pre requisite
- Features
- Configuration Steps
- Chargebee's Group Name Format

Pre requisite

1. The SAML needs to be enabled before configuring provisioning for Chargebee. Here are the instructions for doing it: <https://www.chargebee.com/docs/saml.html#login-options>.
2. After enabling SAML, users should reach out to Chargebee (support@chargebee.com) to enable User Provisioning on their site.

Features


The following Provisioning features are supported:

1. Push New Users
2. Push Profile Updates
3. Push User Deactivation
4. Reactivate Users
5. Push Groups
6. Unlink Groups
7. Push, update user groups

Note: Import of Users or Groups from Chargebee to OKTA is not supported.

Configuration Steps

1. Obtain the API Token value required for configuring Provisioning in Chargebee:
 - a. Login to [https://\[your-subdomain\].chargebee.com](https://[your-subdomain].chargebee.com) via SAML
 - b. Navigate to **Settings > Team Members > User Identity Management**, then click **Get Started**:

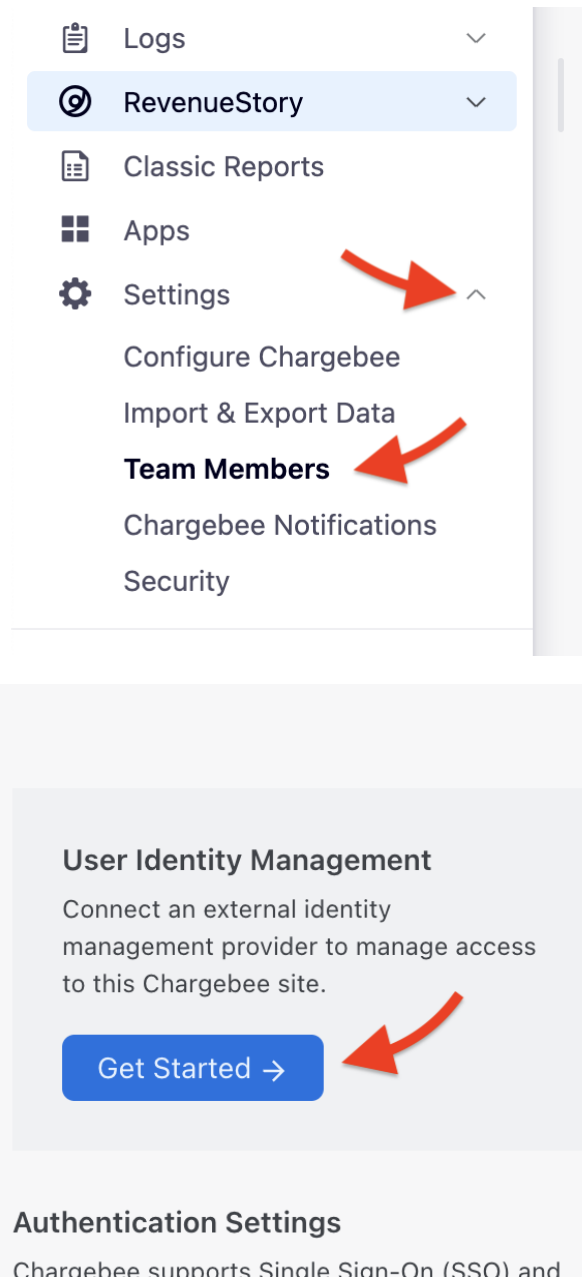

- c. Follow the steps below:
 - Select **SCIM** and click Next.

- Select **OKTA** and **Bearer** as authentication type and click Next.
- **Chargebee Credentials:** Use the values to add **SCIM connection** at **Provisioning** tab of Chargebee Okta integration.

User Identity Management

Provider
OKTA

Next

Dismiss

Connect OKTA to Chargebee


1. Sign into OKTA.
2. Add Chargebee as an application.
3. Enter your **Chargebee Site URL** and **API Key**.

[Learn more about adding an app to OKTA](#)

Chargebee Credentials

Chargebee Site URL

 chargebee.com/scim/v2

Bearer Token


i The Chargebee credentials have been uniquely generated for connecting Chargebee to OKTA. Do not close this window until you've successfully added Chargebee as an app to OKTA.

2. Configure Your Provisioning Settings in the Chargebee Okta Application as Follows:
 - a. Go to the **Provisioning** tab and click **Configure API Integration**.
 - b. Check the **Enable API Integration** box and Enter your Chargebee API Token.

- c. (Optional) Test your credentials by clicking Test API Credentials.
- d. Click Save to apply the changes.

Chargebee's Group name Format

Chargebee requires the okta group name to be in the following format:

1. **CB/<domain>/ROLE/<role_name>**

where CB is a standard prefix and the following characters will be the domain name.

ROLE is the standard prefix which tells us the following characters are the role name.

For example, ADMIN, ANALYST, etc.

2. For the Multi Business Entity context, treat the business entity as another dimension of a group. For example: CB/<domain>/BE/<entity_name>