


Beat DJ is rebranding to Auwen - I'll update these docs soon

Auwen Mac 4 Channel Audio Setup

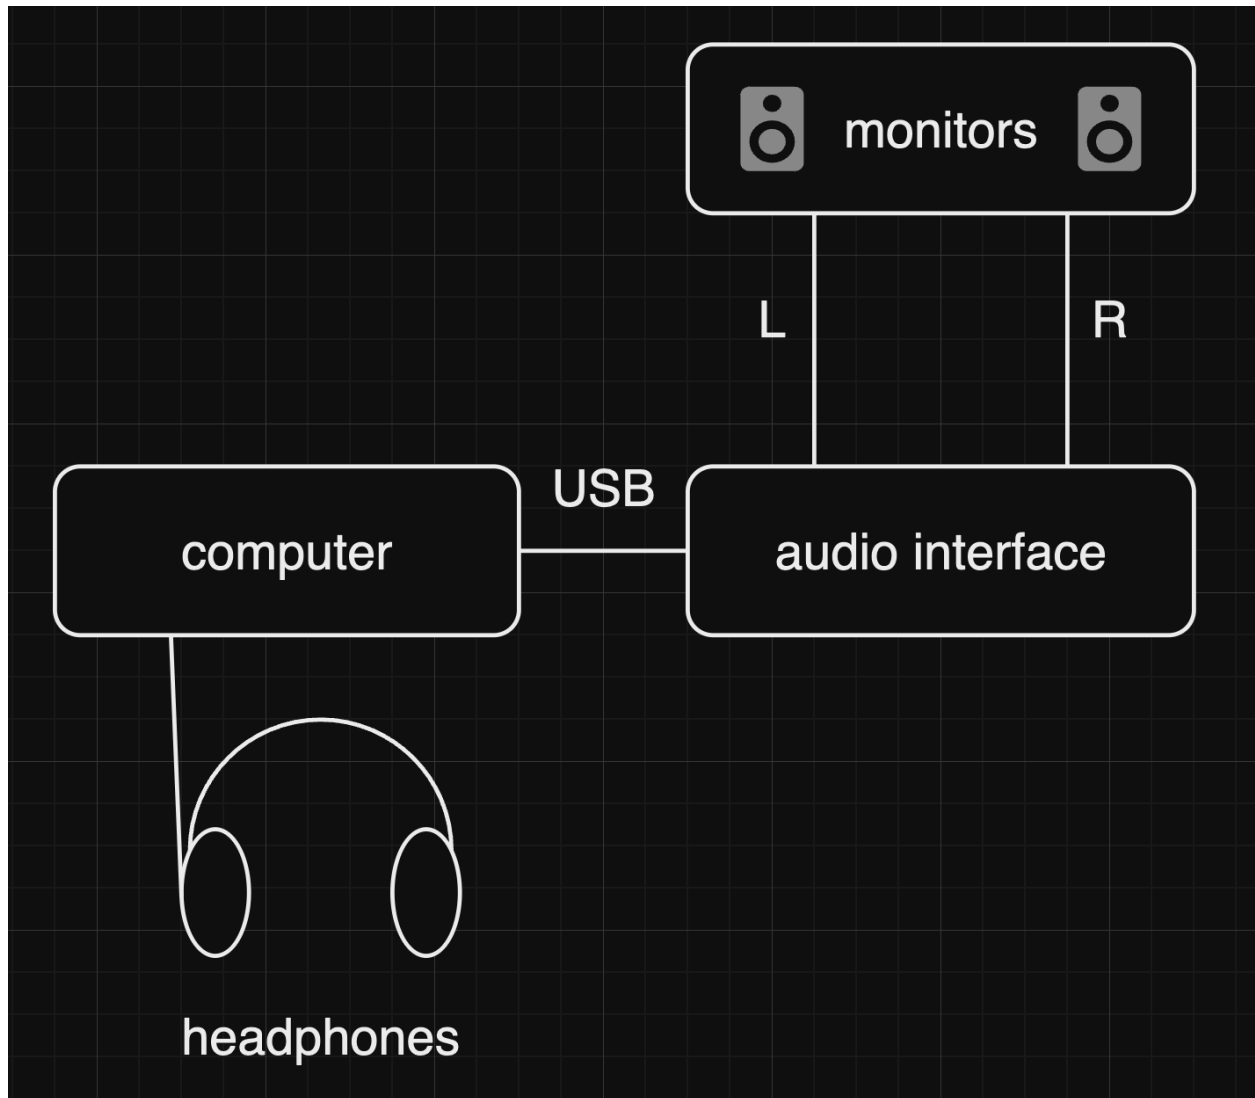

There are 6 steps to set this up


STEP ZERO: Make sure to install the driver for your audio interface if you haven't already. If it already works in other DAWs then this step is done.

STEP ONE: Plug in headphones to mac

STEP TWO: Plug in audio interface to mac via usb


STEP THREE: Open audio midi setup program by clicking command+spacebar and typing "midi" then hit enter

STEP FOUR: Create a new AGGREGATED device called DJ with headphones on channels 1 & 2 and your audio interface on channels 3 & 4

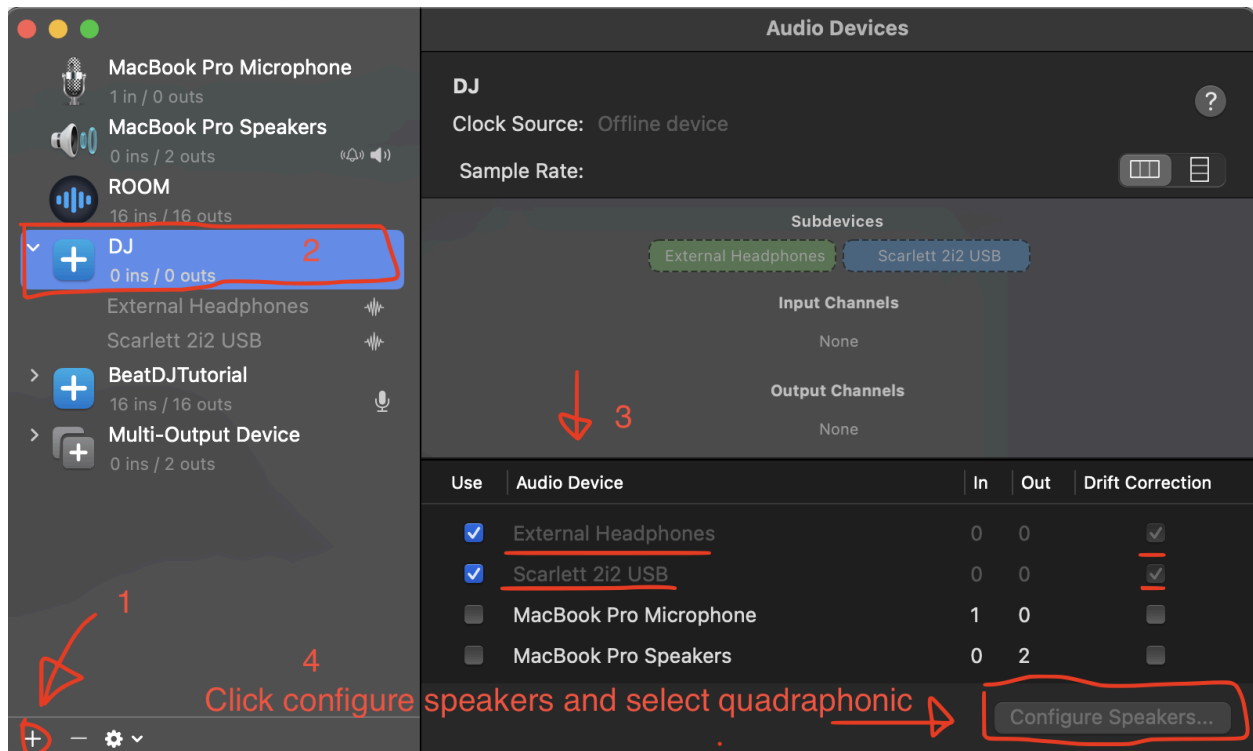

Also I recommend setting your Sample Rate shown above to the same sample rate Auwen uses when connected to your default output device like speakers or headphones. You can check the infobar on the bottom of Auwen. It's probably 48000 or 44100. This will avoid Auwen having to do sample rate conversions between your saved sounds and your live performances.

STEP FIVE: Select your aggregated device in sound settings

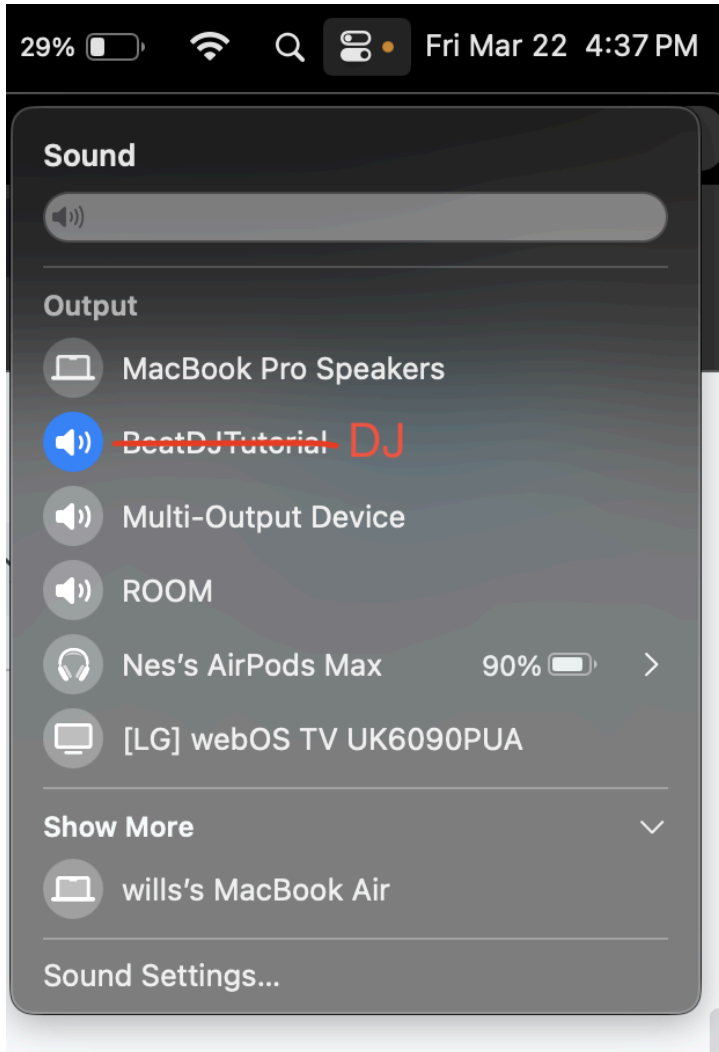

STEP SIX: Open or restart Auwen. There is an hourglass icon in Auwen. The bottom left corner is the left headphone channel, the bottom right is the right headphone channel. The top corners represent the speakers' left and right channels. If that is backwards then redo your aggregated sound device in the reverse way or run ``invertOutput`` to invert it virtually which is also fine.

Use the ``mv`` command to move sounds to the speakers ``mv 1`` and use the ``mv -1`` command to send them back to the headphones. ``mv 0`` is the staging area.