

# **IK230 3G GPS Tracker**

## **User Manual V1.0**



### **Preface**

Congratulations on choosing the icar GPS IK230 3G Asset GPS tracker. This manual shows how to easily program and setup the tracker for best results. Make sure to read this manual carefully before using this product, so as to avoid delays or confusion with it's operation. Please note that specifications and instructions are subject to change without notice to facilitate product improvement. Updates and changes will be integrated into the latest release. The manufacturer assumes no responsibility for any errors or omissions in outdated documents.



## **1. Overview**

IK230 is a 3G Asset GPS tracker.

## **2. Features**

- Real-time tracking
- GPS+WiFi Positioning
- History record check
- Geo-Fence alarm
- Low battery alarm
- Power saving mode
- PC & Mobile App tracking
- Mini Hidden
- IP65 Water resistant
- Remove Alarm
- One way communication

## **3. Applications**

- Luggage tracking
- Container tracking
- Logistics tracking

## **4. Specifications**

Item	Specifications
Dimension	90*49*26mm
Weight	140g
Charger	DC 5V/1A
Backup battery	3.7V 5000mAh
Power consumption	40mA standby current
Working temperature	-20°C to 65°C
Item	Specifications
Cellular Bands	<b>GSM:</b> 850/900/1800/1900Mhz
Positioning	GPS, AGPS, LBS

Tracking Sensitivity	-162 dBm
Sensor	Accelerometer
LED	RED/GREEN/BLUE
SIM Card interface	Micro SIM
Waterproof	IP67

## 5. IK230 interface



## 6. In the box

- 1\* IK230 GPS Tracker
- 1\* Quick Start Guide
- 1\* Screw Driver
- 1\* Charge Cable

## 7. Installation

### 7.1 SIM Card installation

- Get ready a **Micro Sim Card** that support **GSM&GPRS** with 30MB data per month
- Open the top housing
- Insert **Sim card** to sim card slot correctly
- Devices would turn on autoly (green led will blinking).
- After that the device will be ready.

### 7.2 LED Indications

	Flash	Fix	Off
Green Light	GSM/GPRS conversation start	No GPRS signal	Power off or in sleep mode
Blue Light	GPS location successful	No GPRS signal	Power off or in sleep mode

Red Light		charging	Full battery or charged full
-----------	--	----------	------------------------------

## 8. SMS Commands List

Function	Command Format	Reply	for example
APN	apn+123456+space+content	apn ok	apn123456 cmnet
	apnuser+123456+space+content	apnuser ok	
	apnpasswd+123456+space+content	apnpasswd ok	
admin number	admin123456+space+admin phone number	admin ok	admin123456 186*****
Domain	SZCS,123456,DOMAIN=a.icargps.net:7700	Domain ok	SZCS,123456,DOMAIN=a.icargps.net:7700
upload frequency	Upload123456 time(unit/s)	OK	Upload123456 10
Monitor	Monitor123456	monitor OK	Monitor123456
Position	where	Google map Link	where
Restart Device	RST	Device would restart immediately	RST
Check	Param1	details of device	Param1
Status	Status	Status of device	Status
Back to factory	Format	OK	Format

## 9. App & PC Tracking platform



### 9.1 App install & Login

- Search “**ICAR GPS**” in Google Play or iOS store(or scan the following QR code) to



download the Mobile APP;

- Choose the "Login by Device No.,"
- Input your device's ID number and password(default is 123456) to login.

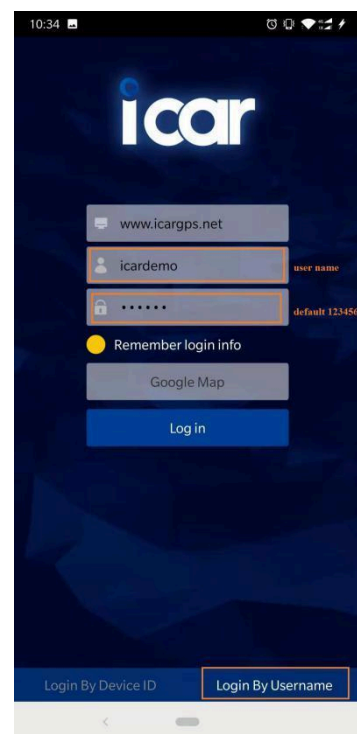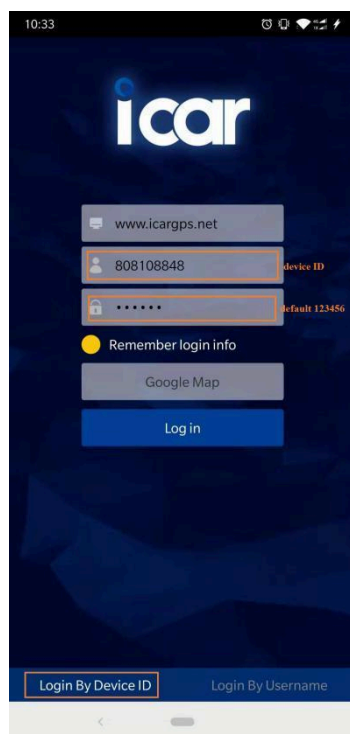

- Choose the "Login by User name.,"
- Input your user name and password(default is 123456) to login.

## 9.2 PC login

- Web: [www.icargps.net](http://www.icargps.net), Choose “ID No.”
- Input **your device's ID number** and password(default is 123456) to log in

The screenshot shows the iCar login interface. On the left, there are QR codes for downloading the ICAR GPS APP from Google Play and the App Store. The main login area has two tabs: 'ID No.' (selected) and 'Account'. Under the 'ID No.' tab, there is a 'device ID' field containing '808108848' and a password field containing 'default 123456'. Below these fields are radio buttons for 'Remember' and 'Demo'. A 'Login' button is positioned below the radio buttons. At the bottom, there is a 'Select language' section with various flags.

- Web: [www.icargps.net](http://www.icargps.net), Choose “Account”
- Input **user name** and password(default is 123456) to log in

The screenshot shows the iCar login interface with the 'Account' tab selected. The 'device ID' field now contains 'icardemo' and the 'user name' field is empty. The password field still contains 'default 123456'. The 'Remember' and 'Demo' radio buttons are present, along with the 'Login' button and the 'Select language' section at the bottom.

## **10. FAQ**

- **Q: Start up Fail?**
- A: Check the device power on or not.
  
- **Q: The device can not obtain location information?**
- A: Place the unit at the open area to test.
  
- **Q: How to choose SIM card?**
- A: the SIM card must support GSM&GPRS, and ensure that the card has enough currency and credit.
  
- **Q: How to use in the foreign countries?**
- A: please set the APN before use, please edit the text “APN123456 CMNET “ and send it to the SIM card of the device, CMNET is Chinese operator’s APN, Replace the corresponding APN when use in other countries, APN details, please consult your local SIM card carrier.