


# Eversolo DAC-Z10 Update Tutorial

## I. Preparation

### 1. Prepare Storage Media


- It is recommended to use the USB flash drive included with the device. Ensure the drive is FAT32 formatted.
- If your USB drive is not FAT32 formatted, connect it to a computer and reformat it to FAT32.
- For optimal compatibility, format the USB drive by connecting it directly to a USB port on the rear of your computer's motherboard or to an Eversolo streamer's USB port.

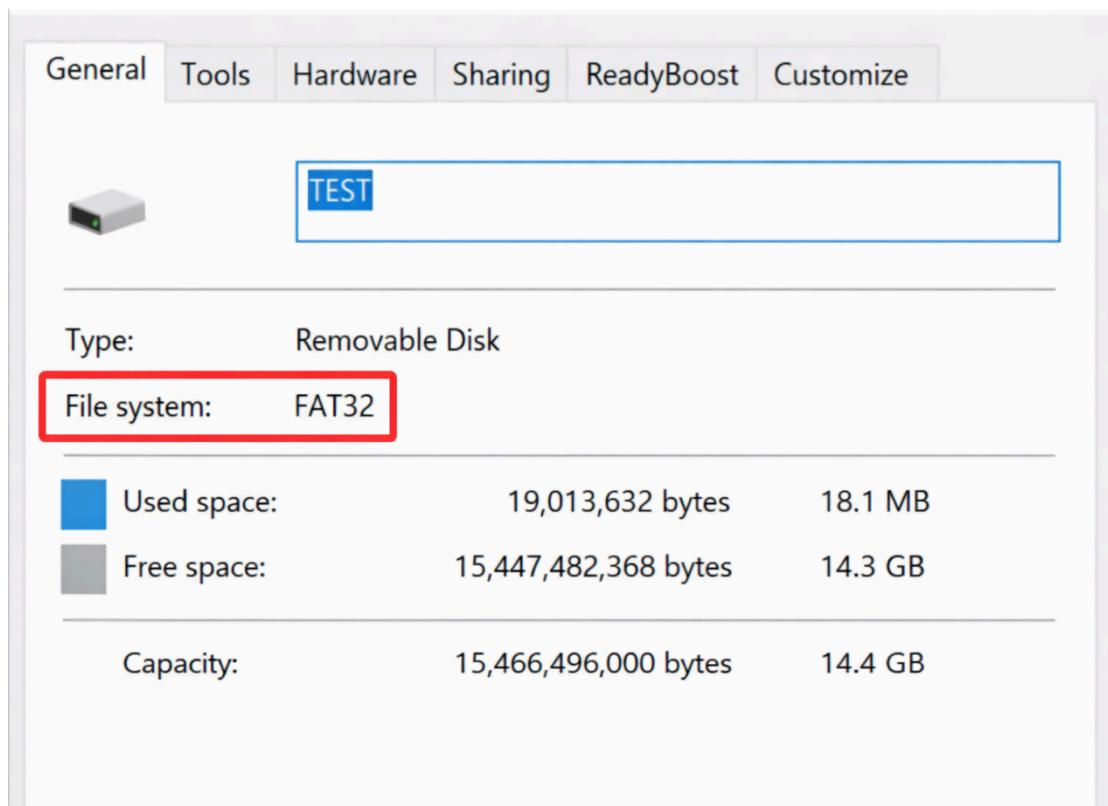

### 2. Obtain the Firmware Update Package

- Download the latest firmware update package designed for the Eversolo DAC-Z10.

- **Directly** copy the update file (with a **.PKG** extension) to the root directory of the USB drive. **Do not place it inside any folders.**

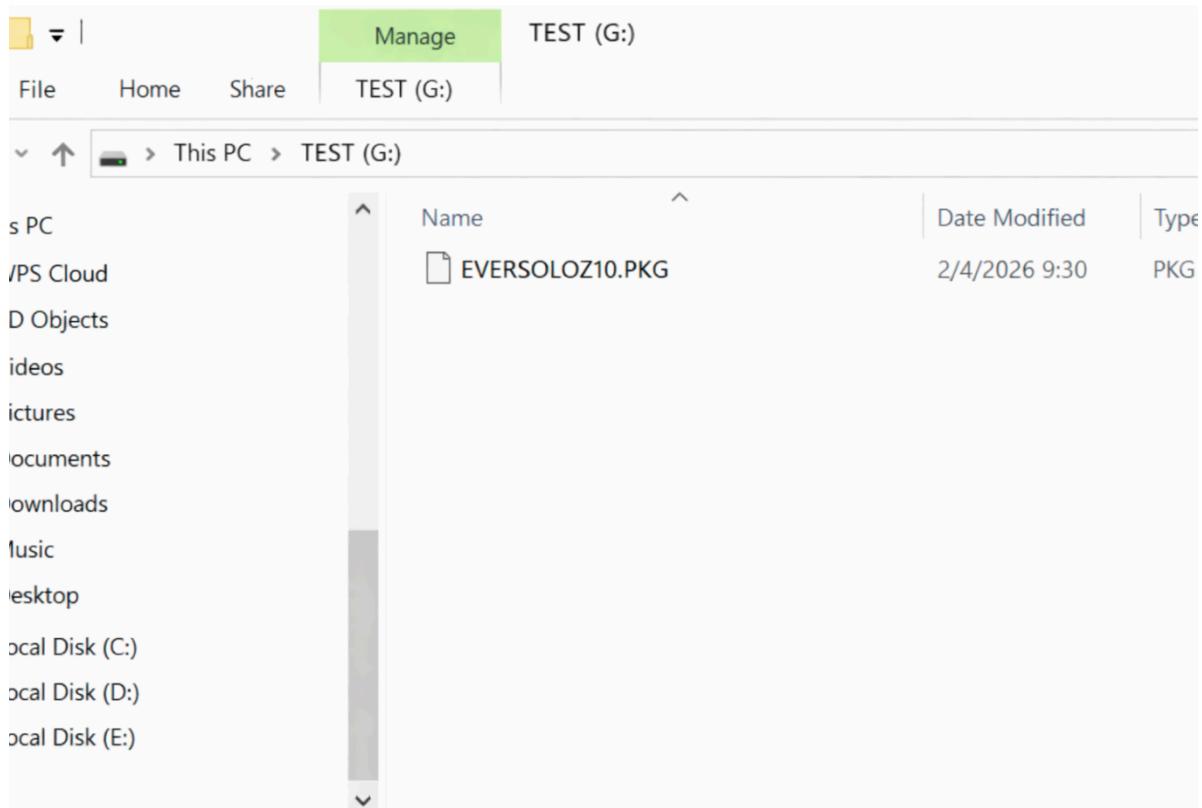

### 3. Important Notes

- Do not power off the device or remove the USB drive during the update process, as this may cause system damage.
- It is recommended to note down the current firmware version number before updating for verification if necessary.

## II. Update Procedure



### 1. Connect the USB Drive

Insert the USB drive containing the firmware file into the USB-A port on the rear of the DAC-Z10.



## 2. Access the Update Menu




- On the DAC-Z10, open the Settings interface, navigate to **General > About**.
- Tap the arrow icon next to **Software Version** to enter the System Update menu.

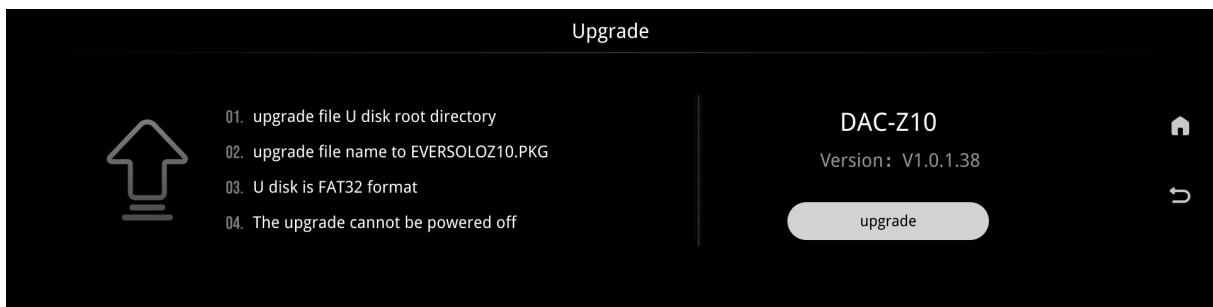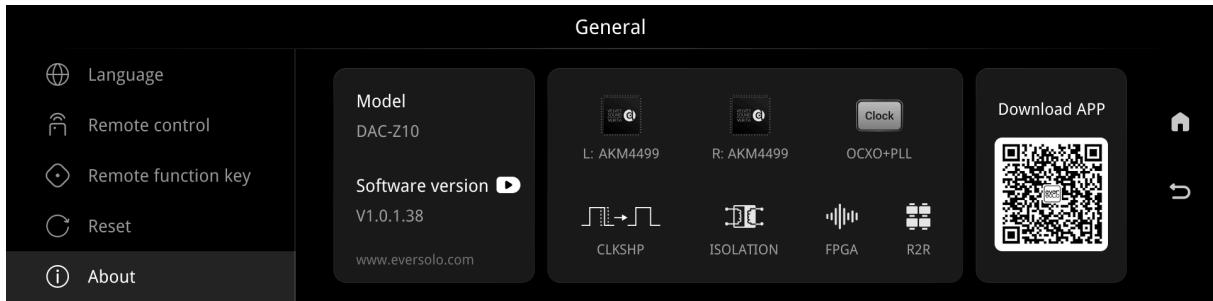

## 3. Perform the Update

- Tap **Update**. The system will search for the update file on the USB drive.
- After confirming the file is correct, the update will begin automatically.
- A progress bar will be displayed on the device screen during the update. Please wait


patiently.

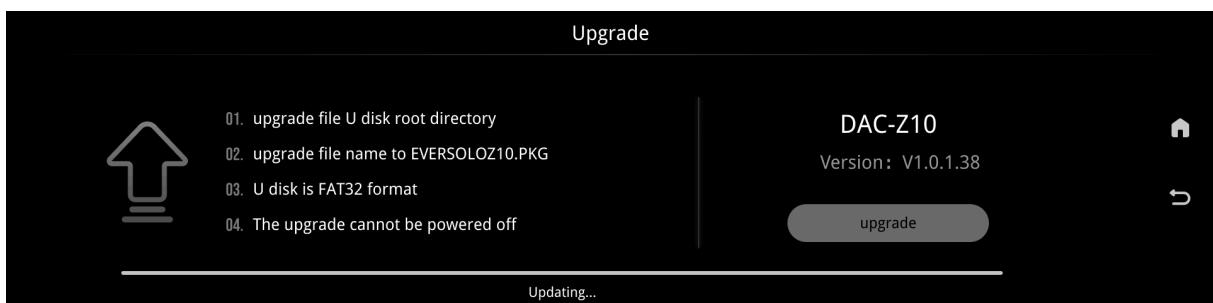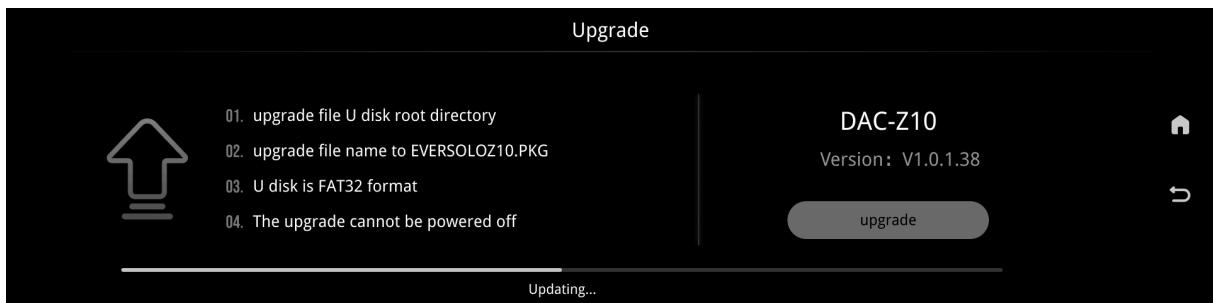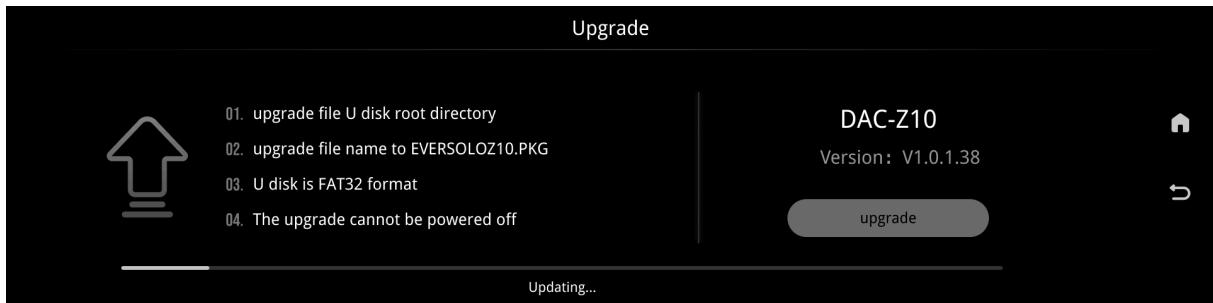

#### 4. Completion and Restart

Once the update is complete, the device will automatically restart.

After restarting, you can go to the **About** page to confirm the new firmware version number.

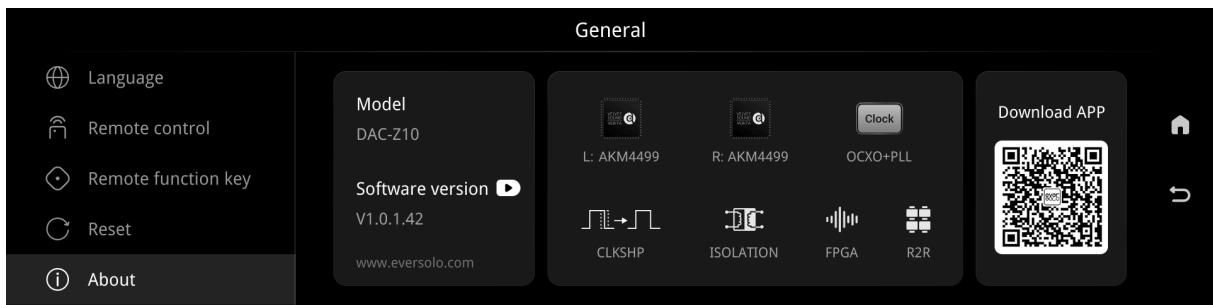

### III. Troubleshooting

- If the update file is not detected, please verify the USB drive is formatted as **FAT32**
- Ensure the firmware file is placed in the **root directory**, and the filename must be

### **EVERSOLOZ10.PKG**

- If the update fails, re-download the firmware file and repeat the steps above.
- If the problem persists, please contact official technical support.