


Aurora 80 and WAVE 75 Wireless Usage Driver Installation Guide

Important note: Due to upgrades to the underlying code of the older chip versions, QMK will no longer be usable after upgrading the RF protocol. If you need to use QMK for an extended period, please carefully consider whether to upgrade the RF protocol!


1. Download all the update packages: keyboard firmware, 2.4G receiver update package, and keyboard update package. Place them all in one folder or on your desktop for easy access.




2. Flip the power switch to OFF, then press and hold the ESC key while powering on. A USB drive will appear on the keyboard's onboard storage. Once this USB drive appears, you can upgrade your keyboard.

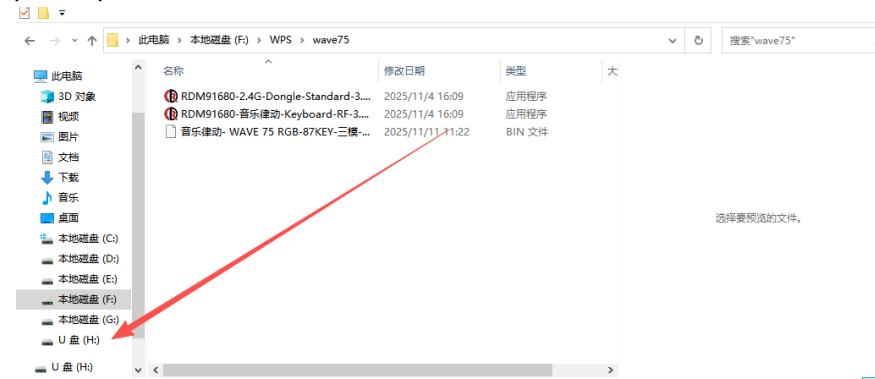


3. Keyboard Upgrade: First, open our keyboard upgrade software. After opening it, click the "Device info" button. If it displays "OK," then you can click the middle button to start upgrading the keyboard. When the progress bar reaches 100%, the keyboard firmware will be updated.
Note: After the keyboard RF protocol upgrade is complete, the keyboard will still be in boot mode, so the keyboard will not function normally at this time. You need to unplug and replug the connection cable (or upgrade the keyboard firmware immediately after upgrading the RF protocol).

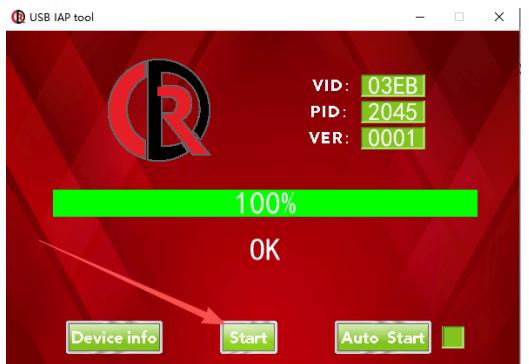

4. Firmware Upgrade: Simply drag the selected keyboard firmware BIN file to the keyboard's USB drive. The keyboard will flash and start up a few seconds after the update is complete, at which point the keyboard firmware upgrade is also complete.

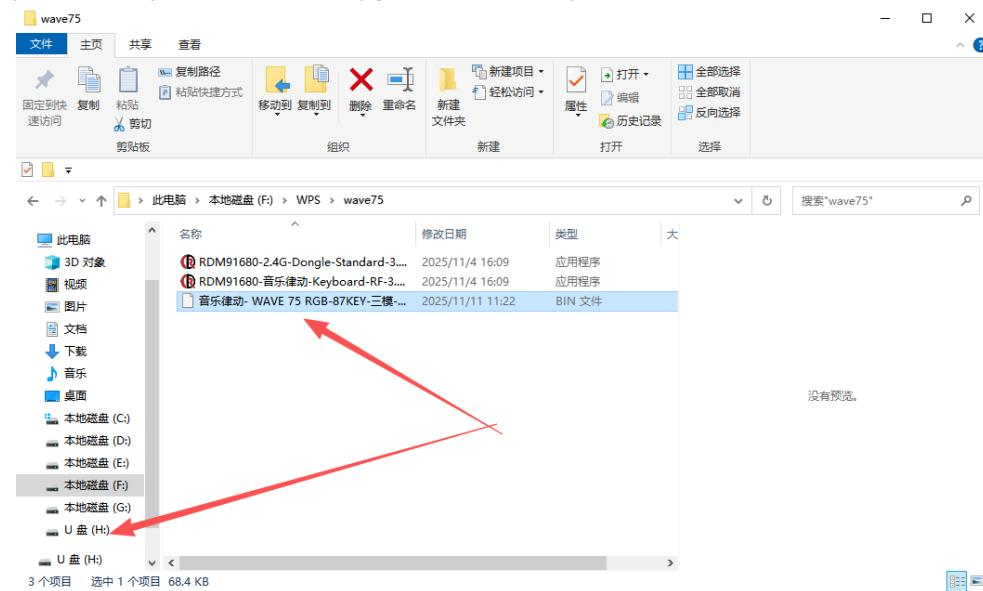

5: 2.4G Wireless Receiver Upgrade: Plug the receiver into the computer's USB port, open the receiver upgrade software, and click the Device info button. After clicking, it will display OK. Then, click the middle button to start upgrading the 2.4G receiver. When the progress bar reaches 100%, the upgrade is complete. Turn on the keyboard power switch, place the receiver on the keyboard, and press and hold FN+4 (until the 4 key light flashes rapidly). Plug in the receiver to pair successfully.

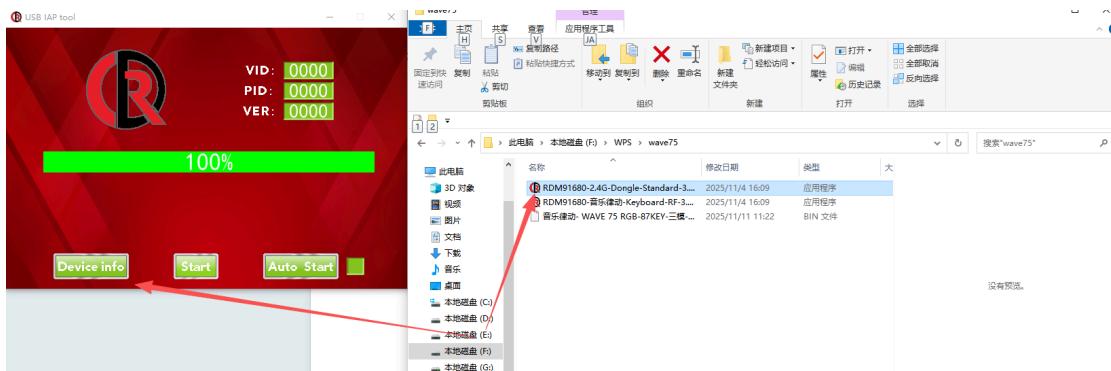

The above outlines the upgrade methods for the Aurora 80 and Wave 75. Simply download the HUB driver from the official website to use them. Since the Aurora 80 and Wave 75 are relatively early products, there may be some minor compatibility issues with the driver. We are working diligently to resolve these issues and optimize the system. If you encounter any bugs, please report them to the customer service at the store where you purchased the product or to the customer service in our group. We will follow up and resolve any issues promptly.

Thank you again for supporting PMO! We wish you all a happy life!