


The web (services)



Client (the browser)



Redux




React



Data is loaded into the state:

- a "local source" (such as p5subset)
- an ODD customization

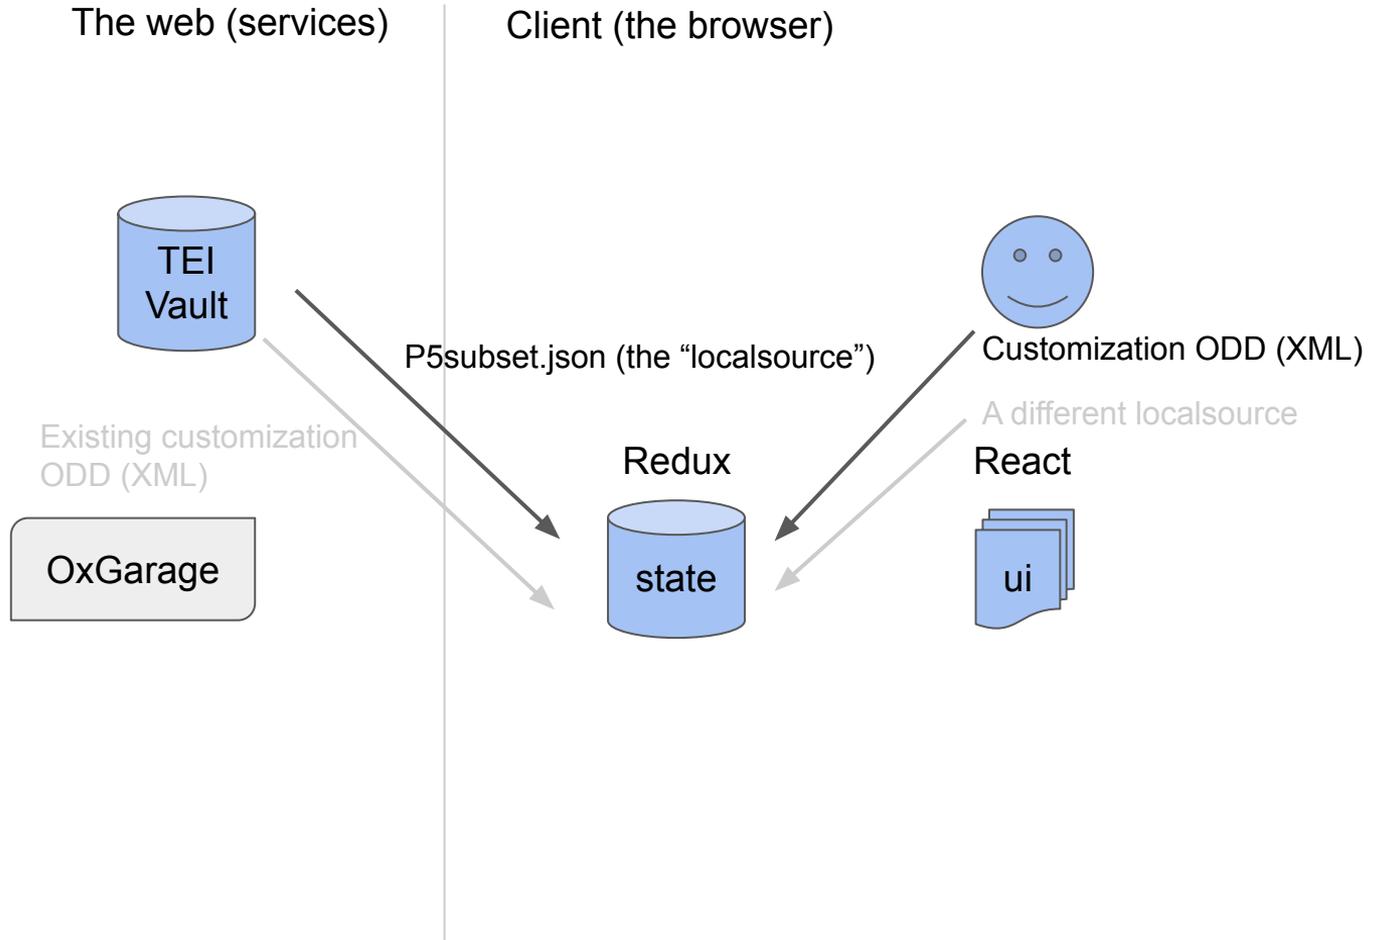


The web (services)

Client (the browser)

The customization ODD is transformed into JSON via OxGarage

The result is a JSON version of a *compiled ODD*

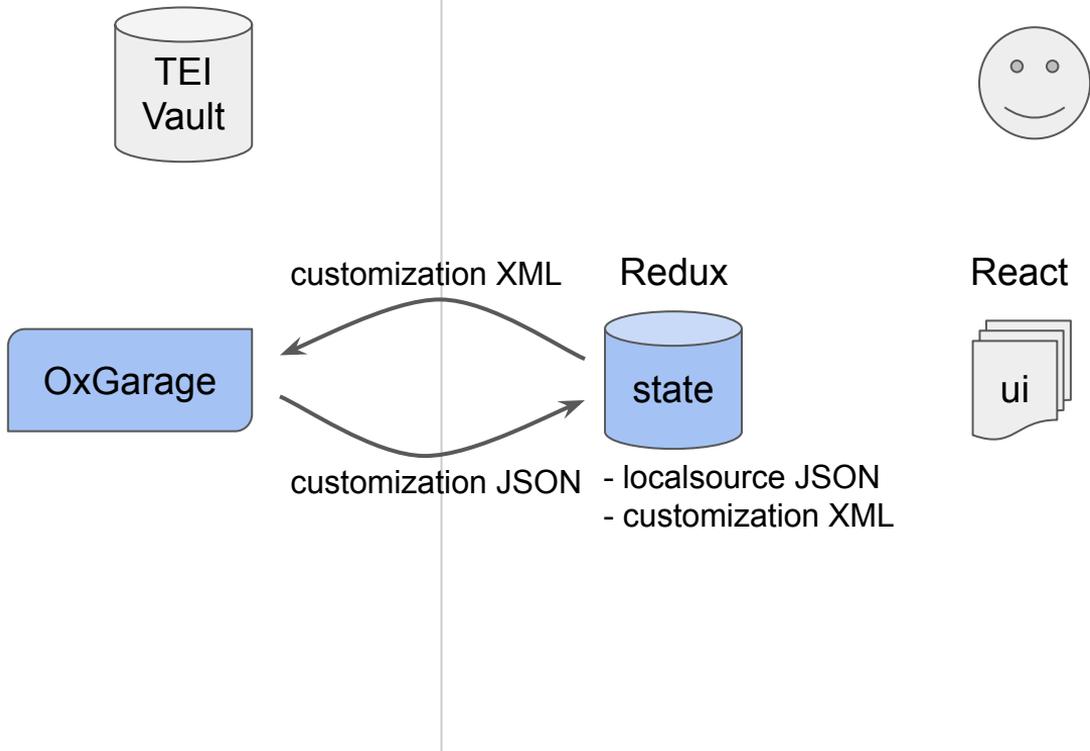

Client (the browser)

The user starts making changes via the user interface

