

NORCO FLUID FS A3

Fiche de location 2026 — Full Suspension Trail MTB — Roues 29" — Adultes S / M / L / XL / XXL



RÉGLAGES DE SUSPENSION / SUSPENSION SETTINGS

FOURCHE — RockShox Recon Silver RL

Solo Air · 140mm · Sag recommandé: 25% · 29"

FORK	Air Springs	WHEEL (in)	TRAVEL (mm)	<140 lbs (63.5 kg)	140-160 lbs (63.5-72.5 kg)	160-180 lbs (72.5-81 kg)	180-200 lbs (81-90 kg)	>200 lbs (90 kg)	MAX PSI
Recon Gold	Detonair	27.5" / 29"	80	90-100 psi	100-120 psi	125-140 psi	160-180 psi	190+ psi	265 psi
			100-120	100-120 psi	100-120 psi	100-120 psi	100-120 psi	100+ psi	205 psi
Recon Silver RL	Solo Air	27.5" / 29"	130-150	40-60 psi	60-75 psi	75-90 psi	90-105 psi	105+ psi	225 psi
			100-140	50-70 psi	70-85 psi	85-100 psi	100-120 psi	120+ psi	205 psi
Recon Silver TK		26	100						

Ligne Recon Silver RL / Solo Air / 29" · 100-140mm → 50-70 / 70-85 / 85-100 / 100-120 / 120+ psi · MAX: 205 psi

SPÉCIFICATIONS


CADRE	6061 Alloy, Ride Aligned™, Four-Bar Horst Link
TRAVEL	140mm fourche / 130mm arrière
ROUES	29" WTB ST, Continental trail tires
FOURCHE	RockShox Recon Silver RL, 140mm, lockout
AMORTISSEUR	X-Fusion 02 Pro R, custom tune Norco
FREINS	Tektro HD-M535, 4 pistons — 180/180mm
TRANSMISSION	Shimano CUES 10v — 11-48T
DÉRAILLEUR	Shimano CUES RD-U6020
MANIVELLES	FSA Comet 1X DM, 30T
TIGE DE SELLE	TranzX YSI34 dropper, 34.9mm
GUIDON	Norco Alloy 800mm, 25mm rise, 35mm clamp
PNEUS	Continental Kryptotal (AV) / Xynotal (AR) 29×2.4"
TAILLES	S / M / L / XL / XXL
PRIX	C\$2,599

Shock— X-Fusion 02 R

Sag recommandé: 25%- 35% "

Start by adjusting air to 80% of the weight and the objective is to brain the sag

CHARTRE DE TAILLE / SIZE CHART — Norco Ride Aligned™

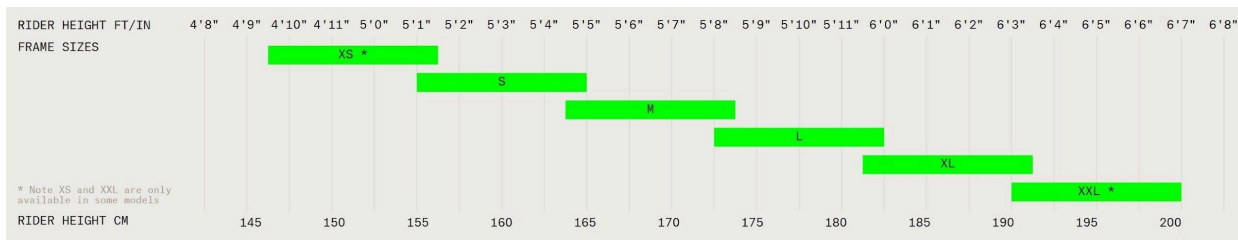

* XS et XXL disponibles sur certains modèles seulement · Clics suspension depuis fermé (sens anti-horaire)