

Table of contents :

Section 0: TIPS & TRICKS

Section 1: Installation in Vehicle

Section 2: Dash Configuration

Section 3: ECU Configuration

Section 4: Dashboard configuration

- Units selection

- Master Warning settings

- Gear Calculation

- Speed correction

- RPM and Shiftlight Settings

- Dashboard display configuration

- GPS Setup

- Datalogging

- GOPRO setup

- WIFI Setup

- Software update

- Accessing PowerTune from Laptop via WIFI

Section 0 - TIPS & TRICKS

!! DO NOT POWER THE DASH FROM A COMPUTER USB / CAR STEREO USB PORT !!

The dash requires at least 2.5A to power up safely. Powering the dash with insufficient amps may damage the SD card or the processor. Only use the supplied power supply or a hardwired source (example phone/tablet charger connected to a wall outlet)

Some of the most commonly requested questions or key things to understand:

1. When customising the dash screens, after double tapping to get the “layout menu” in the top right corner, the layout menu can be dragged from the corner and relocated around the screen as needed, by touching and dragging from the grey areas between the buttons or at the bottom.

Double tap to display the “layout menu”, then double tap on any gauge to modify that gauge using the “gauge menu”. Once you have opened the gauge menu, **close the “layout menu” showing in the top right corner by pressing the close button at the bottom**, so you can easily move the “gauge menu” around the screen without accidentally dragging other objects.

The onscreen keyboard can also be moved around by dragging it from the bar along the top of the keyboard.

First time setup is easiest done with a plugged in mouse.

2. When the customisation menu (double tap) is open on ANY of the four active dash screens, the gauges become unlocked/movable on ALL FOUR screens. **Keep the menu closed when not customising.**
3. Don't forget to press save in the double-tap menu after making changes to your dash screens.
4. Swipe down from any dash screen to get the brightness dimmer slider
5. To change the startup video and images, connect to the dash using a laptop (see WINSCP at end of this document) over WiFi. Locate bootvideo.mp4 (startup video) in the main directory, as well as Logo.png in the LOGO folder.

The easiest way to modify the startup logo is to copy Logo.png onto your computer, right click and select EDIT, make your changes and then copy back to the logo folder. The resolution of the Logo image **MUST** be 800 X 480 pixels

The startup video can be replaced with any mp4 file, however will only play for two seconds regardless of length.

Section 1 - Installation in Vehicle

Connect the Power Supply to Ground and a Switched 12V source (ignition). If you ordered GPS, remove the GPS holder (pictured right below) and insert the GPS module (it only fits one way!). Once inserted, match the numbers of the four connected wires to the numbers labelled on the case for the GPS connection (1 goes to 1, 2 goes to 2, ect)




GPS + CAN Cable


For the GPS module (if ordered), simply connect the pins on the GPS module to the pins on the dash, matching the numbers in each pair. **Pin 1 to 1, 2 to 2, 3 to 3 and 4 to 4.**

Depending on ECU, connect your ECU Cable to the ECU and your PowerTune Dash CAN HI and LO connection points. The blue wire always goes to CAN LO on the dash.

For Apexi /Nissan Consult, insert the ECU cable into one of the USB ports on the side of the Dash, for CAN ECU's insert the CAN cable into the CANBUS port of the Dash

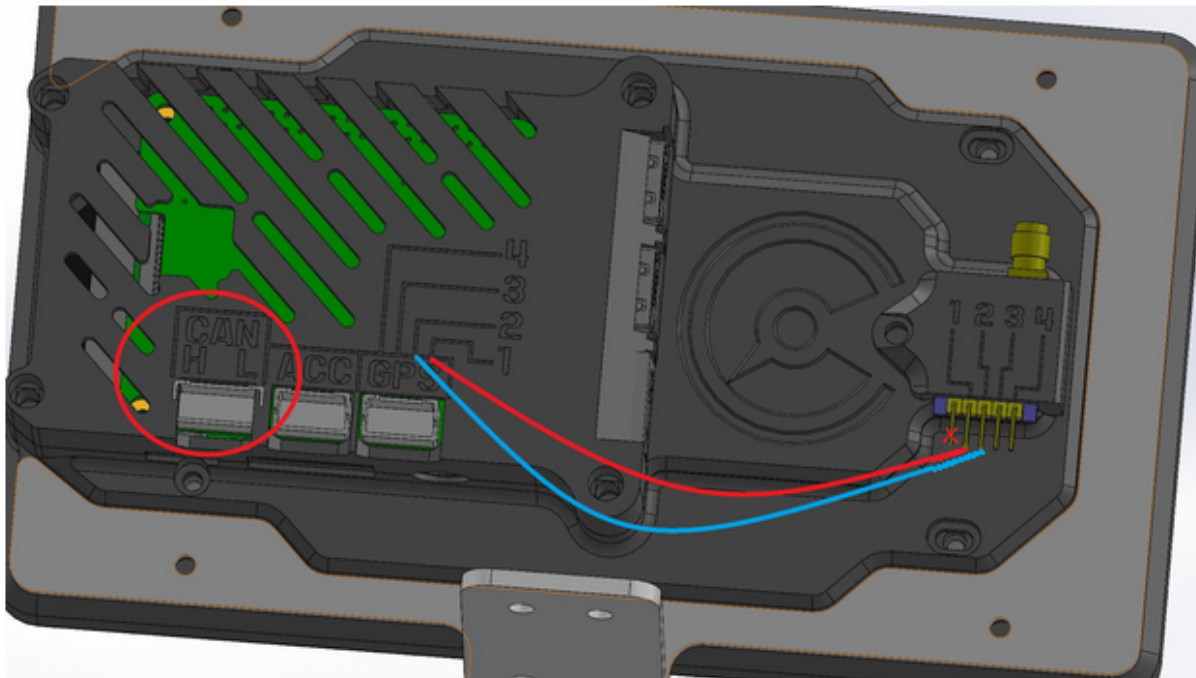


For LINK/VIPEC ECU, the MIDDLE pin on the ECU plug is can HI. The pin off to one side is can LO.

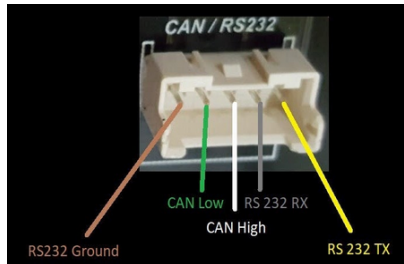


HALTECH PLATINUM AND ELITE


Top row pins are CAN LO, bottom row pins are can HI

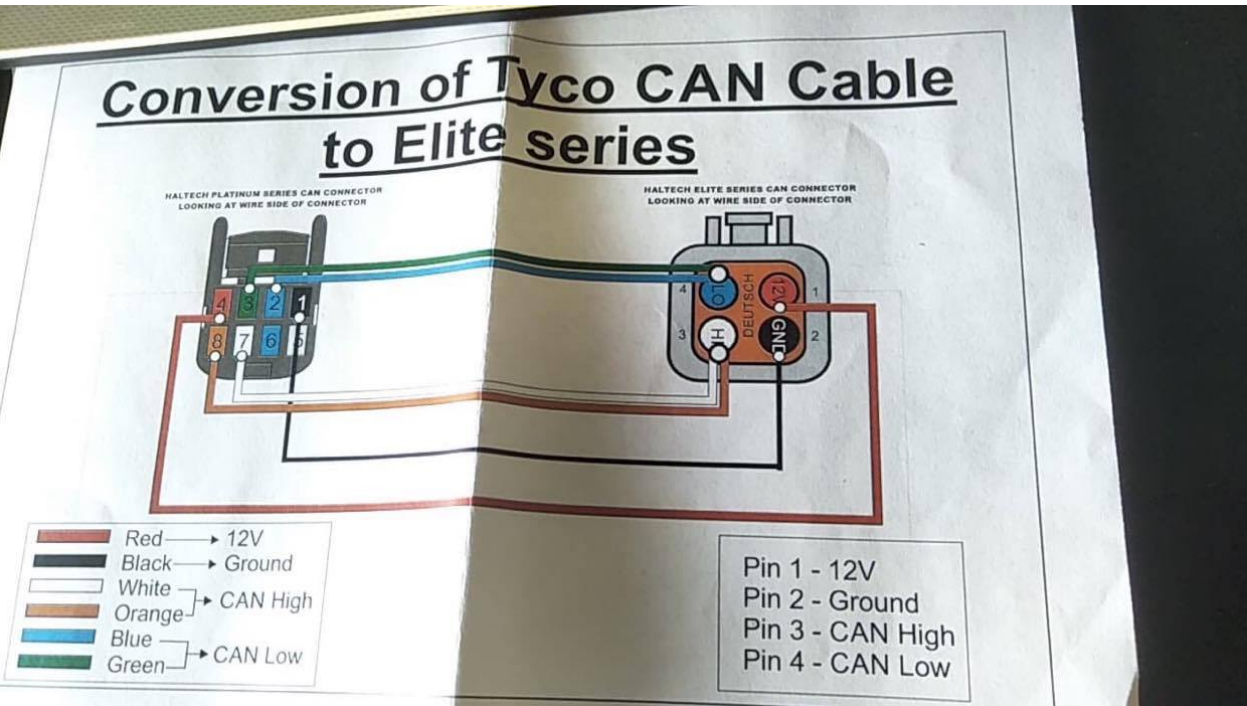

For Apexi the communication port is the circle port on the Side of the ECU

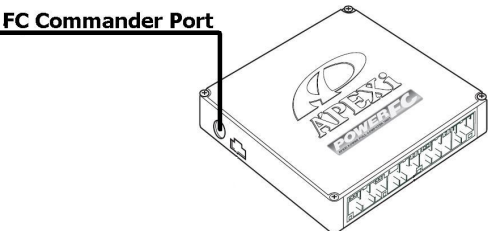

Nissan Consult Port is located in the footwell area near the drivers fuse box

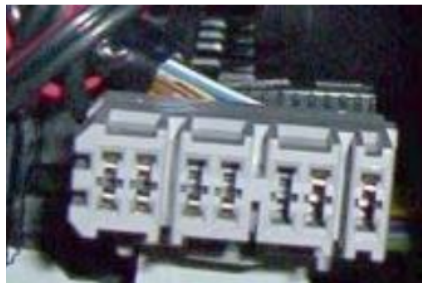


Other ECUS: Consult the User Manual of your ECU to locate the CANBUS port (some examples Below)


For Toyota86/BRZ - the can socket is the white plug “option connector” located behind the stereo

For DTAFast: CAN H pin 16.CAN L Pin 17 (from pin insertion side)


Microtech ECU

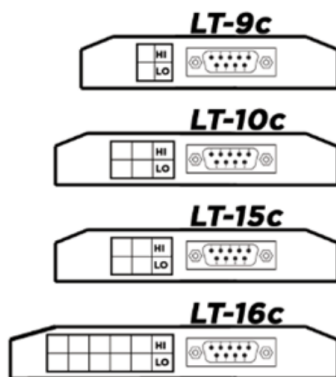

EVO X: (pin 90 HI and 91 LOW)

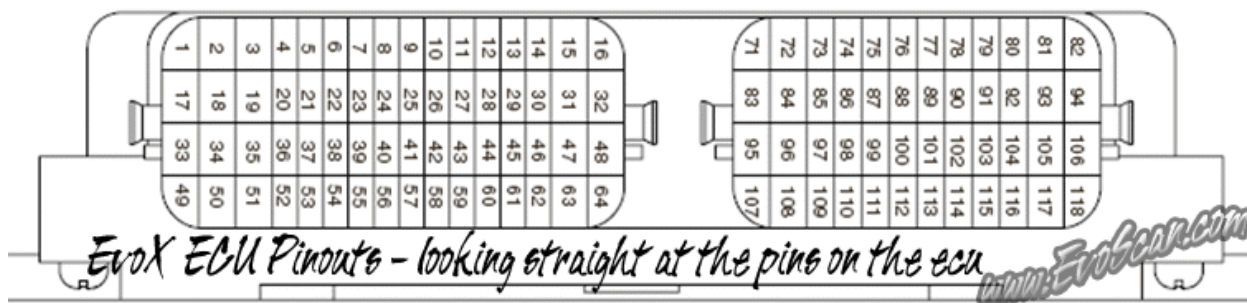


Hondata:

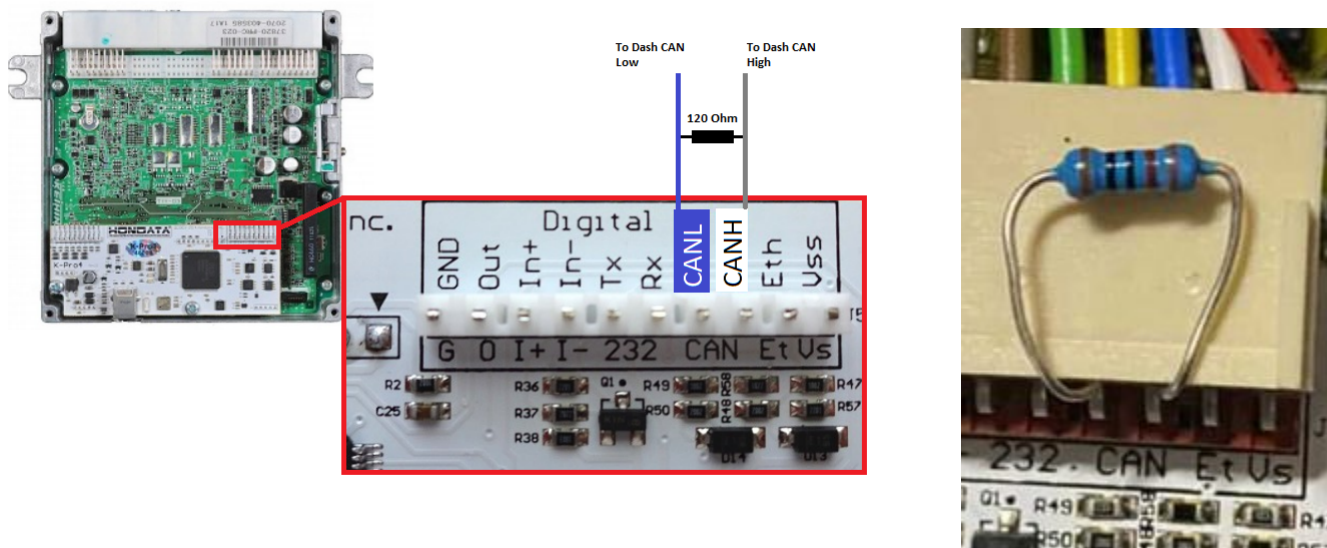

Section 2 - PowerTune Digital dash configuration


• CANBUS

1. In the main Settings screen, set ECU selection to "CAN" (default)
2. Touch the connect button to the pressed position (default)

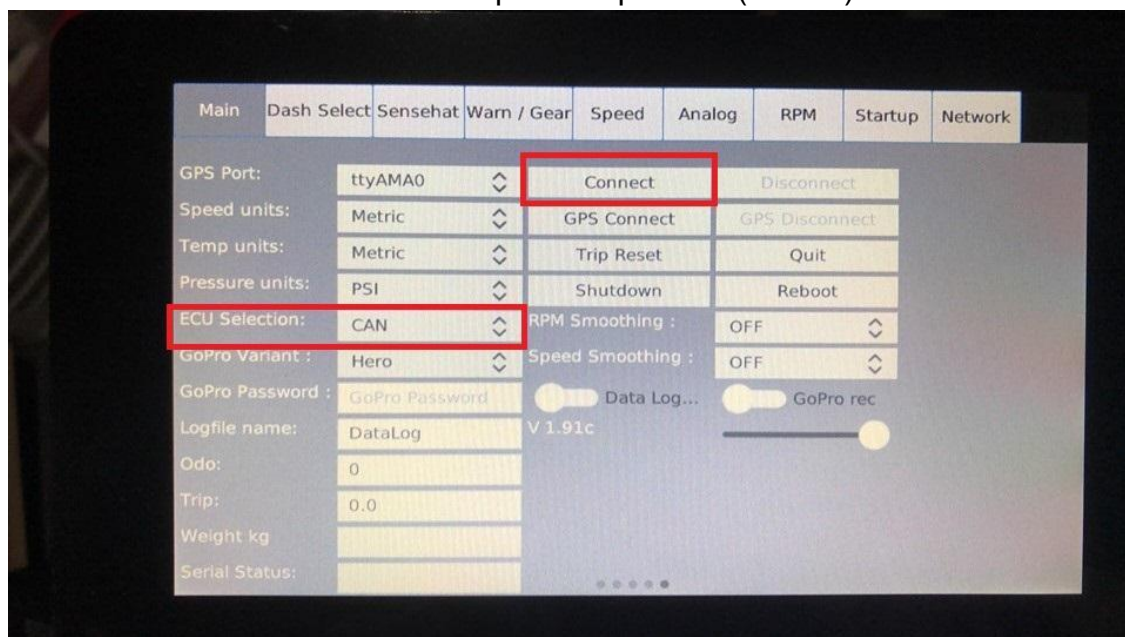

3. In the Startup settings page, scroll through the list and select your ECU (For Apexi, set to none)

4. **Ensure the CAN bitrate is set correctly** (see table below)
5. Ensure the speed source is set correctly (ECU or GPS)
6. Click apply and the dash will reboot

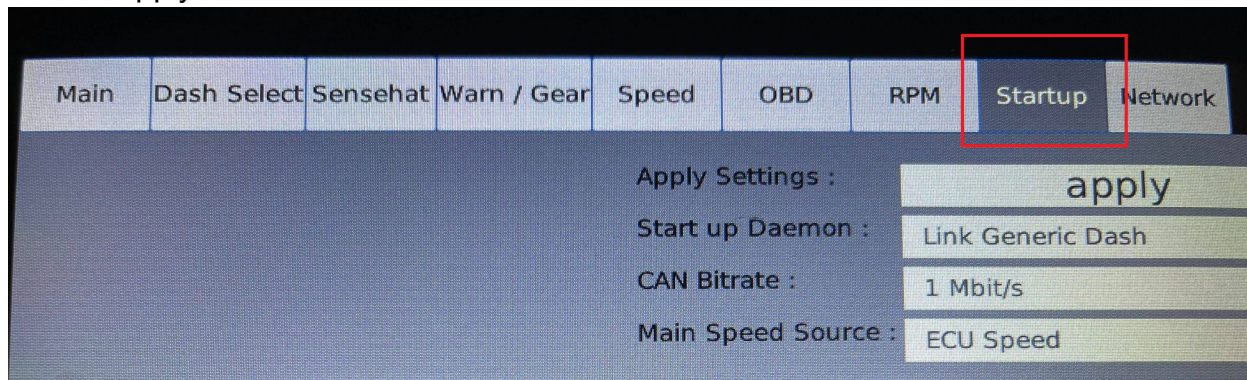


SETTING THE CORRECT CAN BITRATE - VERY IMPORTANT!

Required dash bitrate	Set with ECU Type
1mbit/s	Link / Haltech / Emtron / Motec / Adaptronic / ECU Master / Microtech / Emerald K3+K6 / Hondata KPRO
500kb	<i>Aftermarket ECU:</i> AEM / MaxxECU / WolfEMS / Megasquirt 2-3 / Hondata S300 <i>Stock ECU:</i> GM/+LS / Ford Barra / GT86+BRZ / EVO X / 350+370z / WRX / OBD2
250kb	EMS EMTECH
N/A	Nissan Consult, Apexi FC

For Nissan consult/OBD2:

Step 1 - In the main settings tab (pictured on the previous page), Change the ECU selection dropdown box to the relevant ECU choice (if the box is greyed out, press disconnect at the top first!)

Step 2 - In the Settings menu click on the Consult/OBD settings Tab along the top

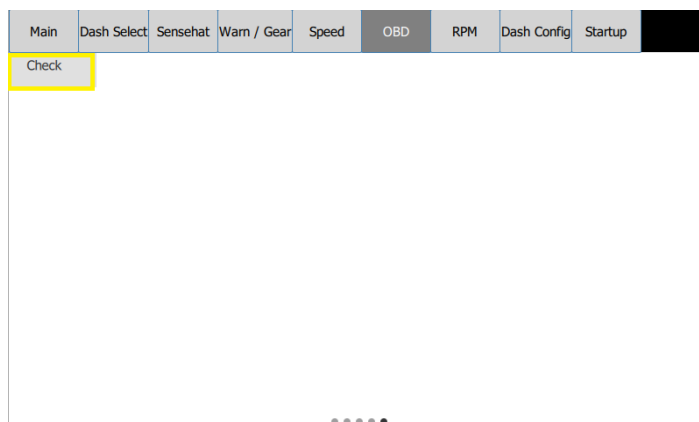

3. Click Check
4. Select the values you want to poll from the ECU
(the more you choose the slower the update rate)
5. Click Apply (The Dash will reboot and your ECU communication is finished)

Section 3 - ECU Configuration

Link / Vi-PEC - Open the CAN setup within PC Link (link ecu software)

CAN Setup

Mode

Streams

Test Calculator

CAN Devices

CAN Configuration

CAN Module

☒ CAN 1

☐ CAN 2

Mode

User Defined

Bit Rate

1 Mbit/s

OBD

☒ OFF

☐ ISO 15764-4 on CAN 1

☐ ISO 15764-4 on CAN 2

Data

Channel 1: Transmit Generic Dash

Channel 2: OFF

Channel 3: OFF

Channel 4: OFF

Channel 5: OFF

Channel 6: OFF

Mode

Transmit Generic Dash

Transmit Rate

20 Hz

CAN ID

ID

1000

Format

☒ Normal

☐ Extended


Help

Apply

Ok

Cancel


Example Custom frame for fuel tank level:

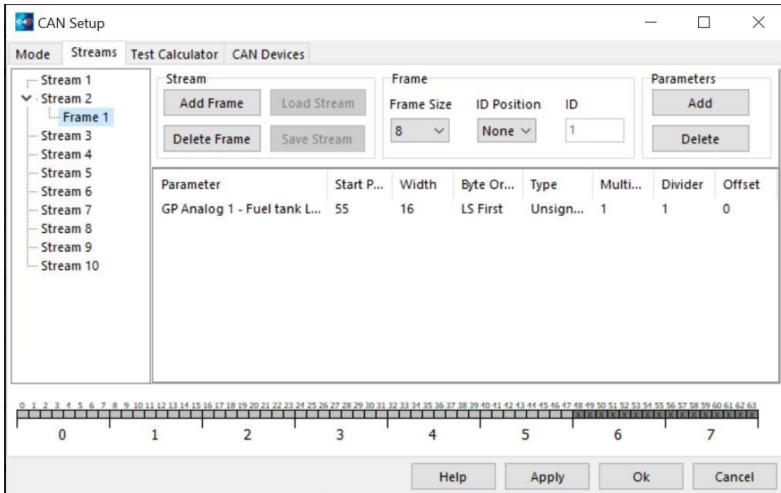



Haltech

Haltech automatically outputs at 1mbit over CAN and does not require configuration in almost all cases. In some circumstances CAN output channel (AUX/MAIN) may need to be enabled at 1mbit in the Haltech windows software ECU Manager/ESP.


Emtron


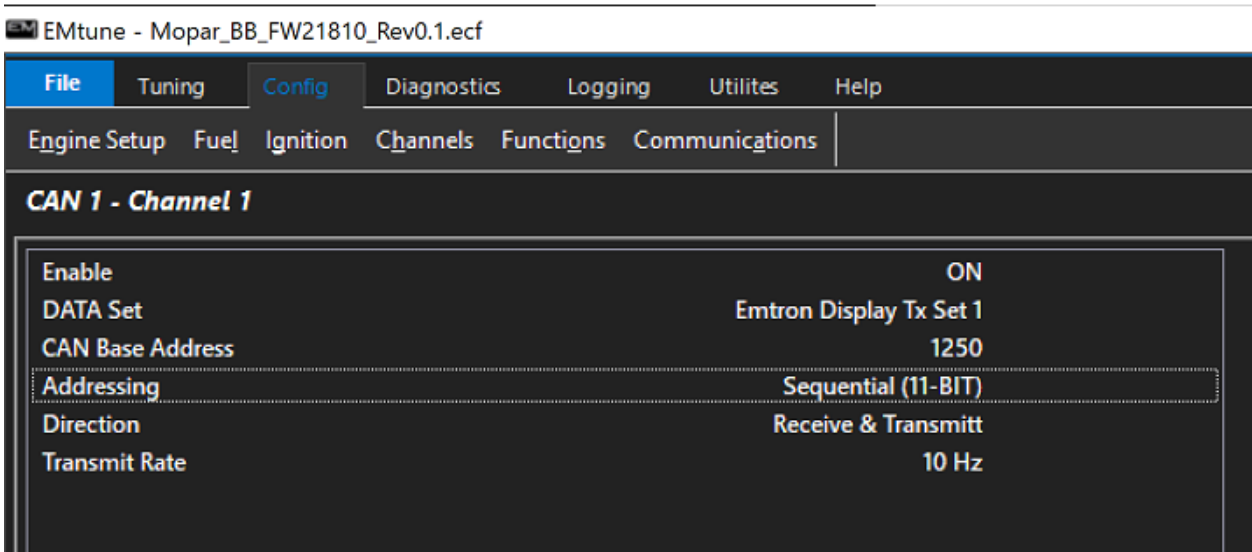


AEM

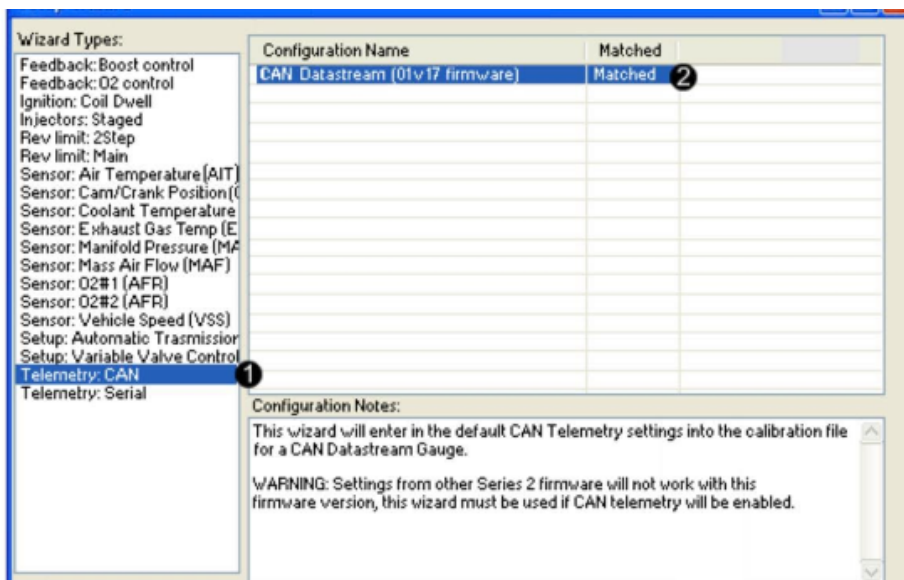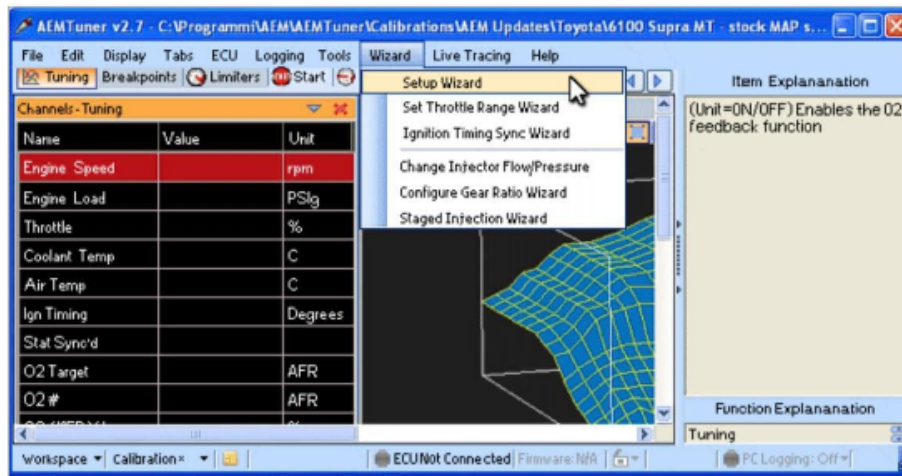


EMU BLACK + ADDITIONAL EMU SETTINGS

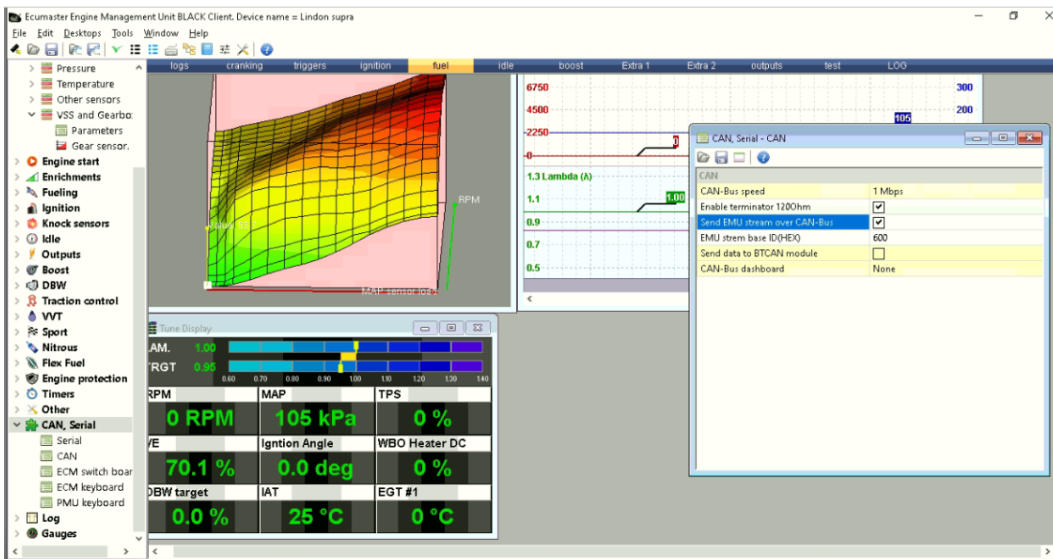


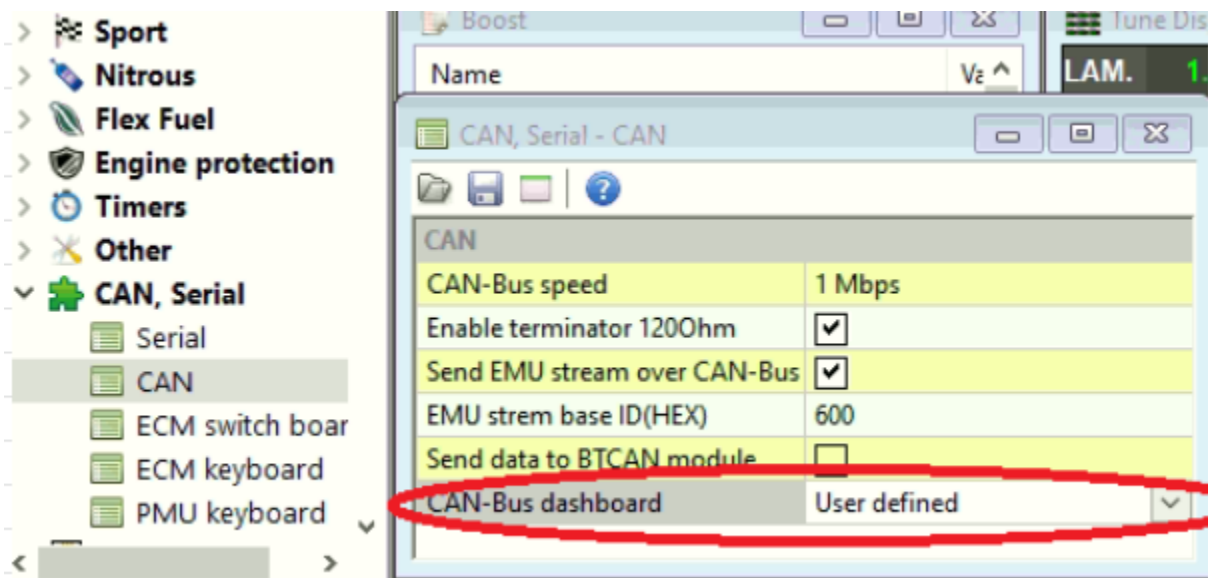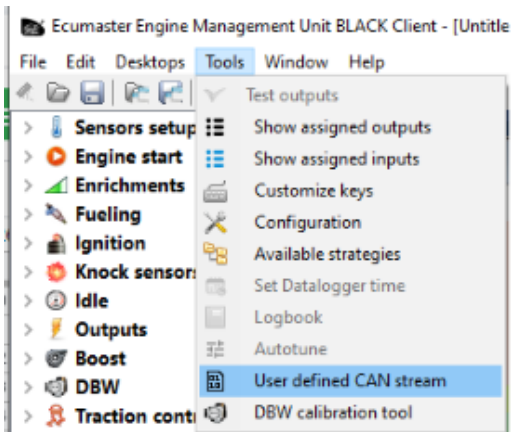

HONDATA - TRANSMIT RATE 20HZ on S300, 80HZ ON KPRO

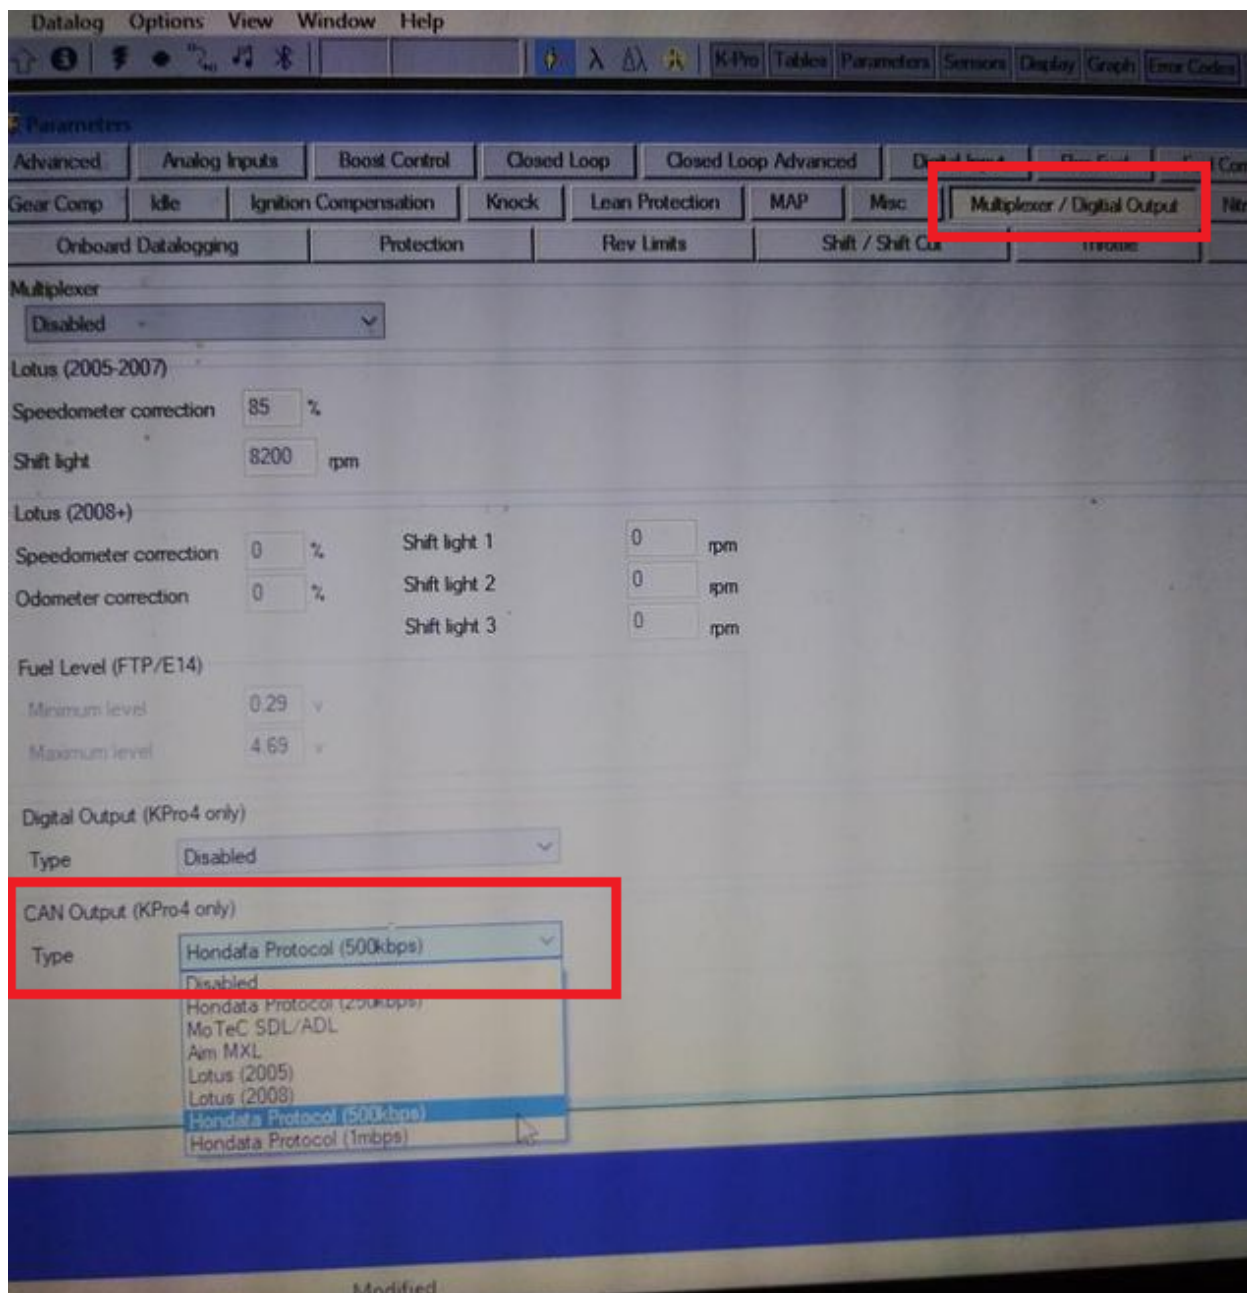

MEGASQUIRT (requires ECU firmware 3.4.4)

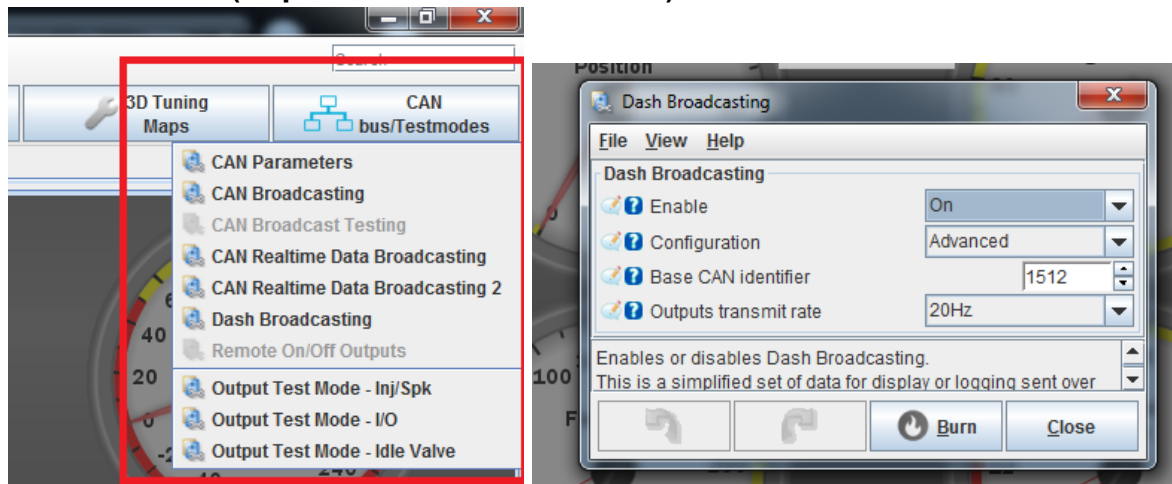

TunerStudio MS v3.1.06 - miataTurboMap (MS2/Extra 3.4.4 release 20201006 18:17BST(c)KC/ISM/JB PNP Registered to: Zachary Stroman)

File Options Data Logging Communications Tools Help

Basic Load Settings Fuel Settings Ignition Settings Startup/Idle Accel Enrich Boost/Advanced 3D Tuning Maps CAN bus/Testmodes

Gauge Cluster Tuning & Dyno Views Graphing & Logging Diagnostics & High Speed Loggers Tune Analyze Live! - Tune For You Notes

CAN Parameters

File View Help

CAN Parameters

☒ My CAN ID 0 ☒ Enable Ports Polling Disable

☒ Master Enable Enable ☐ Remote CAN ID 5

☒ Enable PWM Polling Disable ☐ Remote Table Number For Ports Data 7

☐ Remote CAN ID 5 ☐ Remote Table Offset For Ports Data(bytes) 75

☐ Remote Table Number For PWM data 7 ☐ Remote Ports Direction 3 inputs

☐ Remote Table Offset For PWM data(bytes) 58 ☐ Remote Port 1 Type Digital (8 signals)

☐ Remote PWM Clock Frequency(MHz) 24 ☐ Remote Port 2 Type Digital (8 signals)

☐ Remote PWM Clock Prescale 128 ☐ Remote Port 3 Type Digital (8 signals)

☐ Use For Remote On/Off Outputs Disabled

CAN ADC Selection

CAN ADC Group On/Off CAN Id Table Offset

☒ CAN ADC 0-3 Disable 5 7 (bytes) 2

☒ CAN ADC 4-7 Disable 5 7 (bytes) 10

Set to 0 unless specifically wanting to configure this as a secondary data capture ECU.

Not Ready Not Cranking ASE OFF WUE OFF TPS Accel Enrich MAP Accel Enrich TPS Decel MAP Decel Config Error Need Burn Last Data Not synced

Half-syno Fuel Tbl sw Spk Tbl sw N2O 1 N2O 2 Hard limit Launch Flat shift Spark cut Not connected Over boost CL Idle Knock

No Fuel cut T-log MAPsample error Test mode No soft limit No seq. shift Data Logging Protocol Error

Main Dashboard

miataTurboMap: miataTurboMap Offline PrefirmwareUpgrade_2021-04-22_18.16.15.msq

9:39 AM 5/2/2021

TunerStudio MS v3.1.06 - miataTurboMap (MS2/Extra 3.4.4 release 20201006 18:17BST(c)KC/ISM/JB PNP Registered to: Zachary Stroman)

File Options Data Logging Communications Tools Help

Basic Load Settings Fuel Settings Ignition Settings Startup/Idle Accel Enrich Boost/Advanced 3D Tuning Maps CAN bus/Testmodes

Gauge Cluster Tuning & Dyno Views Graphing & Logging Diagnostics & High Speed Loggers Tune Analyze Live! - Tune For You Notes

CAN Broadcasting

File View Help

CAN Broadcasting

☒ Enable Broadcasting On

☒ Broadcast Interval(ms) 60.0

☒ 0x280 RPM * 4 Off

☒ 0x280 RPM * 1 Off

☒ 0x289 Coolant On

☒ 0x316 RPM Off

☒ 0x329 Coolant On

☒ 0x561 AlfaFiat/Lancia dash Off

☒ 0x361 AlfaFiat/Lancia On

☒ 0x041 AlfaFiat/Lancia Off

☒ User defined testing Off

Enables broadcasting of parameters over CAN.

Not Ready Not Cranking ASE OFF WUE OFF TPS Accel Enrich MAP Accel Enrich TPS Decel MAP Decel Config Error Need Burn Last Data Not synced

Half-syno Fuel Tbl sw Spk Tbl sw N2O 1 N2O 2 Hard limit Launch Flat shift Spark cut Not connected Over boost CL Idle Knock


No Fuel cut T-log MAPsample error Test mode No soft limit No seq. shift Data Logging Protocol Error

Main Dashboard


miataTurboMap: miataTurboMap Offline PrefirmwareUpgrade_2021-04-22_18.16.15.msq

9:39 AM 5/2/2021


MOTEC M800 - SET THE CAN ADDRESS TO 1520

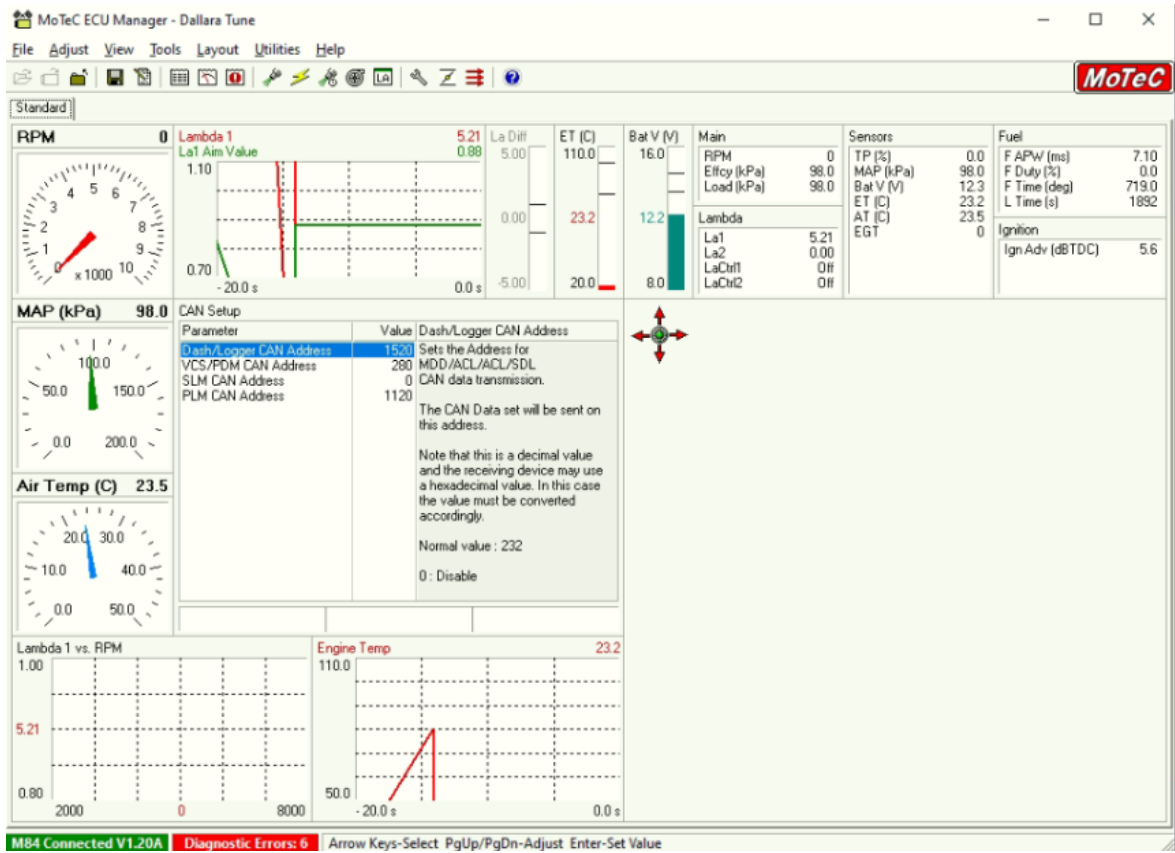

Wolf (Can Hi pin B25, CAN Lo B26)

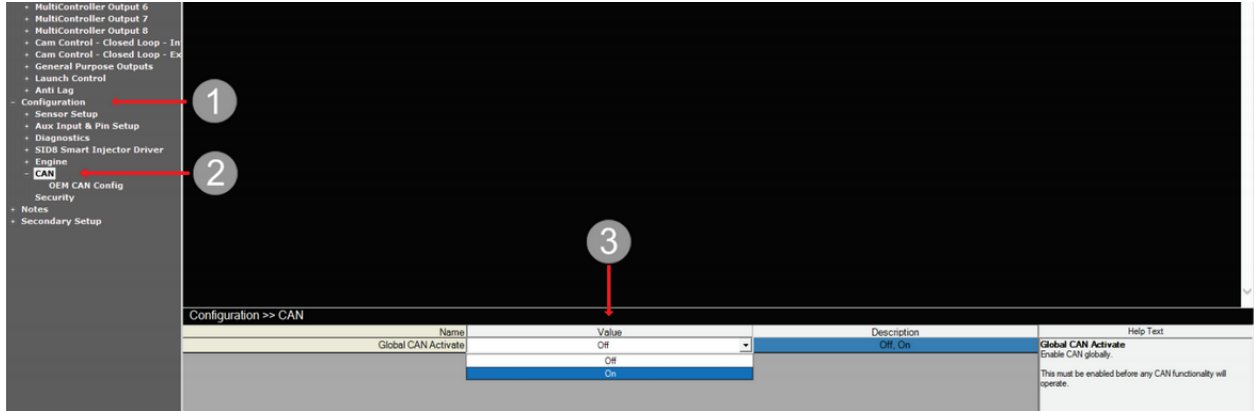

EMS:

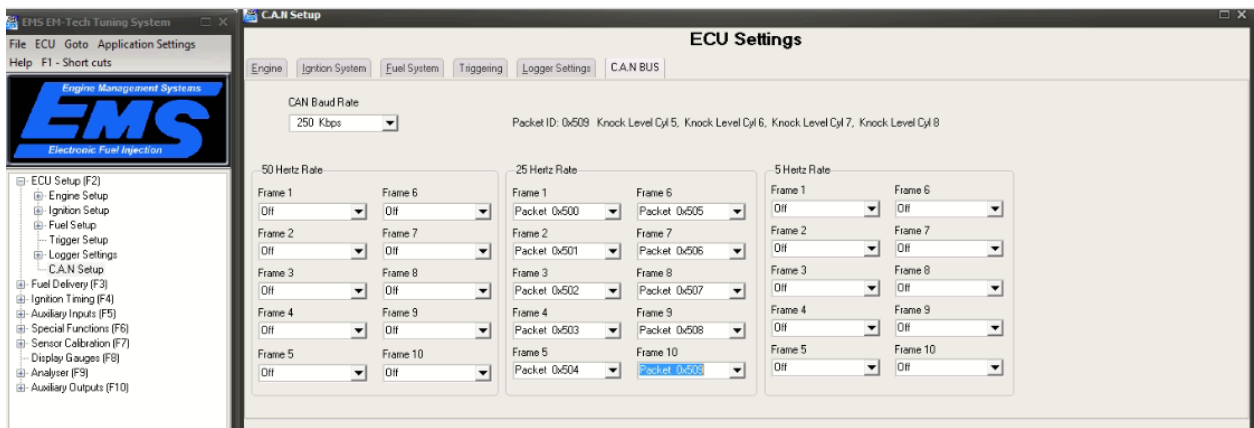


Master Warning settings


In The Settings screen click the Warn/Gear Tab

Enter the Values that you want the Warning to trigger.
If you don't wish to have warnings, just set the values to a higher value than possible
Easter Egg :

The Revs warning Triggers a Danger To Manifold Warning like the one in a certain movie ☺

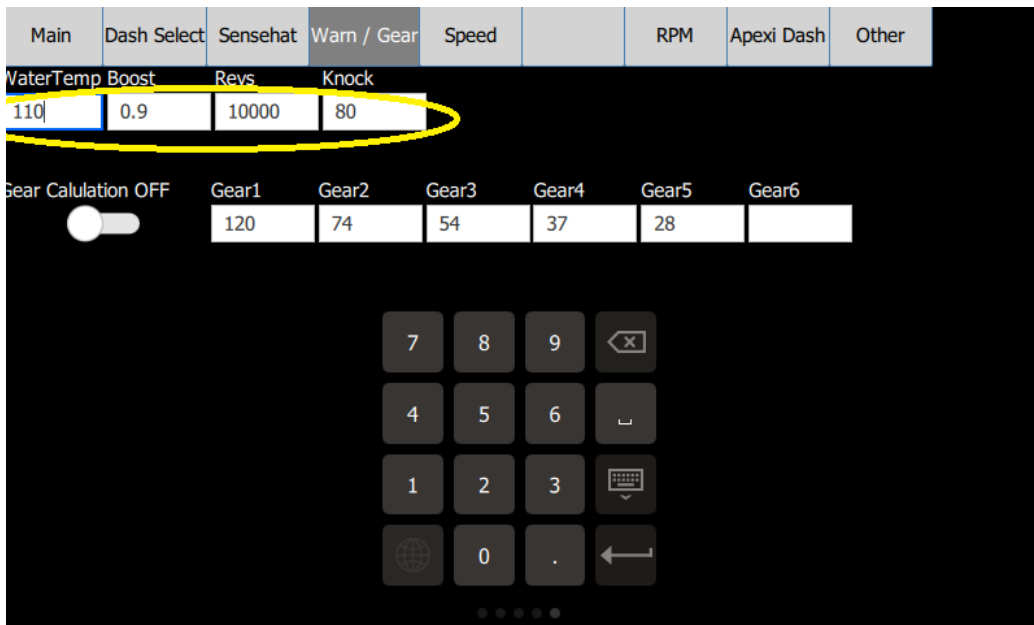

Warning Example

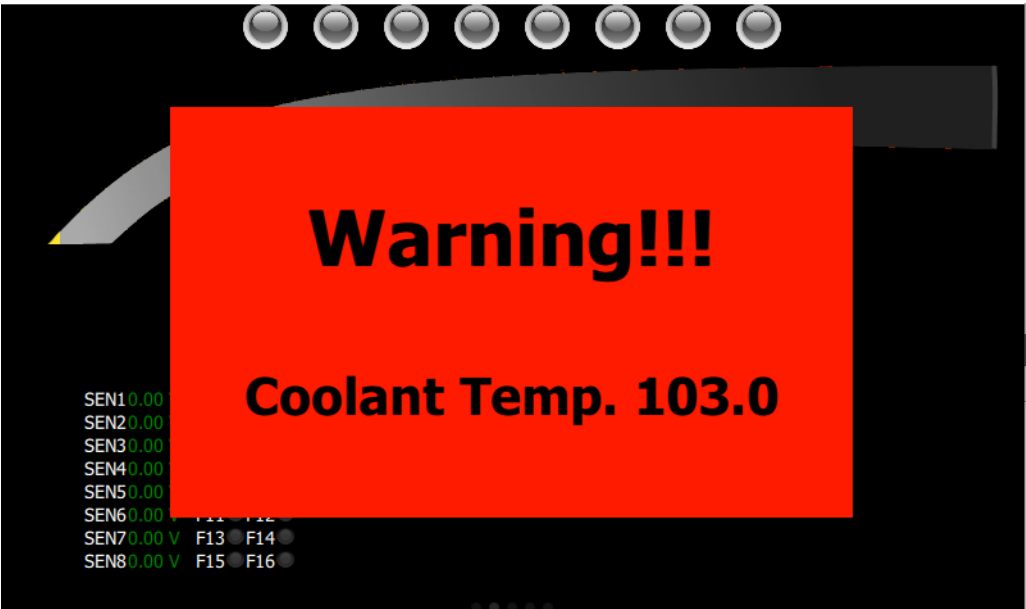

Speed correction

In some vehicles, both the original analogue cluster and PowerTune will show incorrect speed readings for a variety of reasons beyond just an old car, such as in situations where different size wheels and tyres have been put onto a vehicle. Firstly, have a friend measure your highway speed using a third party device (smartphone GPS app) and compare this with your speedo reading.

In the Speed Correction TAB enter your correction factor in percent, 100 is default and will display the value as sent by the ECU to the display.

Example:

Your friend tells you the smartphone says you are driving at 100 KM/H per hour but your speedo shows 90 KM/h, which is 10% too little. You then enter 110 in the speed correction and this will show 10% more speed than what is read from the ECU


Main	Dash Select	Sensehat	Warn / Gear	Speed		RPM	Startup	
Speed Correction %								
110								

RPM and Shiftlight Settings

Click on the RPM Settings TAB

- 1. Enter the max Value Your RPM Gauges should display (this does not affect ECU settings, nor does any other PowerTune feature)
- 2. The shift Lights on the Dashboards have 4 Stages
Enter the RPM value that triggers each Stage

Main	Dash Select	Sensehat	Warn / Gear	Speed		RPM	Startup	
MAX RPM	Shift Light 1 (g)		Shift Light 2 (g)		Shift Light 3 (y)		Shift Light 4 (r)	
8000	3000		5500		5500		7500	

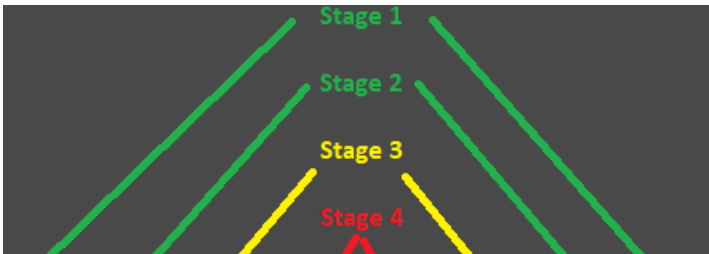


Dashboard display configuration

You can select 4 Different active dashboard screens from the dropdown boxes in the “dash select” tab of settings.




Some dashboards in PowerTune are configurable, such as UserDash. In order to begin building a dash, in the dash select screen, add UserDash1 one of the four active displays. Scroll across to this display, which will be an empty black page. **Start building your dash by double tapping the black page. When the main menu is open, all the gauges across all four dashe screens become unlocked and can be moved around. Keep the menu closed when not needed!**

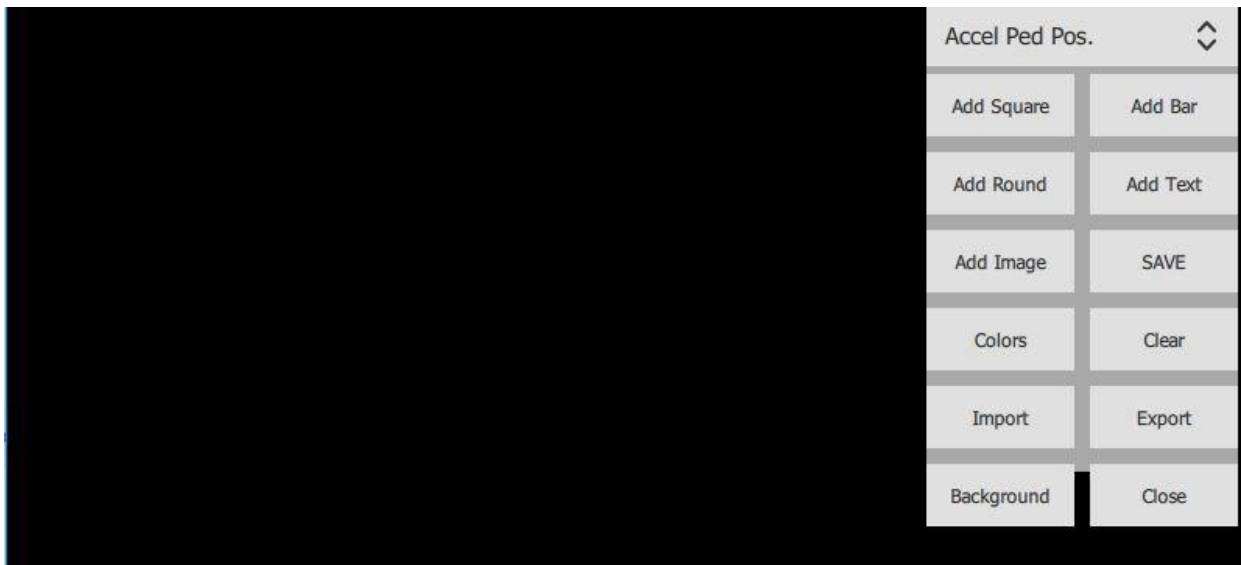


From the dropdown box in the top right corner, select the desired sensor and then start by clicking ‘add square’ to add a square style gauge. Once the gauge has been added, you can double-tap on the gauge to modify the look, style, warnings and limits as well as the labels.

Double-tap on the gauge, this will allow you to move the gauge by dragging it across the screen and will also bring up the settings menu for the gauge, allowing you to change a variety of values. For example, if we wanted the gauge to flash red if the Oil Pressure drops below a certain level, we would select “set min warning” and enter the lowest acceptable number before the gauge starts flashing red to warn you. To remove the gauge, scroll down in the options list and select


“remove gauge”

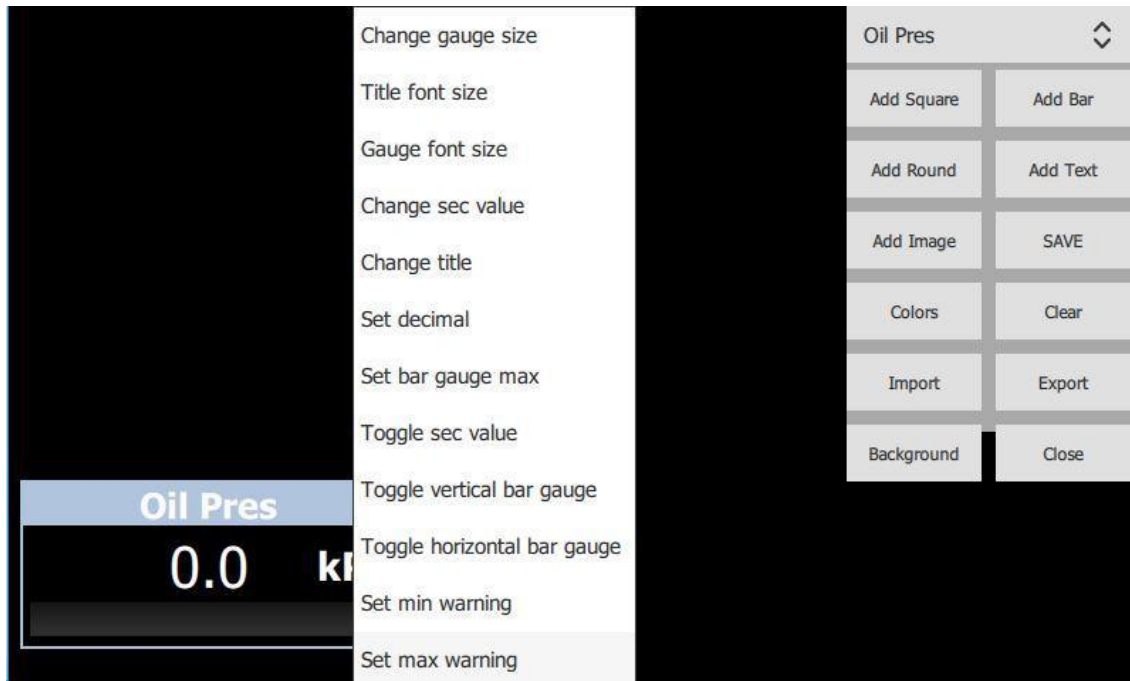


From the same menu where you added the square gauge, note the other buttons available. The “save” button will save your changes for the next reboot. The “background” button will allow you to add your RPM/speed bar style, background pictures and colours. To add background images, put the files (PNG FILES ONLY) in the folder /home/pi/Logo
If you want the background image to perfectly cover the entire display, the resolution for the image must be 800x480 pixels

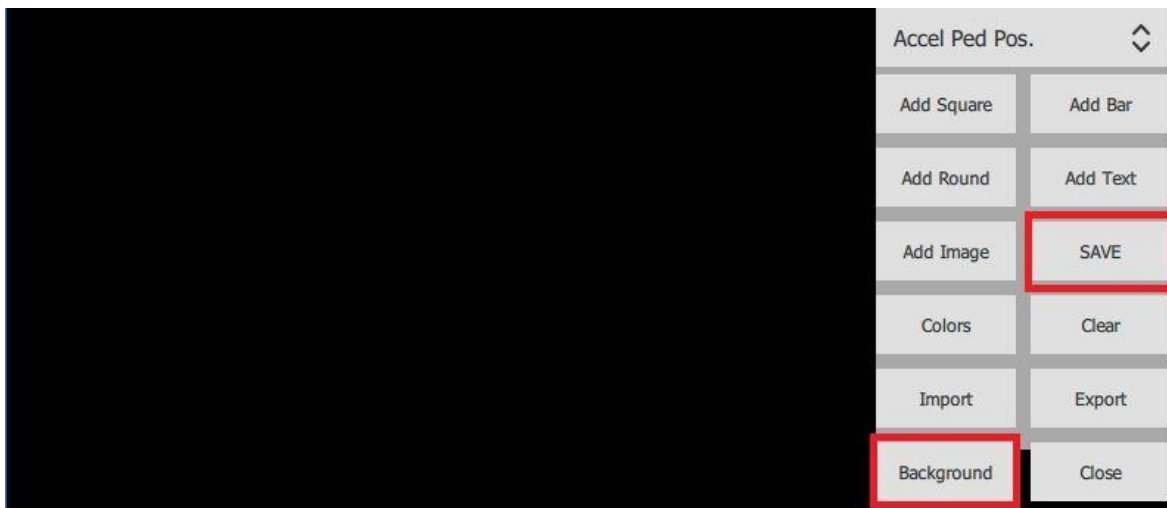

Set the RPM style in the top right corner to your preferred taste. Power-FC users have the option to add sensor states using the “extra” menu.

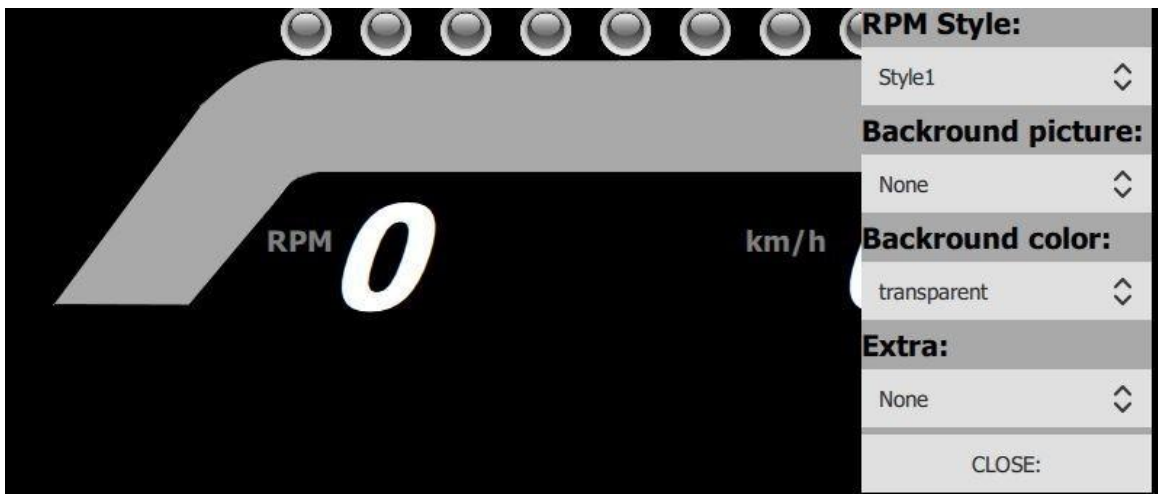

Example dash:

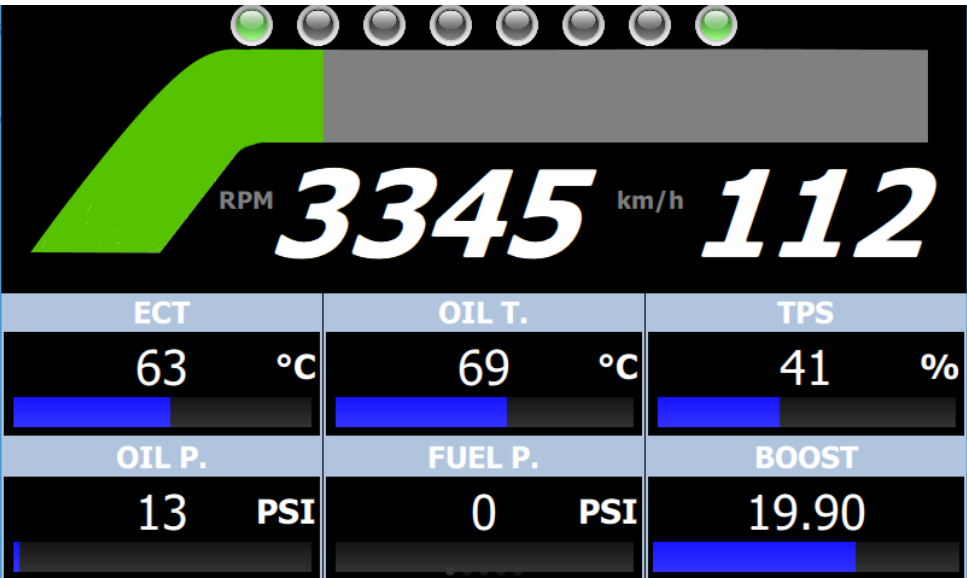

Setting up the Gear Calculation Feature :

If your ECU does not send the current gear you can switch on the gear calculation feature. (Leave the switch off if your ECU sends this information)

In the Settings screen click on the “Warn/Gear” Tab


To make the Gear calculator work you need to set up the values per gear .

RPM divided by Speed gives a fixed number for each gear .

Drive your car and record the speed at a specific rpm for each gear (you can choose different rpms per gear, just record the speed you are driving, the current rpm and note which gear you are in) . You can round the result to the next full number

Example :

gear	rpm	speed @ rpm	formula	gear value to be entered in
1 st	3000	25	3000rpm / 25 <i>Kmh</i>	120
2 nd	3000	40	3000rpm / 40 <i>Kmh</i>	75
3 rd	3000	55	3000rpm / 55 <i>Kmh</i>	55
4 th	3000	82	3000rpm / 82 <i>Kmh</i>	37
5 th	3000	108	3000rpm / 108 <i>Kmh</i>	28

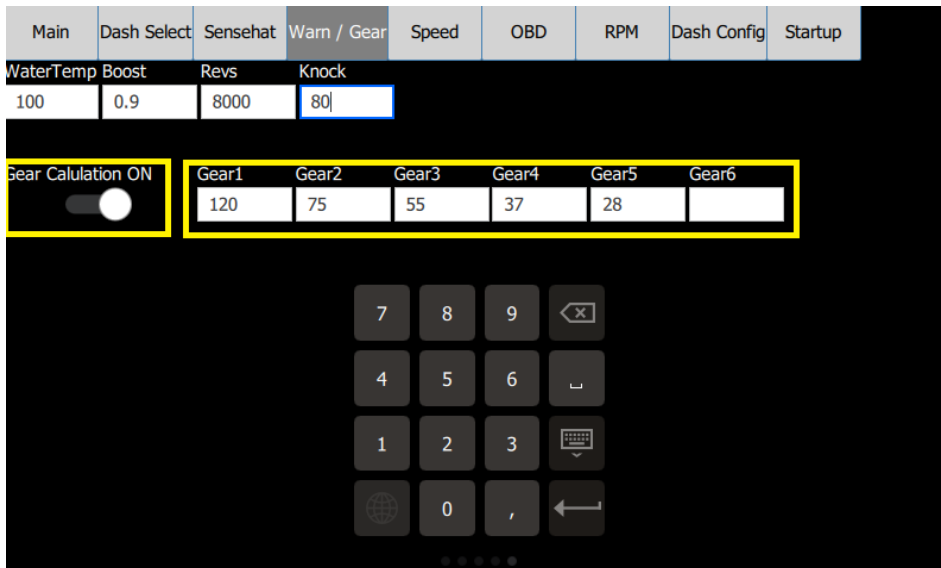

Useful non PowerTune related fact :

Now that you know the value for each gear you can now also calculate each gears top speed, or speed in a specific gear at a specific RPM

Lets say your car is a Mazda RX7 and your redline is 8100 RPM

Just take the rpm and divide it by the calculated gear value

$$1^{\text{st}} \text{ Gear} = 8100\text{rpm} / 120 = 67 \text{ Kmh}$$

$$2^{\text{nd}} \text{ Gear} = 8100\text{rpm} / 75 = 108 \text{ Kmh}$$

$$3^{\text{rd}} \text{ Gear} = 8100\text{rpm} / 55 = 147 \text{ Kmh}$$

$$4^{\text{th}} \text{ Gear} = 8100\text{rpm} / 37 = 219 \text{ Kmh}$$

$$5^{\text{th}} \text{ Gear} = 8100\text{rpm} / 28 = 289 \text{ Kmh}$$

GPS/Lap timer setup

The GPS and Laptimer dashes can be enabled from the dash select tab in the settings menu. PowerTune automatically calculates lap times based on the start/finish line of the particular track you are using via the GPS module coordinates. It does not require any manual input from the user, other than resetting the fastest lap time when required and selecting the current track from the dropdown boxes along the top right corner of the laptimer dash. Our testing has shown lap times are accurate to within 1/10th of a second. The GPS dash screen will only display map data if the display is connected to a WiFi network - typically this dash screen is not required to be active.


Datalogging

To start datalogging, enable the datalog switch in the settings menu. PowerTune will export the data to a CSV spreadsheet stored on the SD card of the unit. **Each time you toggle the datalog switch, the current datalog will be overwritten.** If you want to datalog multiple runs, ensure you change the logfile name each time, example run1, run2 ect

The datalog files can be found in the directory /opt/PowerTune when connecting to your display from a computer (more details below, refer to WINSCP).

(opt is a root folder, is it not within the home folder)

Note: Datalogs will be deleted when PowerTune is updated.

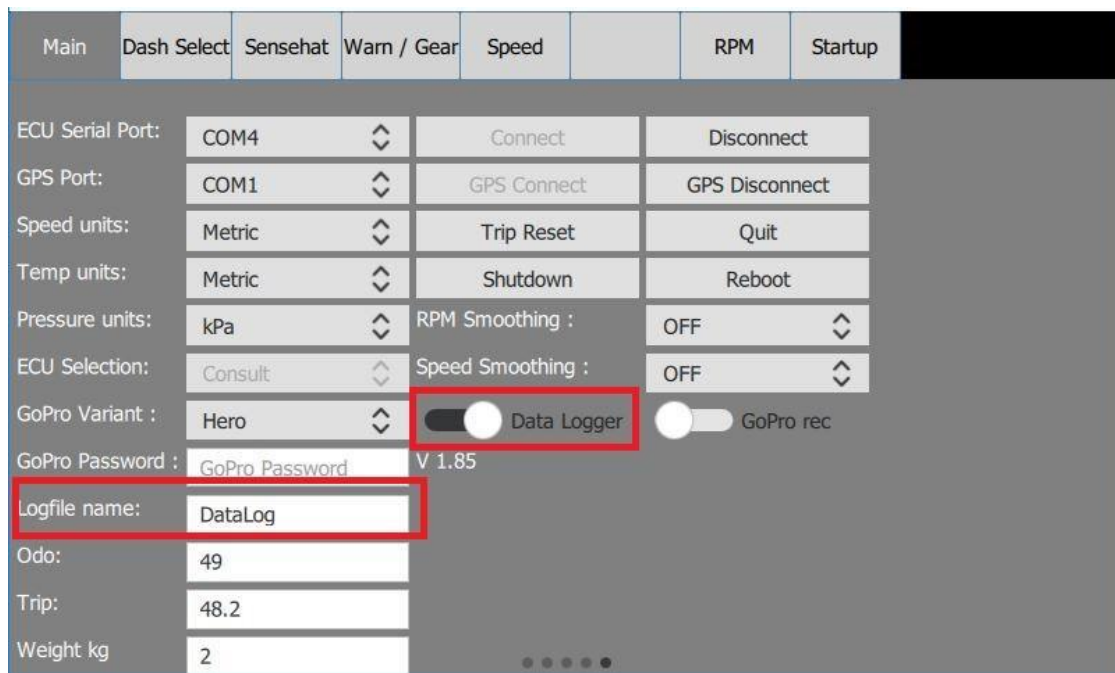

The screenshot shows the 'Dash Select' tab in the PowerTune settings menu. The interface includes various configuration options for the ECU, GPS, and sensors. Two specific elements are highlighted with red boxes: the 'Data Logger' toggle switch, which is currently turned on, and the 'Logfile name' field, which contains the text 'DataLog'. Other visible settings include ECU Serial Port (COM4), GPS Port (COM1), Speed units (Metric), Temp units (Metric), Pressure units (kPa), ECU Selection (Consult), GoPro Variant (Hero), GoPro Password (GoPro Password), Odo (49), Trip (48.2), and Weight kg (2).

Main	Dash Select	Sensehat	Warn / Gear	Speed		RPM	Startup
ECU Serial Port:	COM4		Connect	Disconnect			
GPS Port:	COM1		GPS Connect	GPS Disconnect			
Speed units:	Metric		Trip Reset	Quit			
Temp units:	Metric		Shutdown	Reboot			
Pressure units:	kPa		RPM Smoothing :	OFF			
ECU Selection:	Consult		Speed Smoothing :	OFF			
GoPro Variant :	Hero		☒ Data Logger	☐ GoPro rec			
GoPro Password :	GoPro Password		V 1.85				
Logfile name:	DataLog						
Odo:	49						
Trip:	48.2						
Weight kg	2						

GOPRO setup

PowerTune can integrate with GoPro cameras so you can trigger the GoPro recording from your PowerTune dash; and with datalogging enabled it will also log the moment the recording is started so you can overlay your ECU data onto video footage, just like a real racing car driver! First, quit

PowerTune from the settings menu, and connect the display to your GoPro's WiFi network (see WiFi setup in this manual for detailed steps). Once you have connected the WiFi, restart the display back into PowerTune by typing `sudo reboot now` (and then press enter)

Re-enter the GoPro password into the password box and when you are ready toggle the “GoPro rec” button. This will tell your GoPro to start recording, and if datalogging is enabled, this exact moment in time will be captured in the datalogs.

Main	Dash Select	Sensehat	Warn / Gear	Speed		RPM	Startup
ECU Serial Port:	COM4	⬆⬇⬆	Connect	Disconnect			
GPS Port:	COM1	⬆⬇⬆	GPS Connect	GPS Disconnect			
Speed units:	Metric	⬆⬇⬆	Trip Reset	Quit			
Temp units:	Metric	⬆⬇⬆	Shutdown	Reboot			
Pressure units:	kPa	⬆⬇⬆	RPM Smoothing :	OFF	⬆⬇⬆		
ECU Selection:	Consult	⬆⬇⬆	Speed Smoothing :	OFF	⬆⬇⬆		
GoPro Variant :	Hero	⬆⬇⬆	☒ Data Logger	☒ GoPro rec			
GoPro Password	GoPro Password	/ 1.85					
Logfile name:	DataLog						
Odo:	75						
Trip:	74.2						
Weight kg	2						

WIFI Setup + software update


Scroll across to the main settings menu and select “network”. Select your country in the top right corner and select “scan” - Locate your wifi network and select it. Tap into the passphrase box and enter your WiFi password. Once the password has been typed, press the button to close the keyboard (bottom right corner of keyboard) then press apply, the dash will reboot to connect. Return to the network tab of settings and press the update button to start the software update, which will take several minutes.

Accessing PowerTune from Laptop via WIFI

Install 'WINSCP' for Windows from: <https://winscp.net/eng/download.php>

Connect your display to your WiFi network (or via LAN cable) and obtain the IP address for the display. You can obtain the IP address by scrolling across to the network tab in settings and located the WLAN address, eg 192.168.0.10

In WINSCP, Enter your IP address into the host name field, username as 'pi' and password as 'raspberrypi' without the ' ' and select Login. Leave the port as whatever is selected by default. If you purchased the dash after 01/10/22 and the above login does not work, use login name "root" with no password

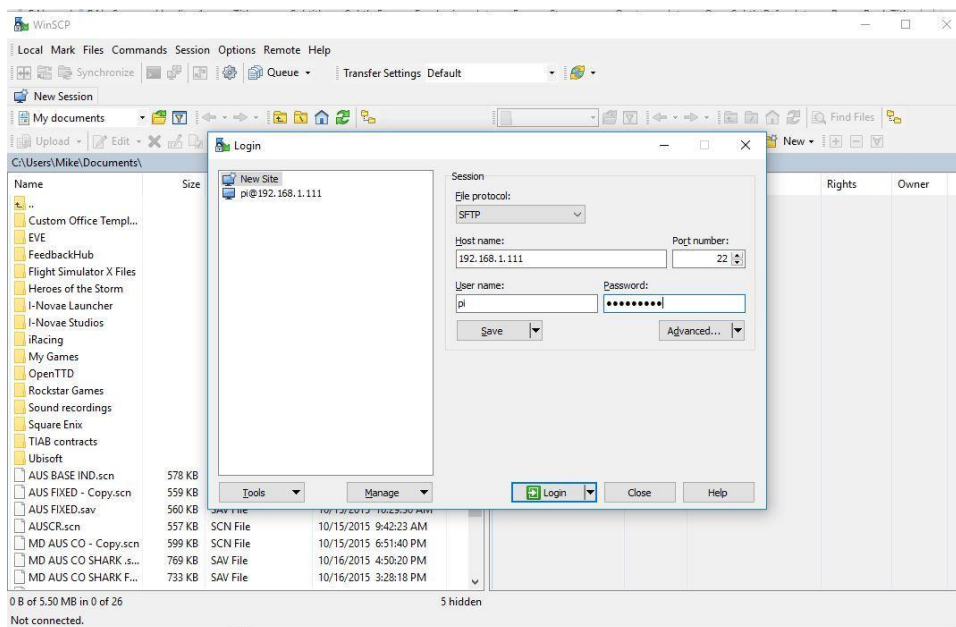



PowerTune
Digital